

Warewashing Small Single Skin Glasswasher with Drain Pump, 1 cycle, 30b/h

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


402080 (EGWSDP)

Glasswasher (small), single skin, with drain pump, 1 cycle, 30b/h

Short Form Specification

Item No. _____

Unit shall be Glasswasher type hot water rinsing for rack dimension of 400*400mm. Electrical characteristics to be 230 single phase operation with one wash cycle of 120 seconds. Rinse temperature and pressure guaranteed by built in pressure boiler. Washing performance is ensured by a powerful wash pump, revolving washing spray arms. Double skinned counter-balance door. 304 stainless steel construction to include door, frame, wash tank, wash arm and rinse arms. The unit shall include drain pump, rinse aid dispenser pump and be equipped with electric cable with Schuko plug.

Main Features

- Built-in pressure boiler designed to raise incoming water to a guaranteed minimum temperature of 82° C for sanitizing rinse. No external boiler is required.
- Washing system endowed with rotating washing arms, high powered wash pump and large capacity wash tank for professional washing.
- Maximum capacity of 30 racks per hour.
- 120 seconds cycle.
- Simple operation control panel.
- Solid double skinned counter-balance stainless steel door with hurt-free handle in plastic.
- Equipped with single phase electrical cable and Schuko plug for easy and fast installation.
- Easy service access to main components without moving the unit.

Construction

- Robust structure thanks to stainless steel construction.
- Equipped with drain pump for easy and quick installation without opening the machine.
- Unit to feature rinse aid dispenser pump.
- Requires only 1 phase 230V supply.
- Completely closed on the back by a cover plate.
- Internal components (arms and filter) are easy extractable.

Included Accessories


- 1 of Square basket for glasses PNC 864470
400x400x150mm
- 1 of Insert for 12 saucers, PNC 867048
290x90x75mm
- 1 of Square cutlery container, PNC 867049
89x113x113mm

Optional Accessories


- Square basket for glasses, PNC 867039
400x400x1100mm
- Round basket for glasses, PNC 867047
400x180mm
- Inclination insert for glasses PNC 867069
400x400 mm

APPROVAL: _____

Front

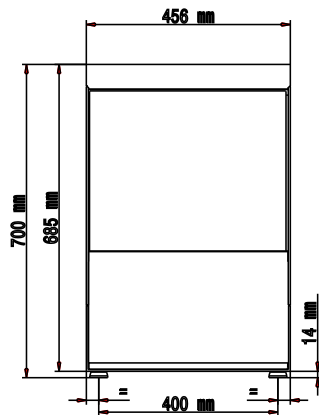


Side

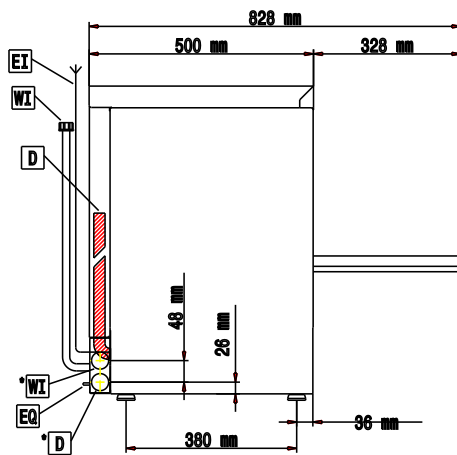

- CWII = Cold Water inlet 1 (cleaning)
 D = Drain
 EI = Electrical inlet (power)
 EO = Electrical Outlet
 WI = Water inlet
 XR = Rinse aid connection

Top

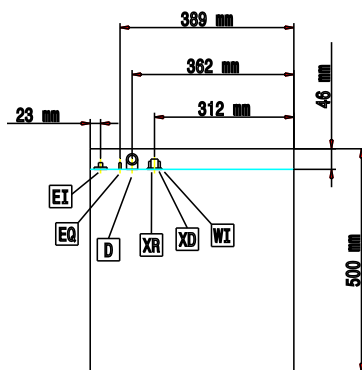

Electric

| | |
|--------------------------|------------------|
| Supply voltage: | |
| 402080 (EGWSDP) | 230 V/1 ph/50 Hz |
| Default Installed Power: | 2.7 kW |
| Tank heating elements: | 16 kW |

Water:

| | |
|---|----------|
| Pressure, bar min/max: | 2-5 bar |
| Water supply temperature*: | 10-65 °C |
| Drain line size: | 18mm |
| Washing tank capacity (lt): | 16 |
| Boiler Capacity (lt): | 2.5 |
| Incoming water line size: | 3/4" |
| Min hot rinse water consumption (lt/cycle)**: | 2 |

Key Information:

| | |
|------------------------------|---------------------|
| Washing cycle temperature: | 60 °C |
| Hot rinse cycle temperature: | 82 °C |
| Baskets per hour*: | 30 |
| N° of working cycles: | 1 (120) |
| Cell dimensions - width: | 400 mm |
| Cell dimensions - depth: | 400 mm |
| Cell dimensions - height: | 290 mm |
| External dimensions, Width: | 456 mm |
| External dimensions, Depth: | 495 mm |
| External dimensions, Height: | 700 mm |
| Net weight: | 35 kg |
| Shipping weight: | 36 kg |
| Shipping height: | 850 mm |
| Shipping width: | 620 mm |
| Shipping depth: | 590 mm |
| Shipping volume: | 0.31 m ³ |
| Noise level: | 61 dBA |