

Warewashing Small Single Skin Glasswasher, 1 cycle, 30b/h

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



402079 (EGWS)

Glasswasher (small), single skin, 1 cycle, 30b/h

Short Form Specification

Item No. _____

Unit shall be Glasswasher type hot water rinsing for rack dimension of 400*400mm. Electrical characteristics to be 230 single phase operation with one wash cycle of 120 seconds. Rinse temperature and pressure guaranteed by built in pressure boiler. Washing performance is ensured by a powerful wash pump, revolving washing spray arms. Double skinned counter-balance door. 304 stainless steel construction to include door, frame, wash tank, wash arm and rinse arms. The unit is equipped with rinse aid dispenser and electric cable with Schuko plug.

Main Features

- Easy service access to main components without moving the unit.
- Built-in pressure boiler designed to raise incoming water to a guaranteed minimum temperature of 82° C for sanitizing rinse. No external boiler is required.
- Washing system endowed with rotating washing arms, high powered wash pump and large capacity wash tank for professional washing.
- Maximum capacity of 30 racks per hour.
- 120 seconds cycle.
- Simple operation control panel.
- Solid double skinned counter-balance stainless steel door with hurt-free handle in plastic.
- Equipped with single phase electrical cable and Schuko plug for easy and fast installation.

Construction

- Robust structure thanks to stainless steel construction.
- Requires only 1 phase 230V supply.
- Internal components (arms and filter) are easy extractable.
- Completely closed on the back by a cover plate.
- Unit to feature rinse aid dispenser pump.

Included Accessories


- 1 of Square basket for glasses PNC 864470
400x400x150mm
- 1 of Insert for 12 saucers, PNC 867048
290X90x75mm
- 1 of Square cutlery container, PNC 867049
89x113x113mm

Optional Accessories


- Square basket for glasses, PNC 867039
400x400x1100mm
- Round basket for glasses, PNC 867047
400x180mm
- Inclination insert for glasses PNC 867069
400x400 mm

APPROVAL: _____

Front

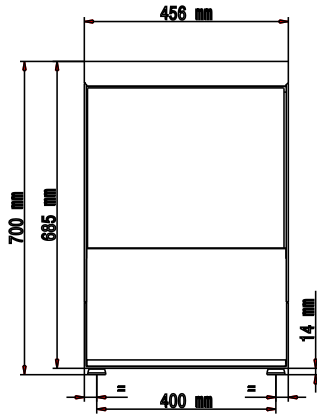


Side

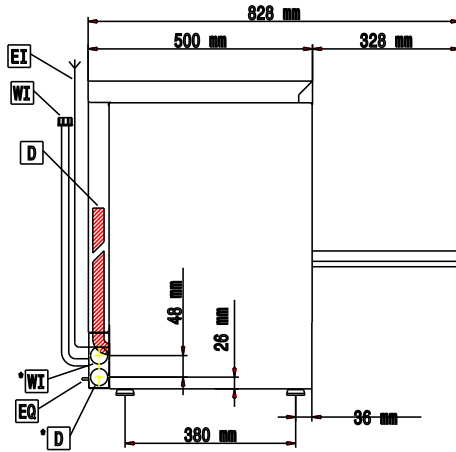

- CWII = Cold Water inlet 1 (cleaning)
- D = Drain
- EI = Electrical inlet (power)
- EO = Electrical Outlet
- WI = Water inlet
- XR = Rinse aid connection

Top

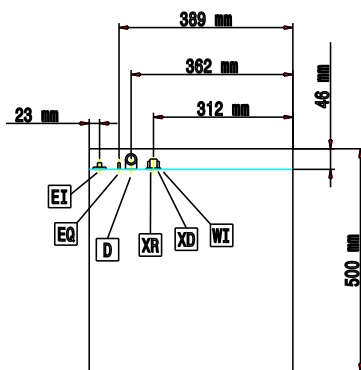

Electric

Supply voltage:	
402079 (EGWS)	230 V/1 ph/50 Hz
Default Installed Power:	2.7 kW
Tank heating elements:	2 kW

Water:

Pressure, bar min/max:	2-5 bar
Water supply temperature*:	10-65 °C
Drain line size:	18mm
Washing tank capacity (lt):	16
Boiler Capacity (lt):	2.5
Incoming water line size:	3/4"
Min hot rinse water consumption (lt/cycle)**:	2

Key Information:

Washing cycle temperature:	60 °C
Hot rinse cycle temperature:	82 °C
Baskets per hour*:	30
N° of working cycles:	1 (120)
Cell dimensions - width:	400 mm
Cell dimensions - depth:	400 mm
Cell dimensions - height:	290 mm
External dimensions, Width:	456 mm
External dimensions, Depth:	495 mm
External dimensions, Height:	700 mm
Net weight:	35 kg
Shipping weight:	39 kg
Shipping height:	850 mm
Shipping width:	580 mm
Shipping depth:	590 mm
Shipping volume:	0.29 m ³
Noise level:	61 dBA