

Planetary Mixers Stainless Steel Planetary Mixer, 20 It. - Floor Model

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
AIA #	

600232 (XBM20XB5) 20 It stoniess steel Planetary Mile Pice Steel Store and	 Advance of the second se			
Short Form Specification Body entirely in stainless steel. 302 AISI Stainless steel bowl - 20 It. capacity. Asynchronous motor with high start-up torque. Speeds, from 35 to 180 prm, to be lever operated while the machine is working, according to the tool and the mixture hardness. Planetary movement based on self lubricating gears, eliminating any risk of leaks. Water protected planetary system. Pivoting and removable wire safety screen. Water proof (IP55) and flat touch button control panel with 60 min. timer. A safety device will automatically stop the machine when the bowl is lowered. Removable and dismantied solid safety screen - made of a bisphenol-A free (BPA) copolyester. Bowl detction device allows the mixer to switch on only when the bowl and the safety screen are properly installed and positioned together. Adjustable feet for stability. Supplied with 3 tools: spiral hook, paddle and whisk. I of Bowl 20 It mixer PNC 650121 I of Spiral Hook 20 It PNC 650121 I of Paddle 20 It PNC 650121 I of Paddle 20 It PNC 650121 I of Paddle 20 It PNC 650121 I of Vinks 20 It mixer PNC 650121 I of Paddle 20 It PNC 650121 I of Vinks 20 It mixer PNC 650121 I of Paddle 20 It PNC 650121 I of Vinks 20 It mixer PNC 650121 I of Vinks 20 It mixer PNC 650121 I of Vinks 20 It mixer PNC 650121 I of Vinks 20 It PNC 650121 I of PAddle 20 It Mixer PNC 650121 I of Vinks 20 It mixer PNC 650121 I of Vinks 20 It mixer PNC 650121 I of I treductio	Short Form Specification Item No. Floor model, suitable for all kneading, blending and whipping operations. Body in stainless steel with 20 litre 18/8 (AIS 1302) stainless steel bowl. Powerful asynchronous motor (750 W) with mechanical speed variator (8 speed levels from 35 to 180 rpm.) Water protected planetary system. Pivoting and removable wire safety screen. Water protected planetary system. Pivoting and removable wire safety screen. Water protocycle will automatically stop the machine when the bowl is lowered. Removable and dismontide solid safety screen - made of a bisphenol-A free (BPA) copolyester. Bowl detction device allows the mixer to switch on only when the bowl and the safety screen are properly installed and positioned together. Adjustable feet for stability. Supplied with 3 tools: spiral hook, paddle and whisk. I of Paddle 20 It PNC 650121 I of Spiral Hook 20 It PNC 650121 I of Paddle 20 It PNC 650121 D It reduction kit (bowl, spiral hook, paddle and whisk. 	600232 (XBM20XB3)	Mixer, bowl detection device and SOLID BPA free safety screen, with mechanical speed variation. Floor model. Equipped with spiral hook, paddle and	 Professional beater mixer that provides all the basic mixer functions: kneading of all sort of pastes, mixing of semi-liquid products, emulsions and various sauces. Delivered with: Spiral Hook, Paddle, Wire Whisk and Mixing Bowl for 20 It Waterproof touch button control panel with timer setting and display. Wire safety screen fitted with a removable chute to add products while working, thus ensuring operator safety. Pivoting and removable wire safety screen for easier and better cleaning. Maximum capacity (flour, with 60% of hydration) 6 kg, suitable for 50-150 meals per service. Raising and lowering of the bowl controlled by lever with an automatic locking of the bowl when in the raised position. Safety device will automatically stop the machine when the bowl is lowered. Mechanical speed variator. Bowl detection device allows the mixer to switch on only when the bowl and the solid safety screen are properly installed and positioned together. Solid BPA-free safety screen, covering the stainless steel wire one, limits the flour and unsafe dust particles when used in bakery and pastry
 302 AISI Stainless steel bowl - 20 It. capacity. Asynchronous motor with high start-up torque. 8 speeds, from 35 to 180 prm, to be lever operated while the machine is working, according to the tool and the mixture hardness. Planetary movement based on self lubricating gears, eliminating any risk of leaks. Water protected planetary system. Pivoting and removable wire safety screen. Water proof (IP55) and flat touch button control panel with 60 min. timer. A safety device will automatically stop the machine is lowered. Removable and dismantled solid safety screen - made of a bisphenol-A free (BPA) copolyester. Bowl detction device allows the mixer to switch on only when the bowl and the safety screen are properly installed and positioned together. Adjustable feet for stability. Supplied with 3 tools: spiral hook, paddle and whisk. I of Bowl 20 It mixer PNC 650121 I of Paddle 20 It PNC 653114 I of Paddle 20 It PNC 653114 I of Paddle 20 It PNC 650121 I of Paddle 20 It PNC 650121 I of Paddle 20 It PNC 650121 	 302 A ISI Stainless steel bowl - 20 It. capacity. Asynchronous motor with high start-up torque. 8 speeds, from 35 to 180 prm, to be lever operated while the machine is working, according to the tool and the mixture hardness. Planetary movement based on self lubricating gears, eliminating any risk of leaks. Water protected planetary system. Pivoting and removable wire safety screen. Water proof (JP55) and flat touch button control panel with 60 min. timer. A safety device will automatically stop the machine when the bowl is lowered. Removable and dismantled solid safety screen - made of a bisphenol-A free (BPA) copolyester. Bowl detction device allows the mixer to switch on only when the bowl and the safety screen are properly installed and positioned together. Adjustable feet for stability. Supplied with 3 tools: spiral hook, paddle and whisk. Jof Bowl 20 It mixer PNC 650121 1 of Paddle 20 It 1 of Paddle 20 It PNC 650121 PNC 650121 	Short Form Spec	ification	
Item No. Asynchronous motor with high start-up torque. Asynchronous motor with high start-up torque. Speeds, from 35 to 180 prm, to be lever operated while the machine is working, according to the tool and the mixture hardness. Planetary movement based on self lubricating gears, eliminating any risk of leaks. Water protected planetary system. Pivoting and removable wire safety screen. Water proof (IP55) and flat touch button control panel with 60 min. timer. A safety device will automatically stop the machine is lowered. Removable and dismantled solid safety screen - made of a bisphenol-A free (BPA) coopolyester. Bowl detction device allows the mixer to switch on only when the bowl and the safety screen are properly installed and positioned together. Adjustable feet for stability. Adjustable feet to perfect stability. Supplied with 3 tools: spiral hook, paddle and whisk. I of Bowl 20 It mixer PNC 650121 I of Paddle 20 It <l< th=""><th>Item No. Asynchronous motor with high start-up torque. Asynchronous motor with high start-up torque. Speeds, from 35 to 180 prm, to be lever operated while the machine is working, according to the tool and the mixture hardness. Planetary movement based on self lubricating gears, eliminating any risk of leaks. Planetary movement based on self lubricating gears, eliminating any risk of leaks. Water protected planetary system. Pivoting and removable wire safety screen. Water proof (IP55) and fild touch button control panel with 60 min. timer. A safety device will automatically stop the machine when the bowl is lowered. Removable and dismantled solid safety screen - made of a bisphenol-A free (BPA) copolyester. Bowl addite safety screen are properly installed and positioned together. Adjustable feet for stability. Supplied with 3 tools: spiral hook, paddle and whisk. I of Bowl 20 It mixer PNC 650121 I of Paddle 20 It PNC 653114 I of Paddle 20 It PNC 653114 I of Paddle 20 It PNC 650121 I of Paddle 20 It PNC 650121 I of It reduction kit (bowl, spiral hook, paddle whisk) for 20 It planetary mixers </th></l<>	Item No. Asynchronous motor with high start-up torque. Asynchronous motor with high start-up torque. Speeds, from 35 to 180 prm, to be lever operated while the machine is working, according to the tool and the mixture hardness. Planetary movement based on self lubricating gears, eliminating any risk of leaks. Planetary movement based on self lubricating gears, eliminating any risk of leaks. Water protected planetary system. Pivoting and removable wire safety screen. Water proof (IP55) and fild touch button control panel with 60 min. timer. A safety device will automatically stop the machine when the bowl is lowered. Removable and dismantled solid safety screen - made of a bisphenol-A free (BPA) copolyester. Bowl addite safety screen are properly installed and positioned together. Adjustable feet for stability. Supplied with 3 tools: spiral hook, paddle and whisk. I of Bowl 20 It mixer PNC 650121 I of Paddle 20 It PNC 653114 I of Paddle 20 It PNC 653114 I of Paddle 20 It PNC 650121 I of Paddle 20 It PNC 650121 I of It reduction kit (bowl, spiral hook, paddle whisk) for 20 It planetary mixers 	Short rorm spec	incution	
 8 speeds, from 35 to 180 prm, to be lever operated while the machine is working, according to the tool and the mixture hardness. Planetary movement based on self lubricating gears, eliminating any risk of leaks. Planetary movement based on self lubricating gears, eliminating any risk of leaks. Water protected planetary system. Pivoting and removable wire safety screen. Water proof (IP55) and flat touch button control panel with 60 min. timer. A safety device will automatically stop the machine when the bowl is lowered. Removable and dismantled solid safety screen - made of a bisphenol-A free (BPA) copolyester. Bowl detction device allows the mixer to switch on only when the bowl and the safety screen are properly installed and positioned together. Adjustable feet for stability. Supplied with 3 tools: spiral hook, paddle and whisk. Included Accessories I of Bowl 20 It mixer PNC 650121 I of Paddle 20 It PNC 650121 I of I treduction kit (bowl, spiral PNC 650121 	 8 speeds, from 35 to 180 prm, to be lever operated while the machine is working, according to the tool and the mixture hardness. 9 8 speeds, from 35 to 180 prm, to be lever operated while the machine is working, according to the tool and the mixture hardness. 9 Planetary movement based on self lubricating gears, eliminating any risk of leaks. 9 Planetary movement based on self lubricating gears, eliminating any risk of leaks. 9 Planetary movement based on self lubricating gears, eliminating any risk of leaks. 9 Planetary movement based on self lubricating gears, eliminating any risk of leaks. 9 Planetary movement based on self lubricating gears, eliminating any risk of leaks. 9 Power: 750 watts. 9 Power: 750 Power:	Item No		
	APPROVAL:	Floor model, suitable for all operations. Body in stainless stainless steel bowl. Powerfu mechanical speed variator (Water protected planetary sy safety screen. Water proof (panel with 60 min. timer. A so the machine when the bo dismantled solid safety scre (BPA) copolyester. Bowl de switch on only when the bow installed and positioned tog	s steel with 20 litre 18/8 (AISI 302) al asynchronous motor (750 W) with 8 speed levels from 35 to 180 rpm). ystem. Pivoting and removable wire IP55) and flat touch button control afety device will automatically stop owl is lowered. Removable and een - made of a bisphenol-A free etction device allows the mixer to I and the safety screen are properly ether. Adjustable feet for stability.	 8 speeds, from 35 to 180 prm, to be lever operated while the machine is working, according to the tool and the mixture hardness. Planetary movement based on self lubricating gears, eliminating any risk of leaks. Water protected planetary system (IP55 electrical controls, IP23 overall machine). Power: 750 watts. The solid safety screen and the stainless steel wire structure are both removable and dismantled for cleaning and are dishwasher safe. Adjustable feet to perfect stability. Included Accessories 1 of Bowl 20 It mixer PNC 650121 1 of Spiral Hook 20 It PNC 653116 Optional Accessories Bowl 20 It mixer PNC 650121 PNC 650121 PNC 650121 PNC 650121 PNC 650121 PNC 650121

E



•	Whisk 20 lt	PNC 653109	
•	Spiral Hook 20 It	PNC 653114	
•	Paddle 20 It	PNC 653116	
•	Reinforced Whisk 20 It (for heavy duty use)	PNC 653254	


PNC 653552

• Kit wheels for 20/30/40 litre planetary mixers (only XB models)





Planetary Mixers Stainless Steel Planetary Mixer, 20 It. - Floor Model

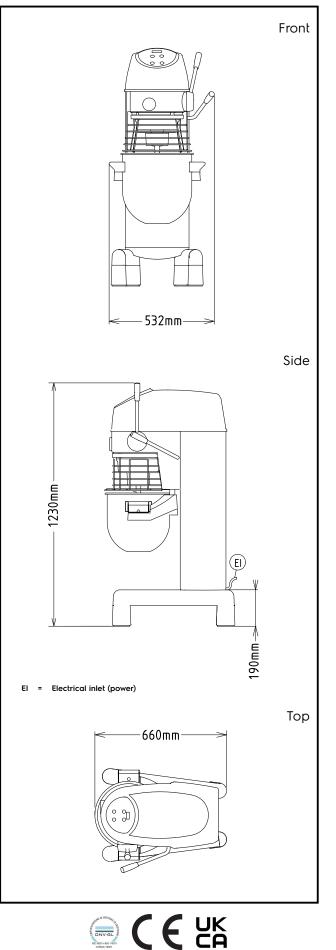

Electric				
Supply voltage:	200-240/380-415 V/3 ph/50			
600232 (XBM20XB3)	Hz			
Capacity:				
Performance (up to):	6 kg/Cycle			
Capacity:	20 litres			
Key Information:				
External dimensions, Width:	521 mm			
External dimensions, Depth:	685 mm			
External dimensions, Height:	1230 mm			
Shipping weight:	109 kg			
Cold water paste:	6 kg with Spiral hook			
Egg whites:	32 with Whisk			

Planetary Mixers Stainless Steel Planetary Mixer, 20 It. - Floor Model

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.