

Vegetable Slicer TRK45 Cutter Slicer - 4.5 LT -Variable Speed

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



600482 (TRK45YI)

Combined Cutter/Vegetable Slicer, variable speed 300 to 3700 rpm. Supplied with 4,5 It stainless steel Cutter bowl and lever operated feed hopper (CB certification) -Schuko plug

Short Form Specification

Item No.

3 in 1 machine: cutter, emulsifier and slicer to slice, grate, liquidise, mix and mince in a matter of seconds. Easily change from vegetable slicer to food processor without any tool.

All parts in contact with food are removable, dismountable and dw safe. Incly system to change the motor base orientation (20°) to facilitate loading and unloading operations with the vegetable slicer attachment.

Vegetable slicer attachment: Universal vegetable slicer offering more than 80 different types of cuts. Long vegetable hopper (60mm diameter) integrated in the wide 3/4 moon stainless steel round hopper (215cm²). User-friendly stainless steel lever (better pressure control, with less effort for arms and shoulder), designed for right and left handed users. High discharge zone (up to 20cm) for GN containers. Automatic start/stop function will stop the machine when the lever hopper is lifted and will restart automatically when lowered.

Cutter-mixer: Stainless steel 4,5 litre bowl with unique design for mixing both large or small quantities. Unique high chimney increases the real capacity of the bowl (use up to 75% of nominal capacity). Transparent lid to check consistency of food and to eventually add ingredients without having to open the lid. Hinged cover, when lifted, remains open to permit a fast and easy check of preparation. Ergonomic and easily dismountable scraper, in heavy duty composite material, for better homogenization. Micro toothed blades in 420 AISI stainless steel. Multiple safety devices ensure the machine will only operate when the cover is properly closed and all parts are correctly

positioned.

Asynchronous industrial motor for heavy duty and longer life. Flat and waterproof control panel with on/off button, pulse function and variable speed (from 300 to 3700rpm).

Main Features

- 3 in 1 machine: cutter, emulsifier and vegetable slicer to slice, grate, liquidise, mix and mince in a matter of seconds.
- Incly system to incline motor base at 20° to better fit the vegetable slicer attachment.
- · Delivered with:
 - -Stainless steel lever operated feed hopper
 - -4,5 lt stainless steel cutter bowl, transparent lid, scraper and microtoothed blade rotor
- Vegetable slicer with slicing, grating, shredding (julienne) as well as dicing and French fries cutting capability.
- Long vegetables round hopper integrated in the feed arm, 3/4 moon roundish hopper to limit pre cutting operations.
- Emulsifier function (scraper) included as standard.
- Base fixed cover for a better handling.
- Red OFF, green ON buttons.
- Pulse function for coarse chopping.
- All parts in contact with food are removable without the use of tools, completely dismountable and dishwasher safe.
- Automatic restart of the machine with the 3/4 moon shaped pusher in position.
- Magnetic safety system and motor brake. Prevents machine from running when vegetable preparation lever and/or hopper are lifted or when cutter lid is not properly closed.
- Automatic speed limitation according to the selected function (slicer or cutter).
- Complete and wide selection of blades and grids available (diam. 205 mm).
- Capacity:
 - -vegetable slicer productivity 550 kg/h, suitable for 100-400 meals for table service, up to 800 meals for catering service
 - -cutter mixer working capacity from 100 g to 2 kg, for 50-80 meals per service

Construction

- Asynchronous industrial motor with no brushes for high reliability and quiet functioning, stainless steel motor shaft.
- All blades (available on request) are made in stainless steel and dishwasher safe.
- Stainless steel bowl has a high chimney to ensure high productivity also when processing liquids.
- Feeding arm and hopper are made entirely in stainless steel. Aluminum motor housing.
- Vegetable cutting at 4 speeds up to 800 rpm. Food processing at 10 variable speeds: 300-3700 rpm.
- Power: 1.3 HP.
- IPX5 (IP55) waterproof, flat, touch-control panel.
- Compact and portable design.
- Improved ventilation system to manage smoothly

APPROVAL:





Vegetable Slicer TRK45 Cutter Slicer - 4.5 LT -Variable Speed

heavy duty use. • Improved incly system for better stab	ility		 Stainless steel shredding disc with S-PNC 650159 blades 2x10 mm 	
 Improved fixing of long vegetable has Main on/off switch for added safety. 	=		 Stainless steel pressing/slicing disc with PNC 650160 S-blades 10 mm (can be used for slicing or combined with grids) 	
Main switch ON/OFF on the back of	the appliance.		5 .	
Included Accessories			or combined with grids)	
 1 of Stainless steel bowl for 4,5 lt cutter mixer 	PNC 653589		 Stainless steel pressing/slicing disc with PNC 650162 corrugated S-blades 8 mm (can be 	
 1 of Ejector disc for vegetable slicer TRS/TRK/TR210 	PNC 653772		used for slicing or combined with grids)	
Optional Accessories			 Stainless steel pressing/slicing disc with PNC 650164 Corrugated S-blades 10 mm (can be 	
Stainless steel shredding disc with S- blades 4x4 mm	PNC 650077		used for slicing or combined with grids)	
 Stainless steel shredding disc with S- blades 6x6 mm (can also be used for French fries) 	PNC 650078		 Stainless steel pressing/slicing disc with PNC 650165 S-blades 13 mm (can be used for slicing or combined with grids) 	
Stainless steel shredding disc with S- blades 8x8 mm (can also be used	PNC 650079		blades 2x2 mm	
for French fries)Stainless steel shredding disc with S-	PNC 650080		 Stainless steel shredding disc with S-PNC 650167 blades 3x3 mm 	
blades 10x10 mm (can also be used for French fries)	1110 030000	_	 Set of 4 stainless steel discs (2mm and PNC 650178 5mm slicing pressing discs, 2mm and 	
 Stainless steel pressing/slicing disc with S-blades 0,6 mm (can be used for slicing or combined with grids) 	PNC 650081		7mm grating discs) Stainless steel work table with folding PNC 653283 Shelves and disk rack for TRK and TRS	
• Stainless steel pressing/slicing disc	PNC 650082		table top models	
with S-blades 1 mm (can be used for	•		 Dicing grid 5x5 mm PNC 653566 	
slicing or combined with grids)			 Dicing grid 8x8 mm PNC 653567 	
Stainless steel pressing/slicing disc	PNC 650083		 Dicing grid 10x10 mm PNC 653568 	
with S-blades 2 mm (can be used for slicing or combined with grids)			 Dicing grid 12x12 mm PNC 653569 	
<i>5</i> ,	DNC 450007			
 Stainless steel pressing/slicing disc with S-blades 3 mm (can be used 	PNC 650084	_	3 3	
for slicing or combined with grids)			·	_
 Stainless steel pressing/slicing disc 	PNC 650085		•	
with S-blades 4 mm (can be used	1140 030003			
for slicing or combined with grids)			 Stainless steel bowl for 4,5 lt cutter PNC 653589 mixer 	
Stainless steel pressing/slicing disc with S-blades 5 mm (can be used	PNC 650086			
for slicing or combined with grids)	DNG / 50007		 Stainless steel grating disc 2 mm PNC 653773 	
 Stainless steel pressing/slicing disc with S-blades 6 mm (can be used 	PNC 650087			
for slicing or combined with grids)				
Stainless steel pressing/slicing disc	PNC 650088		3 3	
with S-blades 8 mm (can be used				
for slicing or combined with grids)				_
 Stainless steel pressing/slicing disc with corrugated S-blades 2 mm (can be used for slicing or combined 	PNC 650089	Ц	and bread	
with grids)			and bread	
 Stainless steel pressing/slicing disc with corrugated S-blades 3 mm (can be used for slicing or combined with grids) 	PNC 650090			
 Stainless steel pressing/slicing disc with corrugated S-blades 6 mm (can be used for slicing or combined with grids) 	PNC 650091			
 Bistrot Pack-set stainless steel discs (2mm and 5mm slicing pressing disc, 2mm grating disc) 	PNC 650092			
Stainless steel shredding disc with S- blades 2x8 mm	PNC 650158			














Vegetable Slicer TRK45 Cutter Slicer - 4.5 LT -Variable Speed

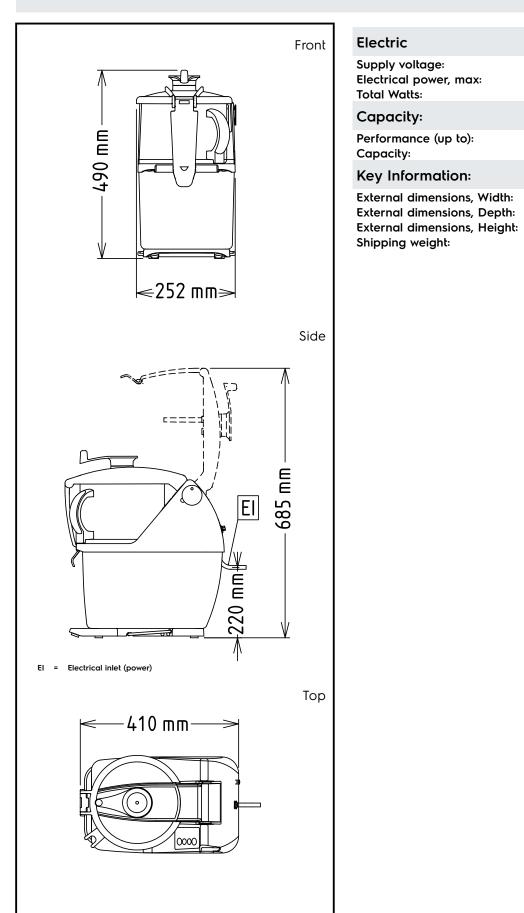

ONVEL CE IEC IECE

Electric

Supply voltage: 200-240 V/1N ph/50/60 Hz
Electrical power, max: 1 kW
Total Watts: 1 kW

Capacity:

Performance (up to): 550 kg/Cycle
Capacity: 4.5 litres

Key Information:

External dimensions, Width: 252 mm

485 mm

505 mm

29 kg

