

Vegetable Slicer TRK45 Cutter Slicer - 4.5 LT -Variable Speed

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



600481 (TRK45Y)

Combined Cutter/Vegetable Slicer, variable speed 300 to 3700 rpm. Supplied with 4,5 It stainless steel Cutter bowl and lever operated feed hopper

Short Form Specification

Item No.

3 in 1 machine: cutter, emulsifier and slicer to slice, grate, liquidise, mix and mince in a matter of seconds. Easily change from vegetable slicer to food processor without any tool.

All parts in contact with food are removable, dismountable and dw safe. Incly system to change the motor base orientation (20°) to facilitate loading and unloading operations with the vegetable slicer attachment.

Vegetable slicer attachment: Universal vegetable slicer offering more than 80 different types of cuts. Long vegetable hopper (60mm diameter) integrated in the wide 3/4 moon stainless steel round hopper (215cm²). User-friendly stainless steel lever (better pressure control, with less effort for arms and shoulder), designed for right and left handed users. High discharge zone (up to 20cm) for GN containers. Automatic start/stop function will stop the machine when the lever hopper is lifted and will restart automatically when lowered.

Cutter-mixer: Stainless steel 4,5 litre bowl with unique design for mixing both large or small quantities. Unique high chimney increases the real capacity of the bowl (use up to 75% of nominal capacity). Transparent lid to check consistency of food and to eventually add ingredients without having to open the lid. Hinged cover, when lifted, remains open to permit a fast and easy check of preparation. Ergonomic and easily dismountable scraper, in heavy duty composite material, for better homogenization. Micro toothed blades in 420 AISI stainless steel. Multiple safety devices ensure the machine will only operate when the cover is properly closed and all parts are correctly

positioned.

Asynchronous industrial motor for heavy duty and longer life. Flat and waterproof control panel with on/off button, pulse function and variable speed (from 300 to 3700rpm).

Main Features

- 3 in 1 machine: cutter, emulsifier and vegetable slicer to slice, grate, liquidise, mix and mince in a matter of seconds.
- Incly system to incline motor base at 20° to better fit the vegetable slicer attachment.
- · Delivered with:
 - -Stainless steel lever operated feed hopper
 - -4,5 lt stainless steel cutter bowl, transparent lid, scraper and microtoothed blade rotor
- Vegetable slicer with slicing, grating, shredding (julienne) as well as dicing and French fries cutting capability.
- Long vegetables round hopper integrated in the feed arm, 3/4 moon roundish hopper to limit pre cutting operations.
- Emulsifier function (scraper) included as standard.
- Base fixed cover for a better handling.
- Pulse function for coarse chopping.
- All parts in contact with food are removable without the use of tools, completely dismountable and dishwasher safe.
- Automatic restart of the machine with the 3/4 moon shaped pusher in position.
- Magnetic safety system and motor brake. Prevents machine from running when vegetable preparation lever and/or hopper are lifted or when cutter lid is not properly closed.
- Automatic speed limitation according to the selected function (slicer or cutter).
- Complete and wide selection of blades and grids available (diam. 205 mm).
- Capacity:
 - -vegetable slicer productivity 550 kg/h, suitable for 100-400 meals for table service, up to 800 meals for catering service
 - -cutter mixer working capacity from 100 g to 2 kg, for 50-80 meals per service

Construction

- Asynchronous industrial motor with no brushes for high reliability and quiet functioning, stainless steel motor shaft.
- All blades (available on request) are made in stainless steel and dishwasher safe.
- Stainless steel bowl has a high chimney to ensure high productivity also when processing liquids.
- Feeding arm and hopper are made entirely in stainless steel. Aluminum motor housing.
- Vegetable cutting at 4 speeds up to 800 rpm. Food processing at 10 variable speeds: 300-3700 rpm.
- Power: 1.3 HP.
- IPX5 (IP55) waterproof, flat, touch-control panel.
- Compact and portable design.
- Improved ventilation system to manage smoothly heavy duty use.

APPROVAL:






Vegetable Slicer TRK45 Cutter Slicer - 4.5 LT -Variable Speed

Improved incly system for better stabilImproved fixing of long vegetable hope	-	•	 Stainless steel pressing/slicing disc with S-blades 12 mm (can be used for slicing or combined with grids) 	PNC 650161	
Included Accessories		•	• Stainless steel pressing/slicing disc with	PNC 650162	
	PNC 653589		corrugated S-blades 8 mm (can be used for slicing or combined with grids)		
• 1 of Ejector disc	PNC 653772		Stainless steel pressing/slicing disc with	PNC 650164	
Optional Accessories			corrugated S-blades 10 mm (can be		
• Stainless steel shredding disc with S-	PNC 650077		used for slicing or combined with grids)		
Stainless steel shredding disc with S-blades 6x6 mm (can also be used)	PNC 650078		 Stainless steel pressing/slicing disc with S-blades 13 mm (can be used for slicing or combined with grids) 	PNC 650165	
 for French fries) Stainless steel shredding disc with S-blades 8x8 mm (san also be used 	PNC 650079		• Stainless steel shredding disc with S- blades 2x2 mm	PNC 650166	
blades 8x8 mm (can also be used for French fries)			 Stainless steel shredding disc with S- blades 3x3 mm 	PNC 650167	
 Stainless steel shredding disc with S- blades 10x10 mm (can also be used for French fries) 	PNC 650080		 Set of 4 stainless steel discs (2mm and 5mm slicing pressing discs, 2mm and 7mm grating discs) 	PNC 650178	
 Stainless steel pressing/slicing disc with S-blades 0,6 mm (can be used for slicing or combined with grids) 	PNC 650081		 Stainless steel work table with folding shelves and disk rack for TRK and TRS table top models 	PNC 653283	
	PNC 650082		Dicing grid 5x5 mm	PNC 653566	
with S-blades 1 mm (can be used for slicing or combined with grids)			Dicing grid 8x8 mm	PNC 653567	
<i>G</i> ,	PNC 650083		Dicing grid 10x10 mm	PNC 653568	
with S-blades 2 mm (can be used			Dicing grid 12x12 mm	PNC 653569	
for slicing or combined with grids)	DNG / 5000 /		• Dicing grid 20x20 mm	PNC 653570	
 Stainless steel pressing/slicing disc with S-blades 3 mm (can be used 	PNC 650084		• Grid for chips 6x6 mm	PNC 653571	
for slicing or combined with grids)			• Grid for chips 8x8 mm	PNC 653572	
	PNC 650085	1 1	 Grid for chips 10x10 mm Stainless steel bowl for 4,5 lt cutter mixer 	PNC 653573 PNC 653589	
•	PNC 650086		• Ejector disc	PNC 653772	
with S-blades 5 mm (can be used		•	 Stainless steel grating disc 2 mm 	PNC 653773	
for slicing or combined with grids)			 Stainless steel grating disc 3 mm 	PNC 653774	
	PNC 650087		 Stainless steel grating disc 4 mm 	PNC 653775	
with S-blades 6 mm (can be used for slicing or combined with grids)			• Stainless steel grating disc 7 mm	PNC 653776	
o ,	PNC 650088		Stainless steel grating disc 9 mmStainless steel grating disc for knoedeln	PNC 653777 PNC 653778	
for slicing or combined with grids)		_	and breadStainless steel grating disc for parmesan	DNIC 653770	
with corrugated S-blades 2 mm (can be used for slicing or combined with grids)	PNC 650089	<u> </u>	and bread	FINC 033777	J
 Stainless steel pressing/slicing disc with corrugated S-blades 3 mm (can be used for slicing or combined with grids) 	PNC 650090				
 Stainless steel pressing/slicing disc with corrugated S-blades 6 mm (can be used for slicing or combined with grids) 	PNC 650091				
	PNC 650092				
 Stainless steel shredding disc with S- blades 2x8 mm 	PNC 650158				
 Stainless steel shredding disc with S- blades 2x10 mm 	PNC 650159				
	PNC 650160				





Vegetable Slicer TRK45 Cutter Slicer - 4.5 LT -Variable Speed

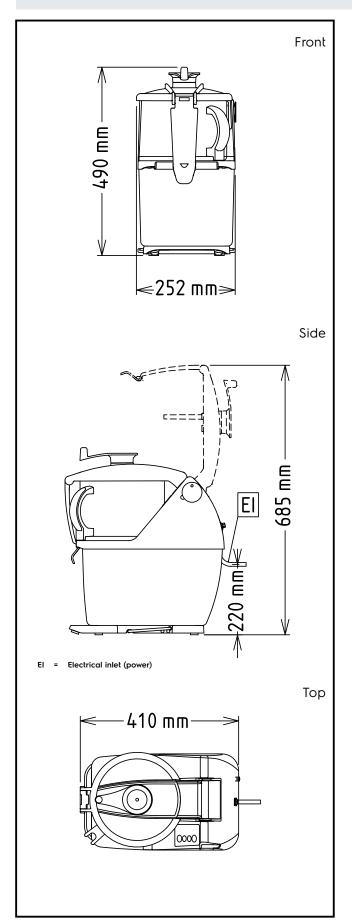

Electric

Supply voltage: 200-240 V/1N ph/50/60 Hz
Electrical power, max: 1 kW
Total Watts: 1 kW

Capacity:

Performance (up to): 550 kg/hour

4.5 litres

Key Information:

Capacity:

External dimensions, Width: 252 mm
External dimensions, Depth: 485 mm
External dimensions, Height: 505 mm

Shipping weight: ISO 9001; ISO 14001 kg

