Electrolux PROFESSIONAL

Service Trollevs Three Tier

• F • L • S • C	ain Feature ramework in velded. oad capacity eamless sou louble-folded ramework. helves size 120 proting Ø 12 prakes, fitted w Construction

361222 (STR123)

3-tier Service Trolley 1200mm

Short Form Specification

Item No.

Constructed in 304 AISI stainless steel. Framework in mm25 tubing, completely welded. Seamless, sound-absorbing, shelves with doublefolded edges. Shelves are welded to the framework. N. 4 swivelling castors, two with brakes, mm125 in diameter, fitted with plastic bumpers. Shelves size mm1200x600. Load capacity: 150 kg, uniformly distributed.

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
AIA #	

es


- 25 mm tubing, completely
- of 150 kg uniformly distributed.
- und-absorbing shelves with edges welded to the
- 00x600 mm.
- 5 mm wheels, 2 of which with ith plastic bumpers

tirely in 304 AISI stainless steel.

APPROVAL:



Service Trolleys Three Tier Service Trolley 1200 mm

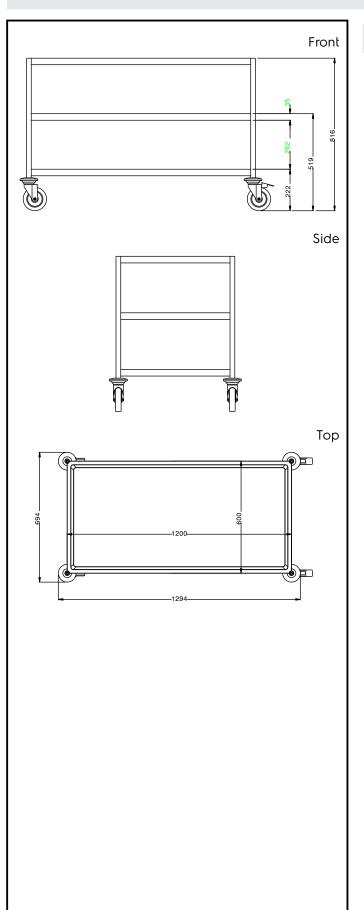

Key Information:

External dimensions, Width:	
361222 (STR123)	1295 mm
External dimensions, Depth:	695 mm
External dimensions, Height:	816 mm
Wheel material:	Zinc plated
Wheel diameter:	Ø 125
Net weight:	31 kg

Service Trolleys Three Tier Service Trolley 1200 mm

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.