

## Service Trolleys

### Three Tier Service Trolley 1200 mm

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



361222 (STR123)

3-tier Service Trolley 1200mm

### Short Form Specification

**Item No.** \_\_\_\_\_

Constructed in 304 AISI stainless steel. Framework in mm25 tubing, completely welded. Seamless, sound-absorbing, shelves with double-folded edges. Shelves are welded to the framework. N. 4 swivelling castors, two with brakes, mm125 in diameter, fitted with plastic bumpers. Shelves size mm1200x600. Load capacity: 150 kg, uniformly distributed.

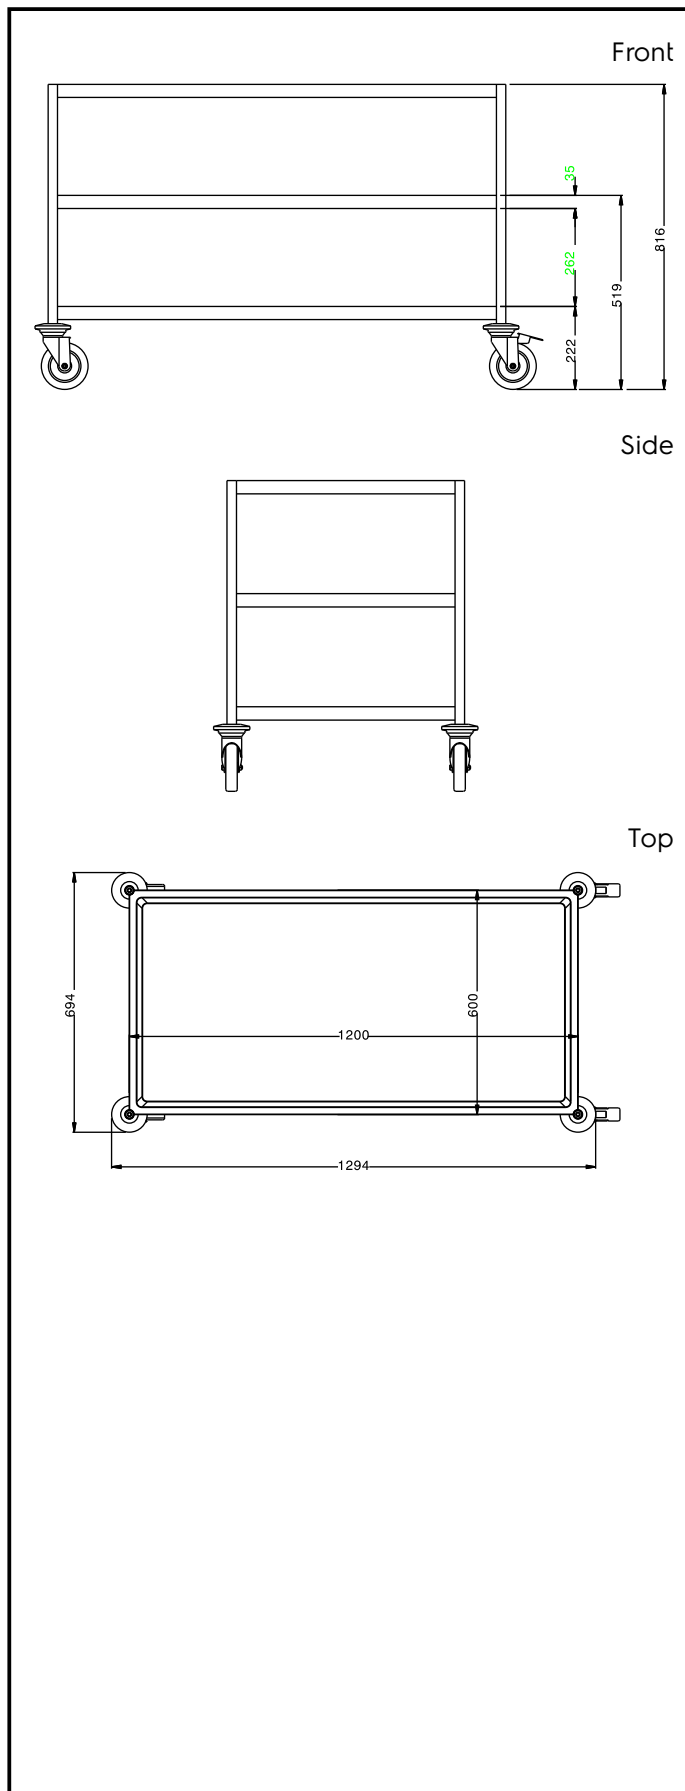
### Main Features

- Framework in 25 mm tubing, completely welded.
- Load capacity of 150 kg uniformly distributed.
- Seamless sound-absorbing shelves with double-folded edges welded to the framework.
- Shelves size 1200x600 mm.
- 4 pivoting Ø 125 mm wheels, 2 of which with brakes, fitted with plastic bumpers

### Construction

- Constructed entirely in 304 AISI stainless steel.

**APPROVAL:** \_\_\_\_\_

**Key Information:**

|                              |             |
|------------------------------|-------------|
| External dimensions, Width:  |             |
| 361222 (STR123)              | 1295 mm     |
| External dimensions, Depth:  | 695 mm      |
| External dimensions, Height: | 816 mm      |
| Wheel material:              | Zinc plated |
| Wheel diameter:              | Ø 125       |
| Net weight:                  | 31 kg       |