

Service Trolleys Three Tier Service Trolley with Handle 900 mm

|--|

361206 (STR903WH)

3-tier Service Trolley with handle 900mm

Short Form Specification

Item No.

Constructed in 304 AISI stainless steel. Framework in mm25 tubing, completely welded. Seamless, sound-absorbing, shelves with double-folded edges. Shelves are welded to the framework. The handles are an extension of the load-bearing frame. N. 4 swivelling castors, two with brakes, mm125 in diameter, fitted with plastic bumpers. Shelves size mm900x600. Load capacity: 100 kg, uniformly distributed.

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

Main Features

- Framework in 25 mm tubing, completely welded.
- Load capacity of 100 kg uniformly distributed.
- Seamless sound-absorbing shelves with double-folded edges welded to the framework.
- Shelves size 900x600 mm.
- Strong, ergonomic handle is an extension of the load-bearing frame.
- 4 pivoting Ø 125 mm wheels, 2 of which with brakes, fitted with plastic bumpers


Construction

• Constructed entirely in 304 AISI stainless steel.

APPROVAL:



Service Trolleys Three Tier Service Trolley with Handle 900 mm

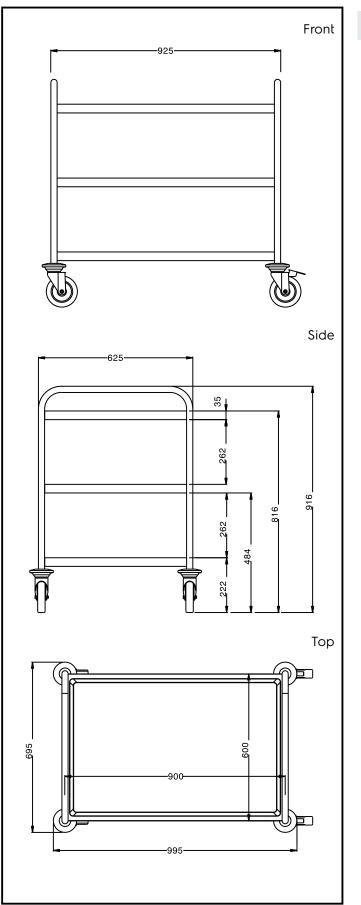

Key Information:

External dimensions, Width:	
361206 (STR903WH)	995 mm
External dimensions, Depth:	695 mm
External dimensions, Height:	916 mm
Wheel material:	Zinc plated
Wheel diameter:	Ø 125
Net weight:	30 kg

Service Trolleys Three Tier Service Trolley with Handle 900 mm

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.