

Vegetable Washer Tilting Basket Vegetable Washer 14/70kg



| ITEM #  |  |      |
|---------|--|------|
| MODEL # |  |      |
| NAME #  |  |      |
| SIS #   |  |      |
| AIA #   |  | <br> |
|         |  |      |

# Main Features

- Double inclined well bottom to allow automatic cleaning of the unit.
- Washing well shaped to achieve an efficient water vortex.
- Basket lifting at the end of the cycle achieved by means of a linear motor controlled by a double push button with alarm.
- "Soft-action" manual ball valve regulates the wash water loading and pressure.
- Multiple diffuser to uniform water vortex and a solenoid valve to expedite water loading and drainage.
- Simple control panel with emergency stop an acoustic alarm switch.
- Cycle duration of 2 to 3 minutes.
- Mounted on adjustable stainless steel legs.
- IP25 protection against water jets, solid objects and small animals (larger than 6 mm).

## Construction


- 304 AISI stainless steel construction throughout.
- Wells to have a capacity of 14 kg of light vegetables or 70 kg of heavy vegetables per cycle.

### APPROVAL:

# **Electrolux PROFESSIONAL**

# Vegetable Washer Tilting Basket Vegetable Washer 14/70kg

1.6 kW

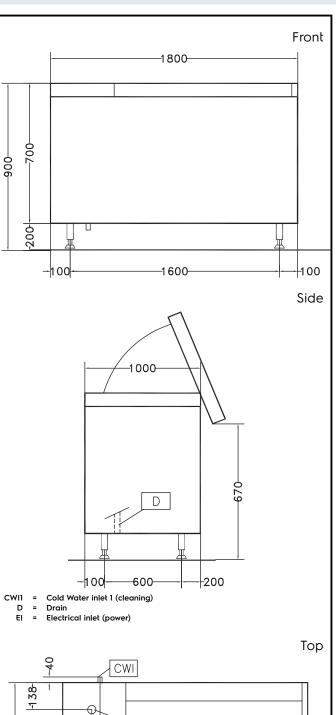

D

Intertek

650

EI

70--295--466-

# Electric

Total Watts:

# Key Information:

| External dimensions, Width:           | 1800 mm |
|---------------------------------------|---------|
| External dimensions, Depth:           | 1000 mm |
| External dimensions, Height:          | 850 mm  |
| Shipping weight:                      | 296 kg  |
| Usable well capacity:                 | 500 It  |
| Load per cycle - light<br>vegetables: | 14 kg   |
| Load per cycle - heavy<br>vegetables: | 70 kg   |



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.