

Turbo Liquidizers

Turbo Liquidiser for Soups - 2 Speed with micro liquidiser

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


602067 (TBM150001)

 Stainless steel Turbo
 Liquidiser 2 speeds (for
 soup) with micro
 Liquidiser

Short Form Specification

Item No. _____

For mixing, liquidising, reducing and emulsifying. Constructed entirely in 18/8 stainless steel. Mounted on a mobile stainless steel trolley. Can be adapted to all recipient shapes: cylindrical, rectangular, etc. No volt release system. Safety device in non-working position and protective ring for the grinding head. 2 speeds motor: 830 and 1660 rpm. Stainless steel micro liquidiser for fish soup available as an option. Supplied with stainless steel micro liquidiser for kitchen use.

Main Features

- Used to mix, blend and emulsify vegetable and soups, fruit and vegetable purées, liquid pastries, sauces and much more directly in cooking pots/containers.
- Liquidiser is mounted on a mobile stainless steel trolley and is height adjustable on installation.
- Turbine accelerates the flow of the liquid over the impeller providing a greater throughput and finer grinding.
- Safety device allows the machine to start only when it is in a working position.
- Equipped with protective ring to cover grinding head.
- Suggested for deep and low pans containing between 500 and 1000 liter of liquid.

Construction

- Constructed entirely in stainless steel to offer maximum durability.
- 2 speeds: 830 and 1660 rpm.
- Power: 4500 W.
- IP55 electrical controls and IP34 overall machine.

Included Accessories

- 1 of Stainless steel micro liquidiser for TBM150 (kitchen) PNC 653243

Optional Accessories


- Stainless steel micro liquidiser PNC 650043 ☐ for TBM150 (fish soup)
- Stainless steel micro liquidiser PNC 653243 ☐ for TBM150 (kitchen)

APPROVAL: _____


Turbo Liquidizers

Turbo Liquidiser for Soups - 2 Speed with micro liquidiser

Front




Side

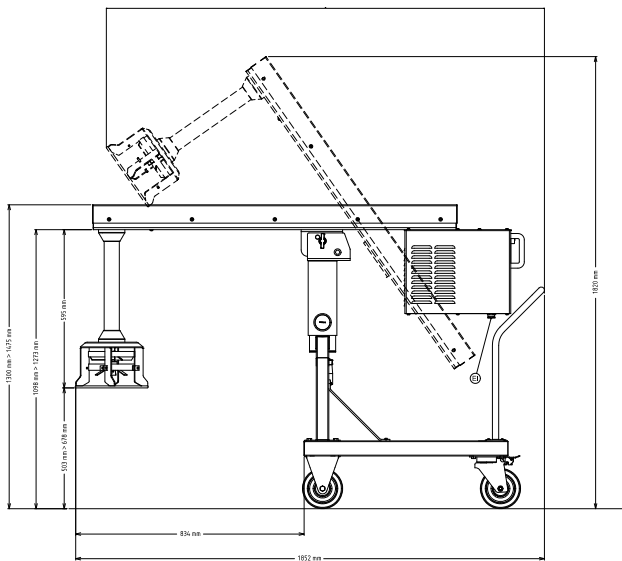

EI = Electrical inlet (power)

Top

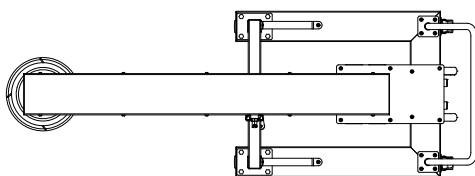

Electric

| | |
|------------------------|----------------------|
| Supply voltage: | 380-415 V/3 ph/50 Hz |
| Electrical power, max: | 4.5 kW |
| Total Watts: | 4.5 kW |

Key Information:

| | |
|------------------------------|---------|
| External dimensions, Width: | 663 mm |
| External dimensions, Depth: | 1852 mm |
| External dimensions, Height: | 1475 mm |
| Shipping weight: | 183 kg |