



Service Trolleys Two Tier Service Trolley 600 mm

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



361212 (STR602)

2-tier Service Trolley 600mm

Short Form Specification

Item No.

Constructed in 304 AISI stainless steel. Framework in mm25 tubing, completely welded. Seamless, sound-absorbing, shelves with double-folded edges. Shelves are welded to the framework. N. 4 swivelling castors, two with brakes, mm125 in diameter, fitted with plastic bumpers. Shelves size mm600x600. Load capacity: 100 kg, uniformly distributed.

Main Features

- Framework in 25 mm tubing, completely welded.
- Load capacity of 100 kg uniformly distributed.
- Seamless sound-absorbing shelves with double-folded edges welded to the framework.
- Shelves size 600x600 mm.
- 4 pivoting Ø 125 mm wheels, 2 of which with brakes, fitted with plastic bumpers

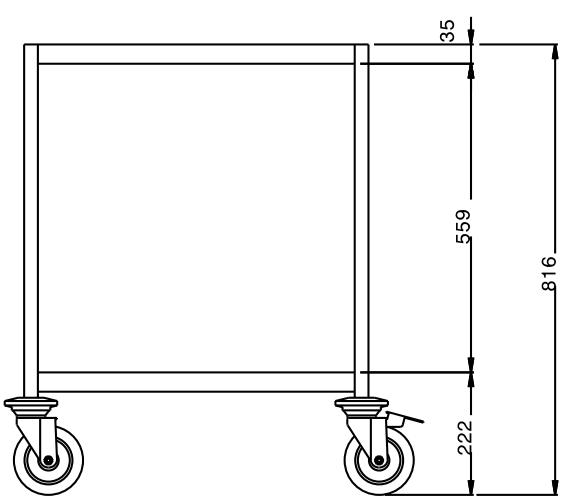
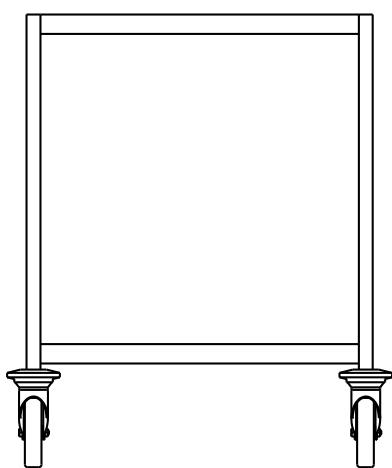
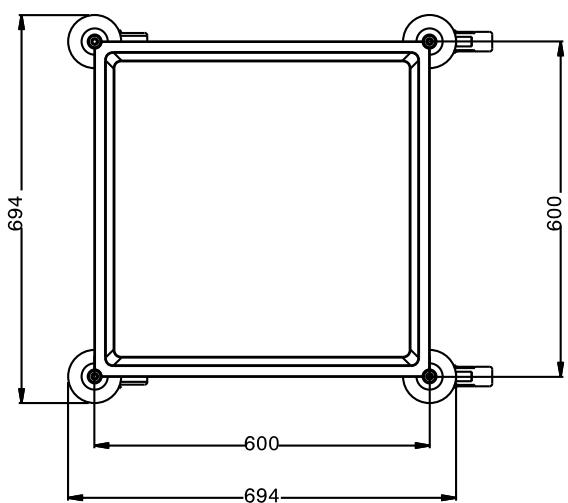
Construction

- Constructed entirely in 304 AISI stainless steel.

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com


Side

Top

Key Information:

External dimensions, Width:	695 mm
361212 (STR602)	695 mm
External dimensions, Depth:	816 mm
External dimensions, Height:	Zinc plated
Wheel material:	Ø 125
Wheel diameter:	21 kg
Net weight:	