

Service Trolleys Two Tier Service Trolley 900 mm

| ITEM # | | |
|---------|--|---|
| MODEL # | | |
| NAME # | | |
| SIS # | | |
| ΔIA # | | _ |



361216 (STR902)

2-tier Service Trolley 900mm

Short Form Specification

Item No.

Constructed in 304 AISI stainless steel. Framework in mm25 tubing, completely welded. Seamless, sound-absorbing, shelves with double-folded edges. Shelves are welded to the framework. N. 4 swivelling castors, two with brakes, mm125 in diameter, fitted with plastic bumpers. Shelves size mm900x600. Load capacity: 100 kg, uniformly distributed.

Main Features

- Framework in 25 mm tubing, completely welded.
- Load capacity of 100 kg uniformly distributed.
- Seamless sound-absorbing shelves with double-folded edges welded to the framework.
- Shelves size 900x600 mm.
- 4 pivoting Ø 125 mm wheels, 2 of which with brakes, fitted with plastic bumpers

Construction


• Constructed entirely in 304 AISI stainless steel.

APPROVAL:





Service Trolleys Two Tier Service Trolley 900 mm

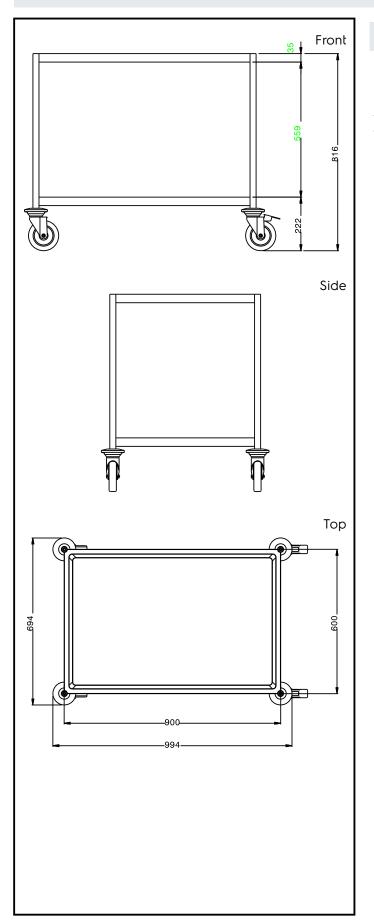

Key Information:

External dimensions, Width:

361216 (STR902)995 mmExternal dimensions, Depth:695 mmExternal dimensions, Height:816 mmWheel material:Zinc platedWheel diameter:Ø 125Net weight:21 kg

Service Trolleys Two Tier Service Trolley 900 mm