

# Warewashing Utensil Dishwasher with Drain Pump and Wash Safe Control

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	



503024 (WTU40ADP)

Utensil Dishwasher WTU40, 65b/h, with drain pump and atmospheric boiler, 1180 p/h

# **Short Form Specification**

# Item No.

Multi-purpose dish/utensil washer. 304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms. 42 liter wash tank with rounded corners. Double skinned insulated walls and counterbalanced door with double stop. 450mm door clearance. 3 washing cycles. Self cleaning cycle. Digital control panel with display of wash and rinse temperatures. Builtin atmospheric, insulated water boiler (9 kW), 12-liter capacity, combined with rinse booster pump guarantee a constant hot rinse temperature of 84°C. Boiler with 304L welding for protection against corrosion. Wash Safe Control assures the correct water temperature and pressure during the rinse phase to guarantee a perfect rinsing performance independent from the water pressure in the network (min. 0,5 bar). Drain pump. Fault auto-diagnosis system. Rinse aid dispenser. Pre-arranged for external detergent dispenser, HACCP and Energy management device.

Hourly capacity: 1170 dishes/65 baskets 500x530mm.

Supplied with: n.1 basket for plates, n.1 wire basket for pizza plates,trays,and small utensils and n.2 cutlery containers.

### **Main Features**

- Built-in atmospheric boiler sized to raise incoming 50 °C water to 84 °C minimum for sanitizing rinse. No external booster is required.
- Constant temperature of 84 °C thoughout the rinsing cycle regardless of the network's water pressure and temperature.
- High efficiency air gap (class A) in water inlet circuit to avoid water being siphoned back into the network as a result of a sudden drop in main pressures.
- Green light of "WASH SAFE CONTROL" confirms that items have been rinsed properly.
- Double rack support equipped with either a large 550x535mm rack for pizza plates, trays and utensils or a standard 500x500mm rack for plates, cups and cutlery.
- Equipped with drain pump for easy and quick installation without opening the machine.
- Fault auto-diagnosis system.
- · Simple service from the front.
- Easy to remove wash/rinse arms and filter.
- Fully automatic self-cleaning cycle avoids the risk of bacteria proliferation.
- Simple control panel, with digital display for wash and rinse temperature.
- Automatic boiler emptying function.
- 55/90/300 seconds cycles.
- Low noise level <65 dBA.

### Construction

- Counter-balanced door to minimize impact when opening and closing.
- Unit to feature rinse aid dispenser pump.
- Unit to feature smooth surfaces to facilitate cleaning.
- Wash/rinse arms and nozzles in stainless steel.
- 304 AISI stainless steel front and side panels, wash tank and filter.
- Double skinned construction.
- Completely closed on the back by a cover plate.
- Double wash tank with rounded corners for easier cleaning operations.
- No pipes inside the washing chamber.

## Sustainability



- Finished in top quality materials to ensure durability.
- Pre-arrangement for HACCP system implementation and Energy Management device.

## APPROVAL:





# Warewashing Utensil Dishwasher with Drain Pump and Wash Safe Control

# **Included Accessories**

<ul> <li>2 of Yellow cutlery container</li> </ul>	PNC 864242
• 1 of Basket for 18 dinner plates -	PNC 867002
vellow	


• 1 of Wire basket for pizza plates, up PNC 867045 to 320mm diam. trays, utensils

PNC 860412	
PNC 864017	
PNC 864050	
PNC 864218	
PNC 864242	
PNC 864367	
PNC 864388	
PNC 864479	
PNC 865574	
PNC 867000	
PNC 867002	
PNC 867016	
PNC 867023	
PNC 867024	
PNC 867045	
PNC 867046	
PNC 922768	
	PNC 864017 PNC 864050 PNC 864218 PNC 864242 PNC 864367 PNC 864388 PNC 864379 PNC 865574 PNC 867000 PNC 867002 PNC 867016 PNC 867023 PNC 867024 PNC 867045 PNC 867045





# Warewashing Utensil Dishwasher with Drain Pump and Wash Safe Control

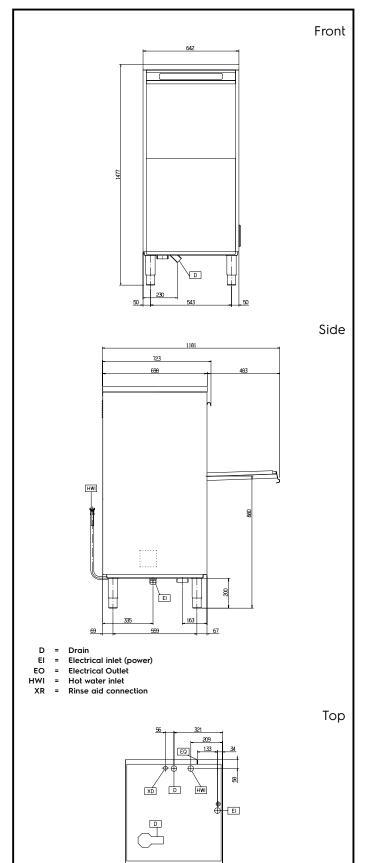

# **Electric**

Supply voltage: 400 V/3N ph/50 Hz

**Total Watts:** 12.1 kW 0.8 kW Wash pump power:

### Water:

Washing cycle electrical elements:

3 kW

Hot rinse cycle duration

16

(sec.):

Min hot rinse water consumption (lt/cycle)\*\*:

3.8 50 °C

Water supply temperature\*: Washing tank capacity (It): 42 Boiler Capacity (It): 12

# **Key Information:**

Washing cycle temperature: 55-65 °C Hot rinse cycle temperature: 84 °C

55/90/300 / / / / Working cycles time (sec.):

Cell dimensions - width: 554 mm Cell dimensions - depth: 570 mm Cell dimensions - height: 450 mm External dimensions, Width: 642 mm External dimensions, Depth: 723 mm External dimensions, Height: 1477 mm Net weight: 97 kg Shipping weight: 103 kg 1700 mm Shipping height: Shipping width: 810 mm Shipping depth: 760 mm Shipping volume: 1.05 m<sup>3</sup> Dishes capacity: 1170/hr Basket capacity: 65/h



