



Warewashing Utensil Dishwasher with Drain Pump and Wash Safe Control



503024 (WTU40ADP)

Utensil Dishwasher WTU40,
65b/h, with drain pump and
atmospheric boiler, 1180 p/h

Short Form Specification

Item No.

Multi-purpose dish/utensil washer. 304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms. 42 liter wash tank with rounded corners. Double skinned insulated walls and counterbalanced door with double stop. 450mm door clearance. 3 washing cycles. Self cleaning cycle. Digital control panel with display of wash and rinse temperatures. Built-in atmospheric, insulated water boiler (9 kW), 12-liter capacity, combined with rinse booster pump guarantees a constant hot rinse temperature of 84°C. Boiler with 304L welding for protection against corrosion. Wash Safe Control assures the correct water temperature and pressure during the rinse phase to guarantee a perfect rinsing performance independent from the water pressure in the network (min. 0.5 bar). Drain pump. Fault auto-diagnosis system. Rinse aid dispenser. Pre-arranged for external detergent dispenser, HACCP and Energy management device.

Hourly capacity: 1170 dishes/65 baskets 500x530mm.

Supplied with: n.1 basket for plates, n.1 wire basket for pizza plates,trays, and small utensils and n.2 cutlery containers.

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____

Main Features

- Built-in atmospheric boiler sized to raise incoming 50 °C water to 84 °C minimum for sanitizing rinse. No external booster is required.
- Constant temperature of 84 °C throughout the rinsing cycle regardless of the network's water pressure and temperature.
- High efficiency air gap (class A) in water inlet circuit to avoid water being siphoned back into the network as a result of a sudden drop in main pressures.
- Green light of "WASH SAFE CONTROL" confirms that items have been rinsed properly.
- Double rack support equipped with either a large 550x535mm rack for pizza plates, trays and utensils or a standard 500x500mm rack for plates, cups and cutlery.
- Equipped with drain pump for easy and quick installation without opening the machine.
- Fault auto-diagnosis system.
- Simple service from the front.
- Easy to remove wash/rinse arms and filter.
- Fully automatic self-cleaning cycle avoids the risk of bacteria proliferation.
- Simple control panel, with digital display for wash and rinse temperature.
- Automatic boiler emptying function.
- 55/90/300 seconds cycles.
- Low noise level <65 dBA.

Construction

- Counter-balanced door to minimize impact when opening and closing.
- Unit to feature rinse aid dispenser pump.
- Unit to feature smooth surfaces to facilitate cleaning.
- Wash/rinse arms and nozzles in stainless steel.
- 304 AISI stainless steel front and side panels, wash tank and filter.
- Double skinned construction.
- Completely closed on the back by a cover plate.
- Double wash tank with rounded corners for easier cleaning operations.
- No pipes inside the washing chamber.

Sustainability

- Finished in top quality materials to ensure durability.
- Pre-arrangement for HACCP system implementation and Energy Management device.



APPROVAL:



Experience the Excellence
www.electroluxprofessional.com


Included Accessories

- 2 of Yellow cutlery container PNC 864242
- 1 of Basket for 18 dinner plates - yellow PNC 867002
- 1 of Wire basket for pizza plates, up to 320mm diam. trays, utensils PNC 867045


Optional Accessories

- 12lt external manual water softener PNC 860412
- Filter for partial demineralization PNC 864017
- Kit to measure total and partial water hardness PNC 864050
- Detergent dosing kit PNC 864218
- Yellow cutlery container PNC 864242
- Filter for total demineralization PNC 864367
- External reverse osmosis filter for single tank Dishwashers with atmosphere boiler and Ovens PNC 864388
- Connectivity kit for Undercounter Dishwashers and Pot Washers (ECAP) PNC 864479
- Kit 4 plastic boxes for cutlery - yellow PNC 865574
- Basket for 12 soup bowls - green PNC 867000
- Basket for 18 dinner plates - yellow PNC 867002
- Cover rack for small and light items (500x500 baskets) PNC 867016
- Basket for 16 vertical glasses (h 70 mm - diam 100 mm) - blue PNC 867023
- Basket semi-professional 500x500x190mm PNC 867024
- Wire basket for pizza plates, up to 320mm diam. trays, utensils PNC 867045
- Wire basket (550x535mm) for utensils PNC 867046
- Ethernet connector for ECAP protocol appliances PNC 922768

Front

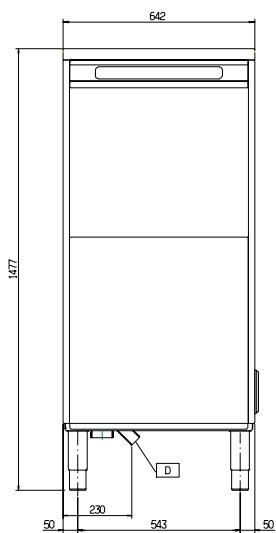


Side

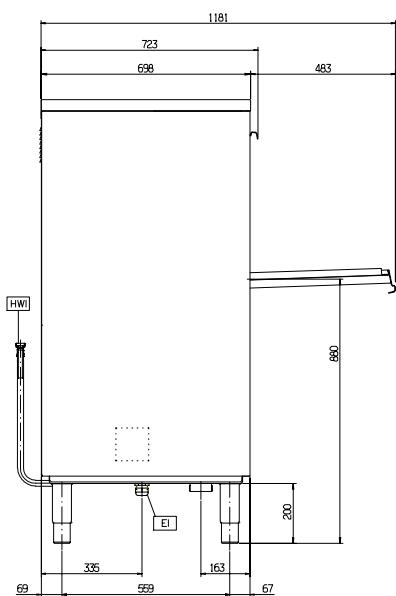

D = Drain
 EI = Electrical inlet (power)
 EO = Electrical Outlet
 HWI = Hot water inlet
 XR = Rinse aid connection

Top

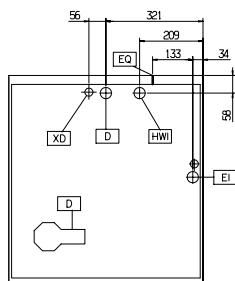
Electric

Supply voltage: 400 V/3N ph/50 Hz
Total Watts: 12.1 kW
Wash pump power: 0.8 kW

Water:

Washing cycle electrical elements: 3 kW
Hot rinse cycle duration (sec.): 16
Min hot rinse water consumption (l/t/cycle):** 3.8
Water supply temperature*: 50 °C
Washing tank capacity (l/t): 42
Boiler Capacity (l/t): 12

Key Information:

Washing cycle temperature: 55-65 °C
Hot rinse cycle temperature: 84 °C
Working cycles time (sec.): 55/90/300 / / /
Cell dimensions - width: 554 mm
Cell dimensions - depth: 570 mm
Cell dimensions - height: 450 mm
External dimensions, Width: 642 mm
External dimensions, Depth: 723 mm
External dimensions, Height: 1477 mm
Net weight: 97 kg
Shipping weight: 103 kg
Shipping height: 1700 mm
Shipping width: 810 mm
Shipping depth: 760 mm
Shipping volume: 1.05 m³
Dishes capacity: 1170/hr
Basket capacity: 65/h

Warewashing

Utensil Dishwasher with Drain Pump and Wash Safe Control

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.01.16