

Warewashing Utensil Dishwasher with Wash Safe Control, Drain Pump and Detergent Dispenser

ITEM #
MODEL #
NAME #
<u>SIS #</u>
AIA #



- •
- No pipes inside the washing chamber.

Sustainability

- Pre-arrangement for HACCP system implementation and Energy Management device.
- Finished in top quality materials to ensure durability.

APPROVAL:

of wash and rinse temperatures. Built-in atmospheric, insulated water boiler (9 kW), 12-liter capacity, combined with rinse booster pump guarantee a constant hot rinse temperature of 84°C. Boiler with 304L welding for protection against corrosion. Wash Safe Control assures the correct water temperature and pressure during the rinse phase to guarantee a perfect rinsing performance independent from the water pressure in the network (min. 0,5 bar). Drain pump. Fault autodiagnosis system. Rinse aid dispenser, detergent dispenser, HACCP and Energy management device.

Hourly capacity: 1170 dishes/65 baskets 500x530mm.

Supplied with: n.1 basket for plates, n.1 wire basket for pizza plates, trays, and small utensils and n.2 cutlery containers.

- Built-in atmospheric boiler sized to raise incoming 50 °C water to 84 °C minimum for sanitizing rinse.
- Constant temperature of 84 °C thoughout the rinsing cycle regardless of the network's water
- High efficiency air gap (class A) in water inlet circuit to avoid water being siphoned back into the network as a result of a sudden drop in main
- Green light of "WASH SAFE CONTROL" confirms that items have been rinsed properly.
- Double rack support equipped with either a large 550x535mm rack for pizza plates, trays and utensils or a standard 500x500mm rack for plates, cups and
- Equipped with drain pump for easy and quick installation without opening the machine.
- Easy to remove wash/rinse arms and filter.
- Fully automatic self-cleaning cycle avoids the risk
- Detergent dispenser for easy connection to the
- Simple control panel, with digital display for wash
- Automatic boiler emptying function.
- Counter-balanced door to minimize impact when
- Unit to feature rinse aid dispenser pump.
- Unit to feature smooth surfaces to facilitate
- Wash/rinse arms and nozzles in stainless steel.
- 304 AISI stainless steel front and side panels, wash tank and filter.
- Double skinned construction.

• Completely closed on the back by a cover plate.

Double wash tank with rounded corners for easier cleaning operations.






Included Accessories

Included Accessories		
 2 of Yellow cutlery container 	PNC 864242	
 1 of Basket for 18 dinner plates - yellow 	PNC 867002	
• 1 of Wire basket for pizza plates, up to 320mm diam. trays, utensils	PNC 867045	
Optional Accessories		
• 12lt external manual water softener	PNC 860412	
 8lt external automatic water softener 	PNC 860413	
 Filter for partial demineralization 	PNC 864017	
 Kit to measure total and partial water hardness 	PNC 864050	
 Yellow cutlery container 	PNC 864242	
 Filter for total demineralization 	PNC 864367	
• External reverse osmosis filter for single tank Dishwashers with atmosphere boiler and Ovens	PNC 864388	
 Connectivity kit for Undercounter Dishwashers and Pot Washers (ECAP) 	PNC 864479	
• Kit 4 plastic boxes for cutlery - yellow	PNC 865574	
• Basket for 18 dinner plates - yellow	PNC 867002	
• Cover rack for small and light items (500x500 baskets)	PNC 867016	
 Basket for 16 vertical glasses (h 70 mm - diam 100 mm) - blue 	PNC 867023	
 Basket semi-professional 500x500x190mm 	PNC 867024	
• Wire basket for pizza plates, up to 320mm diam. trays, utensils	PNC 867045	
 Wire basket (550x535mm) for utensils 	PNC 867046	
 Ethernet connector for ECAP protocol appliances 	PNC 922768	



Electrolux PROFESSIONAL

Warewashing Utensil Dishwasher with Wash Safe Control, Drain Pump and Detergent Dispenser

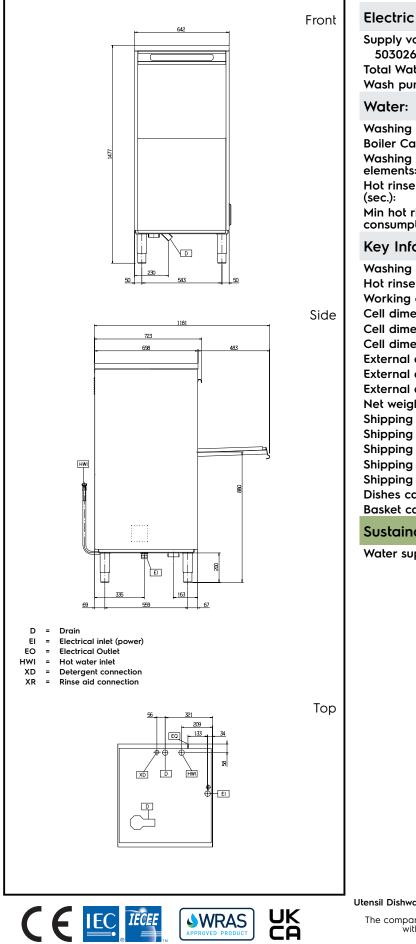

Electric	
Supply voltage: 503026 (WTU40ADPD) Total Watts: Wash pump power:	400 V/3N ph/50 Hz 12.1 kW 0.8 kW
Water:	
Washing tank capacity (It): Boiler Capacity (It):	42 12
Washing cycle electrical	-
elements: Hot rinse cycle duration	3 kW
(sec.):	16
Min hot rinse water consumption (lt/cycle)**:	3.8
Key Information:	
Washing cycle temperature:	55-65 °C
Hot rinse cycle temperature:	84 °C
Working cycles time (sec.):	55/90/300
Cell dimensions - width:	554 mm
Cell dimensions - depth:	570 mm
Cell dimensions - height:	450 mm
External dimensions, Width:	642 mm
External dimensions, Depth:	723 mm
External dimensions, Height:	1477 mm
Net weight:	97 kg
Shipping weight:	105 kg
Shipping height:	1700 mm
Shipping width:	760 mm
Shipping depth:	820 mm
Shipping volume:	1.06 m³
Dishes capacity:	1170/hr
Basket capacity:	65/h
Sustainability	

50 °C Water supply temperature*:

Warewashing Utensil Dishwasher with Wash Safe Control, Drain Pump and Detergent Dispenser The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.