

## Digital Undercounter ecostore HP Concept Refrigerated Counter - 3 Door without Top (R290)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**710461 (EK3H7AAA)**

 3-door Refrigerated  
Counter, -2+10°C, AISI 304  
(R290), without work top

### Short Form Specification

**Item No.** \_\_\_\_\_

AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. N. 3 full doors. Built-in refrigeration unit. Operating temperature: -2+10°C. R290 gas in refrigeration circuit. Supplied with 1 grid for each door compartment

### Main Features

- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Refrigerated compartment designed to accept GN 1/1 containers.
- Combination of doors and drawers to suit varying needs, with the possibility to change the configuration on site.
- Digital control panel.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Anti-tilt runners accept GN 1/1 containers.
- Self closing stainless steel doors (< 90°).
- Prearranged to fit RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- 0mm clearance installation space: tower configuration cooling unit guarantee performance with frontal ventilation only; this unique solution allows installation against the wall or side by side with other appliances, even on the cooling unit side to maximize the use of kitchen space.
- Preservation performances and temperature uniformity within the cell guaranteed at 5-HEAVY DUTY (40°C) working conditions according to EN16825:2016 test protocol.
- Combination of doors and drawers to suit any configuration needed, with the possibility to change the configuration on site. Right cooling unit available on request.
- Frontal and easy access to all components in the cooling unit.
- Certified safety CE requirements.
- Equipped with forced air circulation system for rapid cooling and temperature distribution within the cell.
- Digital white-digit display with internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).
- Tropicalized unit.

### Construction

- Built-in compressor to suit operating conditions.
- Constructed from AISI 304 Stainless steel throughout to meet the highest hygiene standards.
- Rounded internal corners for ease of cleaning.
- Mounted on Stainless steel adjustable legs to give 150 mm clearance for ease of cleaning.
- Access to all components from the front.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Pre-arranged for drain-pipe.
- Fault code display.
- Interior base with rounded corners, pressed from a single sheet.
- Built-in refrigeration unit.
- 3 compartments with 3 doors.
- Mounted on stainless steel feet to give 150 mm (-5/+50 mm) clearance for ease of cleaning the floor.

**APPROVAL:** \_\_\_\_\_

- External bottom panel in stainless steel.
- External back panel in galvanized steel.
- Ease of cleaning and high hygiene standards thanks to the rounded internal corners, the easily removable runners, grids and air conveyors.
- Internal structure with 15 charging positions (3 cm pitch) available to host GN 1/1 grids, ensuring higher net capacity and a greater storage space.
- Excellent space optimisation thanks to the compact dimensions.
- Extractable cooling unit to facilitate maintenance.

## Sustainability



- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.
- Hot gas automatic evaporation of defrost water.
- Top energy efficiency (class A) and granted uniformity even at extreme working conditions (class 5; 40°C and 40% humidity): unbeatable performance, certified by energy test protocol EN16825:2016.
- Fitted with 90 mm thickness of cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m\*K) and lowest environmental impact (GWP=3).


## Included Accessories

- 3 of Kit 1/1 grey rilsan grid and 2 side runners for refrigerated counters PNC 881109


## Optional Accessories

- |                                                                                                                  |            |                          |
|------------------------------------------------------------------------------------------------------------------|------------|--------------------------|
| • 2x½ drawer kit for refrigerated counters                                                                       | PNC 881058 | <input type="checkbox"/> |
| • 3x1/3 drawer kit for refrigerated counters                                                                     | PNC 881059 | <input type="checkbox"/> |
| • 1/3 and 2/3 bottle drawer kit for refrigerated counters                                                        | PNC 881071 | <input type="checkbox"/> |
| • 1/1GN grey rilsan grid for refrigerated counters                                                               | PNC 881107 | <input type="checkbox"/> |
| • 2 side runners for 1/1 GN ecostore refrigerated counters                                                       | PNC 881108 | <input type="checkbox"/> |
| • Kit 1/1 grey rilsan grid and 2 side runners for refrigerated counters                                          | PNC 881109 | <input type="checkbox"/> |
| • 1/1 GN plastic container, H=65 mm                                                                              | PNC 881110 | <input type="checkbox"/> |
| • 1/1 GN plastic container, H=100 mm                                                                             | PNC 881111 | <input type="checkbox"/> |
| • 1/1 GN plastic container, H=150 mm                                                                             | PNC 881112 | <input type="checkbox"/> |
| • Worktop for refrigerated counter, 3 compartments                                                               | PNC 881125 | <input type="checkbox"/> |
| • Worktop with upstand for refrigerated counter, 3 compartments                                                  | PNC 881128 | <input type="checkbox"/> |
| • Kit 4 wheels, H=100 mm (2 with brakes) for refrigerated counters                                               | PNC 881191 | <input type="checkbox"/> |
| • Kit 4 wheels, H=150 mm (2 with brakes) for 2&3 compartment refrigerated counters                               | PNC 881193 | <input type="checkbox"/> |
| • Lock for refrigerator/freezer counters with 3 compartments - h700mm (can be used in kit for Marine conversion) | PNC 881243 | <input type="checkbox"/> |
| • IoT module for refrigerated cabinets and counters                                                              | PNC 881298 | <input type="checkbox"/> |

Front

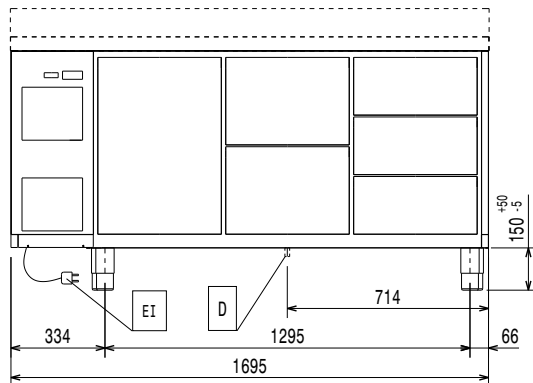


Side

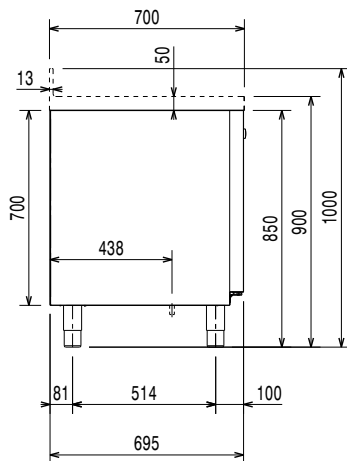

EI = Electrical inlet (power)

Top

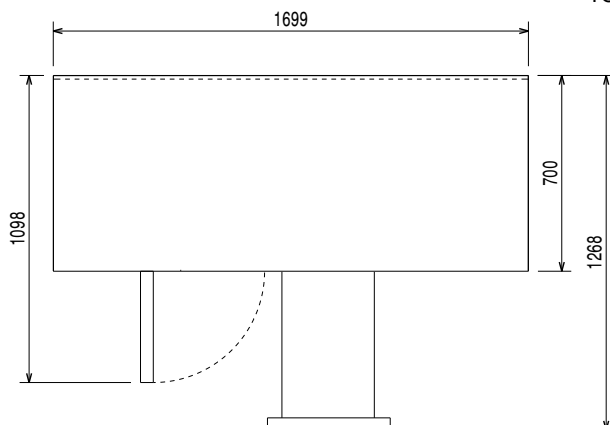

## Electric

|                        |                      |
|------------------------|----------------------|
| Supply voltage:        | 220-240 V/1 ph/50 Hz |
| Electrical power, max: | 0.22 kW              |
| Defrost Power:         | 0.2 kW               |
| Plug type:             | CE-SCHUKO            |

## Key Information:

|                              |                     |
|------------------------------|---------------------|
| Net Volume:                  | 271.2 lt            |
| External dimensions, Width:  | 1695 mm             |
| External dimensions, Depth:  | 700 mm              |
| External dimensions, Height: | 850 mm              |
| Internal Dimensions, Width:  | 1252 mm             |
| Internal Dimensions, Depth:  | 560 mm              |
| Internal Dimensions, Height: | 550 mm              |
| Net weight:                  | 95 kg               |
| Shipping volume:             | 1.38 m <sup>3</sup> |
| Depth with doors open:       | 1110 mm             |
| Height adjustment:           | -5/50 mm            |
| Gross capacity:              | 440 lt              |

## Refrigeration Data

|                                                 |                      |
|-------------------------------------------------|----------------------|
| Control type:                                   | Digital              |
| Refrigeration power at evaporation temperature: | -10 °C               |
| Min/Max internal humidity:                      | 40/85                |
| Operating temperature min.:                     | -2 °C                |
| Operating temperature max.:                     | 10 °C                |
| Compressor power:                               | 0.25 hp              |
| Operating mode:                                 | Ventilated           |
| Insulation:                                     | 90 mm (Cyclopentane) |

## ISO Certificates

|                |                                           |
|----------------|-------------------------------------------|
| ISO Standards: | ISO 9001; ISO 14001; ISO 45001; ISO 50001 |
|----------------|-------------------------------------------|

## Sustainability

|                                                          |                        |
|----------------------------------------------------------|------------------------|
| Current consumption:                                     | 1.6 Amps               |
| Refrigerant type:                                        | R290                   |
| GWP Index:                                               | 3                      |
| Refrigeration power:                                     | 358 W                  |
| Refrigerant weight (unit 1):                             | 65 g                   |
| Energy Class (EU Reg. 2015/1094):                        | A                      |
| Yearly and daily energy consumption (EU Reg. 2015/1094): | 610kWh/year - 2kWh/24h |
| Climate class (EU Reg. 2015/1094):                       | Heavy Duty (5)         |
| Energy Efficiency Index-EEI (EU Reg. 2015/1094):         | 24,57                  |



**Electrolux**  
PROFESSIONAL

## Digital Undercounter ecostore HP Concept Refrigerated Counter - 3 Door without Top (R290)



### EU energy labelling from 1st July 2016

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU.

These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

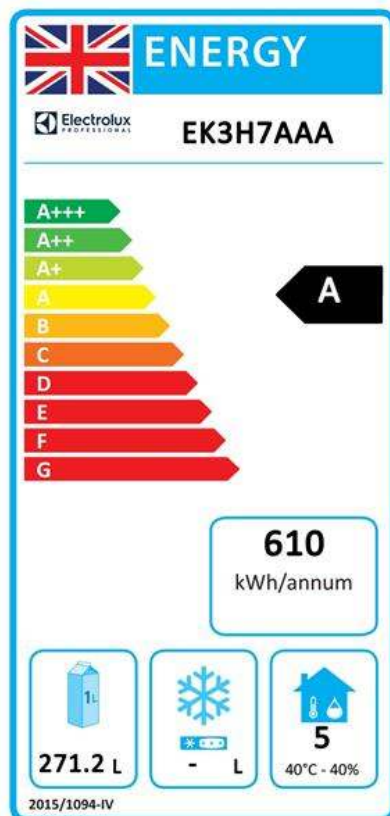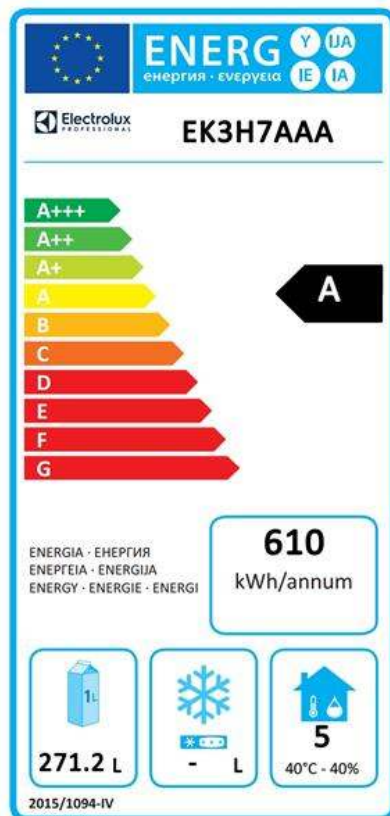

Digital Undercounter  
ecostore HP Concept Refrigerated Counter - 3 Door without Top (R290)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2026.01.01