

Digital Undercounter ecostore HP Refrigerated Counter - 2 Door (R134a) with top - Remote

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



710430 (AJ2RRAA)

2-door Refrigerated
Counter, -2+10°C, AISI 304,
remote

Short Form Specification

Item No.

AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. Worktop thickness 50mm. N. 2 full doors. For connection to a remote refrigeration unit (not included). Operating temperature: -2+10°C. R134a gas in refrigeration circuit. Supplied with 1 grid for each door compartment

Main Features

- Kit 1/3 drawers available as accessory.
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Complies with main international certification bodies and is CE marked.
- Kit 1/2 drawers available as accessory.
- Forced air cooling system guaranteeing great uniformity of the temperature in the counter and excellent conservation of the food quality.
- Completely automatic defrosting.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Easy serviceability thanks to the intuitive control panel with access via app.
- Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.

Construction

- Remote refrigeration unit.
- CFC and HCFC free.
- Legs in 304 AISI stainless steel (150 mm high, adjustable in height), with plastic interior.
- Internal and external doors, front and side panels and 50mm thick removable worktop in 304 AISI stainless steel.
- Back panel in galvanized steel.
- The door self-closes when opened less than at a 90° angle and is equipped with a door seal to guarantee perfect closure.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids.

Included Accessories

- 2 of Kit 1/1 grey rilsan grid and 2 side runners for refrigerated counters PNC 881109


Optional Accessories

- Automatic defrost with waste evaporation PNC 880028 ☐
- Remote unit for refrigerators and refrigerated counters, -2+10°C, R134a PNC 880231 ☐
- 1/1GN grey rilsan grid for refrigerated counters PNC 881107 ☐
- 2 side runners for 1/1 GN ecostore refrigerated counters PNC 881108 ☐
- Kit 1/1 grey rilsan grid and 2 side runners for refrigerated counters PNC 881109 ☐
- 1/1 GN plastic container, H=65 mm PNC 881110 ☐
- 1/1 GN plastic container, H=100 mm PNC 881111 ☐


APPROVAL: _____

- 2x½ drawer kit for refrigerated counters - h650mm PNC 881176 ☐
- 3x1/3 drawer kit for refrigerated counters - h650mm (only for refrigerated counters) PNC 881177 ☐
- 1/3 and 2/3 bottle drawer kit for refrigerated counters - h650mm (only for refrigerated counters) PNC 881178 ☐
- Lock for refrigerator/freezer counters with 2 compartments - h650mm (can be used in kit for Marine conversion) PNC 881245 ☐

Front

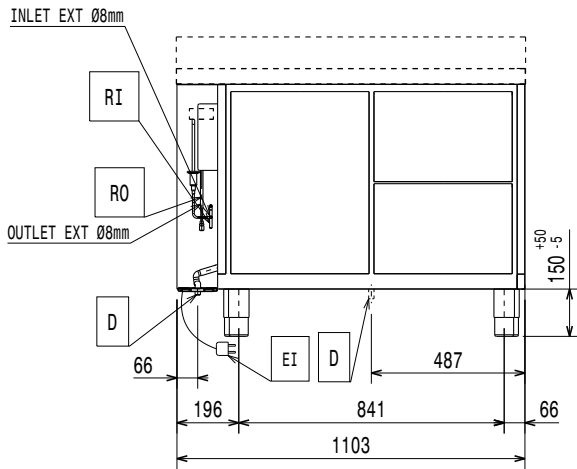


Side

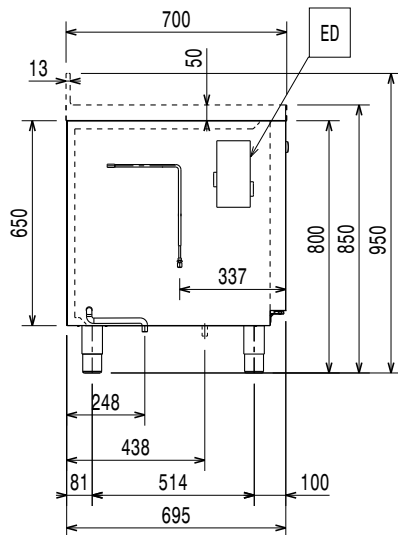

EI = Electrical inlet (power)

Top

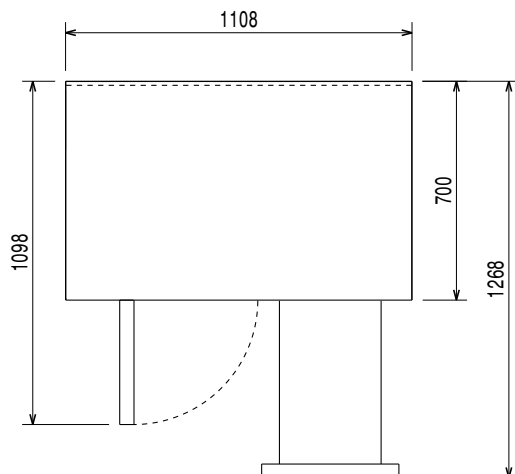

Electric

Supply voltage:

710430 (AJ2RRAA)

220-240 V/1 ph/50/60 Hz

Electrical power max.:

0.03 kW

Key Information:

Gross capacity:

Net Volume:

160 lt

N° of doors:

External dimensions, Width:

1103 mm

External dimensions, Depth:

700 mm

External dimensions, Height:

850 mm

Internal Dimensions, Width:

798 mm

Internal Dimensions, Depth:

560 mm

Internal Dimensions, Height:

510 mm

Net weight:

85 kg

Shipping volume:

0.97 m³

Depth with doors open:

1310 mm

Refrigeration Data

Control type:

Digital

Compressor power:

Min/Max internal humidity:

40/85

Operating temperature min.:

-2 °C

Operating temperature max.:

10 °C

Refrigeration type:

R134a;R513A;R426A

Operating mode:

Ventilated

Suggested refrigeration power:

368 W

Condition at evaporation temperature:

-10 °C

Condition at condensation temperature:

55 °C

Condition at ambient temperature:

32 °C

Connection pipes (remote) - outlet:

9.5 mm

Connection pipes (remote) - inlet:

8 mm

ISO Certificates

ISO Standards:

ISO 9001; ISO 14001; ISO 45001; ISO 50001

Sustainability

Energy Class (EU Reg. 2015/1094):

Yearly and daily energy consumption (EU Reg. 2015/1094):

Climate class (EU Reg. 2015/1094):

Energy Efficiency Index-EEI (EU Reg. 2015/1094):

GWP Index:

Refrigeration power:

0 W

Refrigerant weight:

0 g