

Digital Undercounter ecostore HP Refrigerated Counter - 2 Door (R134a) with top - Remote

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



710430 (AJ2RRAA)

 2-door Refrigerated
Counter, -2+10°C, AISI 304,
remote

Short Form Specification

Item No. _____

AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. Worktop thickness 50mm. N. 2 full doors. For connection to a remote refrigeration unit (not included). Operating temperature: -2+10°C. R134a gas in refrigeration circuit. Supplied with 1 grid for each door compartment

Main Features

- Kit 1/3 drawers available as accessory.
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Complies with main international certification bodies and is CE marked.
- Kit 1/2 drawers available as accessory.
- Forced air cooling system guaranteeing great uniformity of the temperature in the counter and excellent conservation of the food quality.
- Completely automatic defrosting.
- Tropicalized unit.

Construction

- Remote refrigeration unit.
- Legs in 304 AISI stainless steel (150 mm high, adjustable in height), with plastic interior.
- Internal and external doors, front and side panels and 50mm thick removable worktop in 304 AISI stainless steel.
- Back panel in galvanized steel.
- The door self-closes when opened less than at a 90° angle and is equipped with a door seal to guarantee perfect closure.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids.

User Interface & Data Management

- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Easy serviceability thanks to the intuitive control panel with access via app.
- Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.

Included Accessories

- 2 of Kit 1/1 grey rilsan grid and 2 PNC 881109 side runners for refrigerated counters

Optional Accessories

- Automatic defrost with waste evaporation PNC 880028 ☐
- Remote unit for refrigerators and refrigerated counters, -2+10°C, R134a PNC 880231 ☐
- 1/1GN grey rilsan grid for refrigerated counters PNC 881107 ☐
- 2 side runners for 1/1 GN ecostore refrigerated counters PNC 881108 ☐
- Kit 1/1 grey rilsan grid and 2 side runners for refrigerated counters PNC 881109 ☐
- 1/1 GN plastic container, H=65 mm PNC 881110 ☐

APPROVAL: _____



Electrolux
PROFESSIONAL

**Digital Undercounter
ecostore HP Refrigerated Counter -
2 Door (R134a) with top - Remote**

- | | | |
|--|------------|--------------------------|
| • 1/1 GN plastic container, H=100 mm | PNC 881111 | ☐ |
| • 2x½ drawer kit for refrigerated counters - h650mm | PNC 881176 | ☐ |
| • 3x1/3 drawer kit for refrigerated counters - h650mm (only for refrigerated counters) | PNC 881177 | ☐ |
| • 1/3 and 2/3 bottle drawer kit for refrigerated counters - h650mm (only for refrigerated counters) | PNC 881178 | ☐ |
| • Lock for refrigerator/freezer counters with 2 compartments - h650mm (can be used in kit for Marine conversion) | PNC 881245 | ☐ |




**Digital Undercounter
ecostore HP Refrigerated Counter - 2 Door (R134a) with top - Remote**


The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.10.21

Front

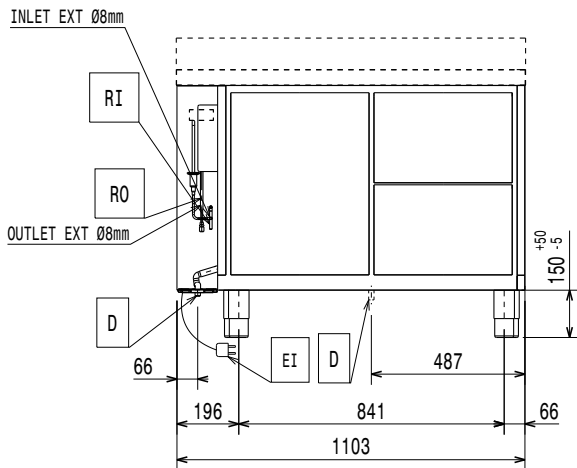


Side

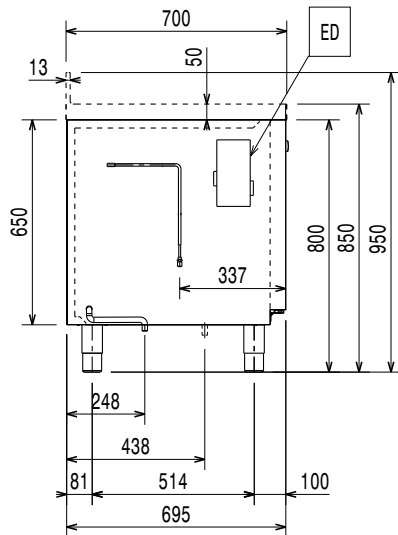

EI = Electrical inlet (power)

Top

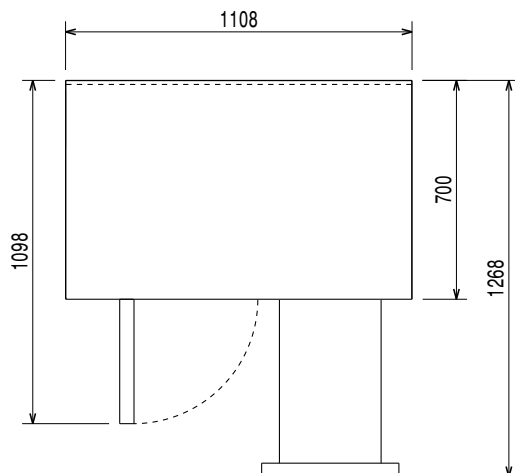

Electric

Supply voltage:	220-240 V/1 ph/50/60 Hz
Electrical power, max:	0.03 kW

Key Information:

Net Volume:	160 lt
N° of doors:	
External dimensions, Width:	1103 mm
External dimensions, Depth:	700 mm
External dimensions, Height:	850 mm
Internal Dimensions, Width:	798 mm
Internal Dimensions, Depth:	560 mm
Internal Dimensions, Height:	510 mm
Net weight:	85 kg
Shipping volume:	0.97 m³
Depth with doors open:	1310 mm
Gross capacity:	

Refrigeration Data

Control type:	Digital
Min/Max internal humidity:	40/85
Operating temperature min.:	-2 °C
Operating temperature max.:	10 °C
Compressor power:	
Refrigeration type:	R134a;R513A;R426A
Operating mode:	Ventilated
Insulation:	90 mm (Cyclopentane)
Suggested refrigeration power:	368 W
Condition at evaporation temperature:	-10 °C
Condition at condensation temperature:	55 °C
Condition at ambient temperature:	32 °C
Connection pipes (remote) - outlet:	9.5 mm
Connection pipes (remote) - inlet:	8 mm

ISO Certificates

ISO Standards:	ISO 9001; ISO 14001; ISO 45001; ISO 50001
----------------	---

Sustainability

GWP Index:	
Refrigeration power:	0 W
Refrigerant weight (unit 1):	0 g
Energy Class (EU Reg. 2015/1094):	
Yearly and daily energy consumption (EU Reg. 2015/1094):	
Climate class (EU Reg. 2015/1094):	
Energy Efficiency Index-EEI (EU Reg. 2015/1094):	