

## Digital Undercounter ecostore HP Refrigerated Counter - 2 Door (R134a)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



710427 (EJ2RBAA)

2-door Refrigerated Counter  
-2\*10°C (R134A), without  
WorkTop

### Short Form Specification

#### Item No.

AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. N. 2 full doors. Built-in refrigeration unit. Operating temperature: -2\*10°C. R134a gas in refrigeration circuit. Supplied with 1 grid for each door compartment

### Main Features

- Tropicalized unit (43°C ambient temperature).
- Kit 1/3 drawers available as accessory.
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Complies with main international certification bodies and is CE marked.
- Kit 1/2 drawers available as accessory.
- The door self-closes when opened less than at a 90° angle and is equipped with a door seal to guarantee perfect closure.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Forced air cooling system guaranteeing great uniformity of the temperature in the counter and excellent conservation of the food quality.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).

### Construction

- External back panel in galvanized steel.
- Built-in compressor to suit operating conditions.
- CFC and HCFC free.
- Legs in 304 AISI stainless steel (150 mm high, adjustable in height), with plastic interior.
- Internal and external doors, front and side panels in 304 AISI stainless steel.

### Included Accessories

- 2 of Kit 1/1 grey rilsan grid and 2 side runners for refrigerated counters PNC 881109

### Optional Accessories


- Ethernet connector for IR33 (CAREL) Refrigerated Cabinets and Counters PNC 880252 ☐
- 1/1GN grey rilsan grid for refrigerated counters PNC 881107 ☐
- 2 side runners for 1/1 GN ecostore refrigerated counters PNC 881108 ☐
- Kit 1/1 grey rilsan grid and 2 side runners for refrigerated counters PNC 881109 ☐
- 1/1 GN plastic container, H=65 mm PNC 881110 ☐
- Worktop for refrigerated counter, 2 compartments PNC 881124 ☐
- Worktop with upstand for refrigerated counter, 2 compartments PNC 881127 ☐
- 2x½ drawer kit for refrigerated counters - h650mm PNC 881176 ☐

APPROVAL: \_\_\_\_\_




- |  |            |                          |
|--|------------|--------------------------|
| • 3x1/3 drawer kit for refrigerated counters - h650mm (only for refrigerated counters)                           | PNC 881177 | <input type="checkbox"/> |
| • 1/3 and 2/3 bottle drawer kit for refrigerated counters - h650mm (only for refrigerated counters)              | PNC 881178 | <input type="checkbox"/> |
| • Kit 4 wheels, H=100 mm (2 with brakes) for refrigerated counters   | PNC 881191 | <input type="checkbox"/> |
| • Kit 4 wheels, H=150 mm (2 with brakes) for 2&3 compartment refrigerated counters                               | PNC 881193 | <input type="checkbox"/> |
| • Lock for refrigerator/freezer counters with 2 compartments - h650mm (can be used in kit for Marine conversion) | PNC 881245 | <input type="checkbox"/> |
| • Kit 4 (45mm) spacers for wheels for refrigerator/freezer counters  | PNC 881277 | <input type="checkbox"/> |

Front

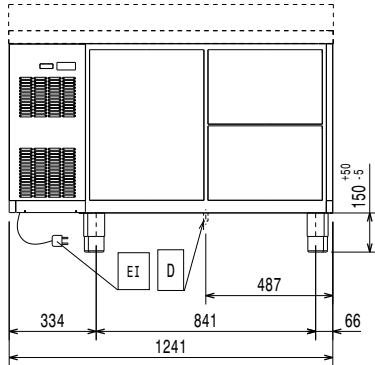


Side

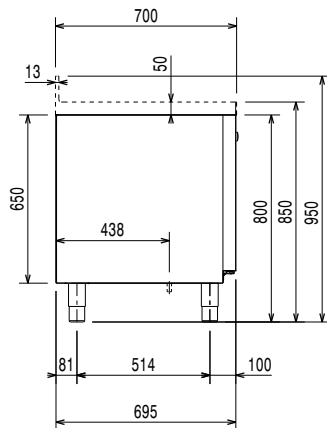

EI = Electrical inlet (power)

Top

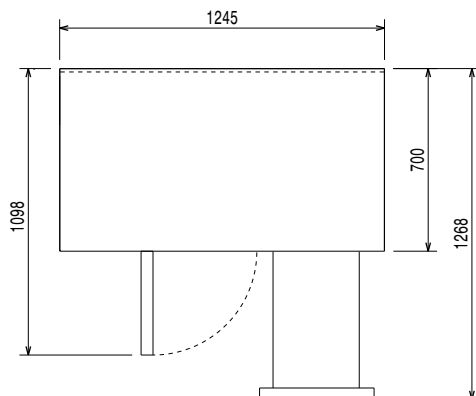

## Electric

Supply voltage:

710427 (EJ2RBAA)

220-240 V/1 ph/50 Hz

Electrical power max.:

0.22 kW

## Key Information:

Gross capacity:

Net Volume:

163.6 lt

N° of doors:

External dimensions, Width:

1241 mm

External dimensions, Depth:

700 mm

External dimensions, Height:

800 mm

Internal Dimensions, Width:

798 mm

Internal Dimensions, Depth:

560 mm

Internal Dimensions, Height:

510 mm

Net weight:

90 kg

Shipping volume:

 1.03 m<sup>3</sup>

Depth with doors open:

1310 mm

## Refrigeration Data

Control type:

Digital

Compressor power:

1/4 hp

Refrigerant type:

R134a

GWP Index:

1300

Refrigeration power:

358 W

Refrigerant weight:

90 g

Min/Max internal humidity:

40/85

Operating temperature min.:

-2 °C

Operating temperature max.:

10 °C

Operating mode:

Ventilated

## Product Information (EU Regulation 2015/1094)

Energy Class:

B

 Yearly and daily energy  
consumption:

560kWh/year - 2kWh/24h

Climate class:

Heavy Duty (5)

Energy Efficiency Index (EEI):

25,36



**Electrolux**  
PROFESSIONAL

## Digital Undercounter ecostore HP Refrigerated Counter - 2 Door (R134a)



### EU energy labelling from 1st July 2016

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU.

These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe. Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

SI 2020 No. 1528.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

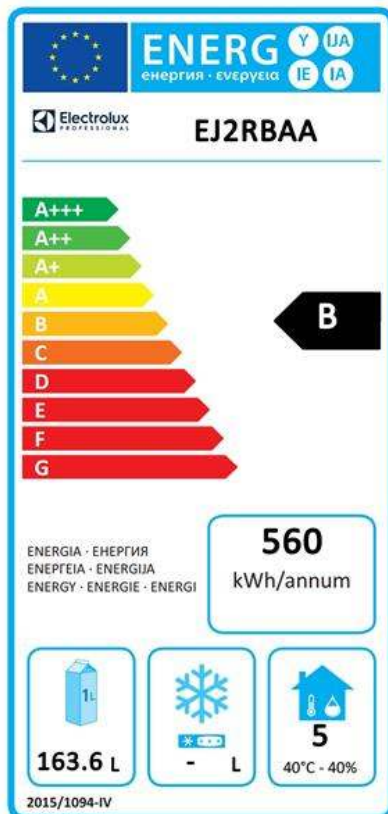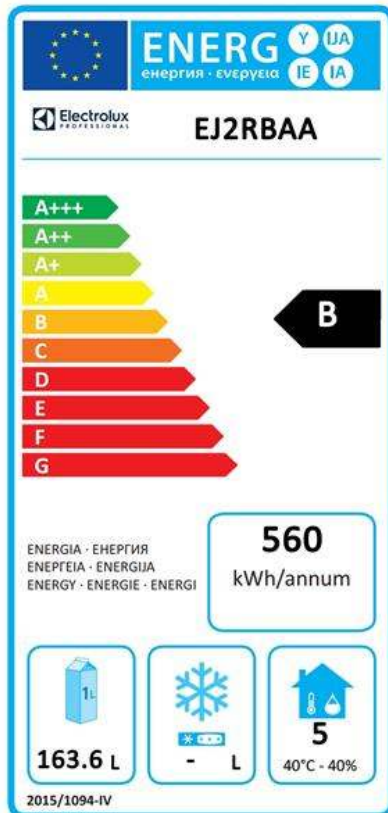

Digital Undercounter  
ecostore HP Refrigerated Counter - 2 Door (R134a)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2023.01.23