

## Digital Undercounter ecostore HP Refrigerated Counter - 4 Door (R134a) with top - Remote

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_


**710414 (EJ4RRAAAA)**

 4-door Refrigerated  
 Counter, -2+10°C, AISI 304,  
 remote

### Short Form Specification

**Item No.** \_\_\_\_\_

AISI 304 stainless steel panels, AISI 430 bottom panel, galvanized back panel. Worktop thickness 50mm. N. 4 full doors. For connection to a remote refrigeration unit (not included). Operating temperature: -2+10°C. R134a gas in refrigeration circuit. Supplied with 1 grid for each door compartment

### Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Complies with main international certification bodies and is CE marked.
- Kit 1/2 drawers available as accessory.
- Forced air cooling system guaranteeing great uniformity of the temperature in the counter and excellent conservation of the food quality.
- Completely automatic defrosting.
- Kit 1/3 drawers available as accessory.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory).
- Easy serviceability thanks to the intuitive control panel with access via app.
- Integrated RS485 port to facilitate connection to a remote computer and integrated HACCP systems.

### Construction

- Remote refrigeration unit.
- CFC and HCFC free.
- Legs in 304 AISI stainless steel (150 mm high, adjustable in height), with plastic interior.
- Internal and external doors, front and side panels and 50mm thick removable worktop in 304 AISI stainless steel.
- Back panel in galvanized steel.
- The door self-closes when opened less than at a 90° angle and is equipped with a door seal to guarantee perfect closure.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids.

### Included Accessories


- 4 of Kit 1/1 grey rilsan grid and 2 PNC 881109 side runners for refrigerated counters

### Optional Accessories

- Automatic defrost with waste evaporation PNC 880028
- Remote unit for refrigerators and refrigerated counters, -2+10°C, R134a PNC 880231
- 1/1GN grey rilsan grid for refrigerated counters PNC 881107
- 2 side runners for 1/1 GN ecostore refrigerated counters PNC 881108
- Kit 1/1 grey rilsan grid and 2 side runners for refrigerated counters PNC 881109
- 1/1 GN plastic container, H=65 mm PNC 881110
- 1/1 GN plastic container, H=100 mm PNC 881111

**APPROVAL:** \_\_\_\_\_

- 1/1 GN plastic container, H=150 mm PNC 881112
- 2x½ drawer kit for refrigerated counters - h650mm PNC 881176
- 3x1/3 drawer kit for refrigerated counters - h650mm (only for refrigerated counters) PNC 881177
- 1/3 and 2/3 bottle drawer kit for refrigerated counters - h650mm (only for refrigerated counters) PNC 881178
- Lock for refrigerator/freezer counters with 4 compartments - h650mm (can be used in kit for Marine conversion) PNC 881247

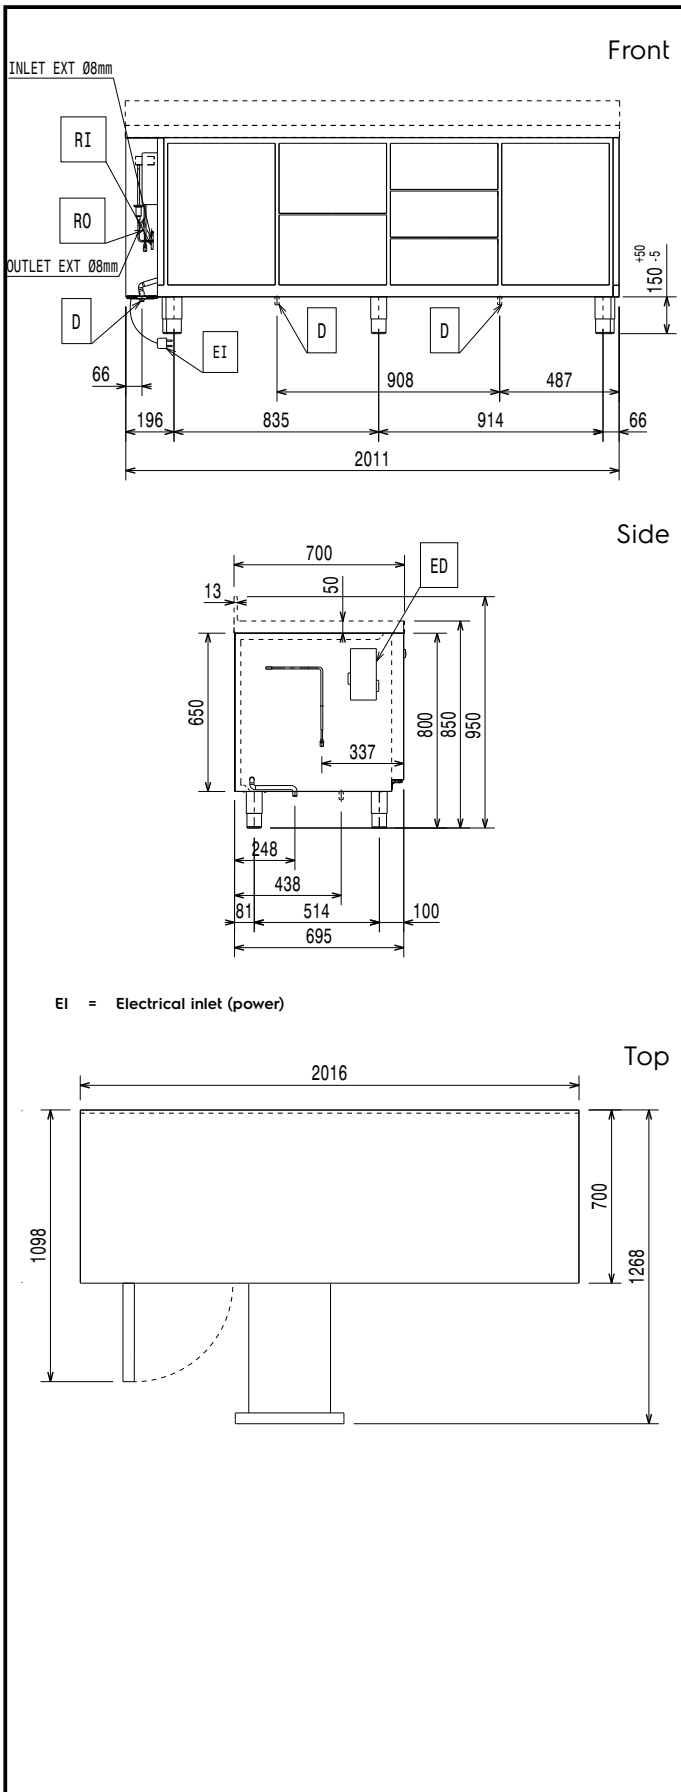

## Electric

<b>Supply voltage:</b>	710414 (EJ4RRAAAA)	220-240 V/1 ph/50/60 Hz
<b>Electrical power max.:</b>		0.03 kW
<b>Defrost Power:</b>		0.22 kW
<b>Plug type:</b>		CE-SCHUKO

## Key Information:

<b>Gross capacity:</b>		327 lt
<b>Net Volume:</b>		1 Left+3 Right
<b>Door hinges:</b>		1 Left+3 Right
<b>External dimensions, Width:</b>		2016 mm
<b>External dimensions, Depth:</b>		700 mm
<b>External dimensions, Height:</b>		850 mm
<b>Internal Dimensions, Width:</b>		1706 mm
<b>Internal Dimensions, Depth:</b>		560 mm
<b>Internal Dimensions, Height:</b>		510 mm
<b>Net weight:</b>		120 kg
<b>Shipping volume:</b>		1.79 m <sup>3</sup>
<b>Depth with doors open:</b>		1110 mm
<b>Height adjustment:</b>		-5/50 mm

## Refrigeration Data

<b>Control type:</b>	Digital
<b>Min/Max internal humidity:</b>	40/85
<b>Operating temperature min.:</b>	-2 °C
<b>Operating temperature max.:</b>	10 °C
<b>Refrigeration type:</b>	R134a;R513A;R426A
<b>Operating mode:</b>	Ventilated
<b>Suggested refrigeration power:</b>	368 W
<b>Condition at evaporation temperature:</b>	-10 °C
<b>Condition at condensation temperature:</b>	55 °C
<b>Condition at ambient temperature:</b>	35 °C
<b>Connection pipes (remote) - outlet:</b>	9.5 mm
<b>Connection pipes (remote) - inlet:</b>	8 mm

## ISO Certificates

<b>ISO Standards:</b>	ISO 9001; ISO 14001; ISO 45001; ISO 50001
-----------------------	---

## Sustainability

<b>Current consumption:</b>	0.3 Amps
<b>GWP Index:</b>	

Digital Undercounter  
ecostore HP Refrigerated Counter - 4 Door (R134a) with top - Remote

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.