

Modular Cooking Range Line thermaline 80 - 200 mm Closed Work top, 1 Side with Backsplash

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		



588105 (MANABBBOOO)

Closed Work Top, one-side operated with backsplash

Short Form Specification

Item No.

Closed work top, 200 mm wide, constructed according to DIN 18860 2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: One-side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

Main Features

- IPX5 water resistance certification.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.

• Insert profile D=800mm

C	Optional Accessories			
•	Connecting rail kit for appliances with backsplash, 800mm	PNC	912497	
•	Portioning shelf, 200mm width	PNC	912520	
•	Portioning shelf, 200mm width	PNC	912550	
•	Folding shelf, 300x800mm	PNC	912577	
•	Folding shelf, 400x800mm		912578	
•	Fixed side shelf, 200x800mm	PNC	912583	
•	Fixed side shelf, 300x800mm	PNC	912584	
•	Fixed side shelf, 400x800mm	PNC	912585	
•	Connecting rail kit for appliances with backsplash: modular 80 (on the left), ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right)	PNC	912977	
•	Connecting rail kit for appliances with backsplash: modular 80 (on the right), ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left)	PNC	912978	
•	Back panel, 200x700mm, for units with backsplash	PNC	913007	
•	Back panel, 200x800mm, for units with backsplash	PNC	913020	
•	Endrail kit, flush-fitting, with backsplash, left	PNC	913113	
•	Endrail kit, flush-fitting, with backsplash, right	PNC	913114	
•	Endrail kit (12.5mm) for thermaline 80 units with backsplash, left	PNC	913204	
•	Endrail kit (12.5mm) for thermaline 80 units with backsplash, right	PNC	913205	
•	U-clamping rail for back-to-back installations with backsplash	PNC	913226	
				_


PNC 913230 🗅

APPROVAL:





Modular Cooking Range Line thermaline 80 - 200 mm Closed Work top, 1 Side with Backsplash

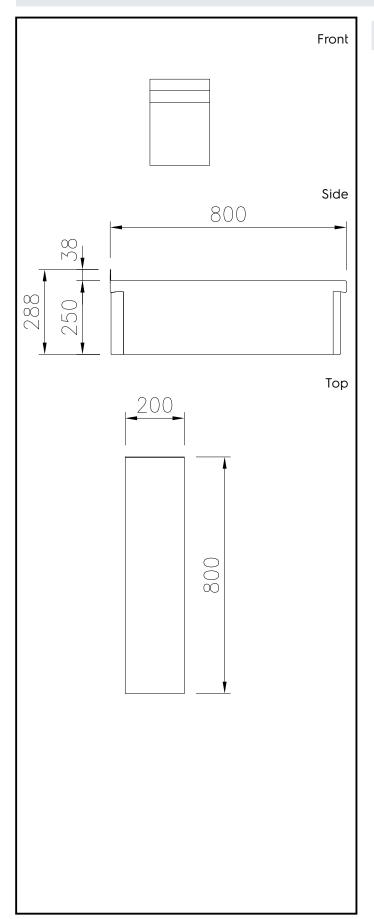

Key Information:

External dimensions, Width:

588105 (MANABBBOOO)200 mmExternal dimensions, Depth:800 mmExternal dimensions, Height:250 mmNet weight:6 kg

Modular Cooking Range Line thermaline 80 - 200 mm Closed Work top, 1 Side with Backsplash