



Electrolux
PROFESSIONAL

Modular Cooking Range Line thermaline 80 - 700 mm Closed Work top, 1 Side

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



588114 (MANABAGOOO)

Closed Work Top, one-side
operated

Short Form Specification

Item No. _____

Closed work top, 700 mm wide, constructed according to DIN 18860_2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: One-side operated top. The base needs to be supplied by the factory. Please include appropriate base.

Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.

Optional Accessories

- | | | |
|--|------------|--------------------------|
| • Connecting rail kit, 800mm | PNC 912500 | ☐ |
| • Portioning shelf, 700mm width | PNC 912525 | ☐ |
| • Portioning shelf, 700mm width | PNC 912555 | ☐ |
| • Folding shelf, 300x800mm | PNC 912577 | ☐ |
| • Folding shelf, 400x800mm | PNC 912578 | ☐ |
| • Fixed side shelf, 200x800mm | PNC 912583 | ☐ |
| • Fixed side shelf, 300x800mm | PNC 912584 | ☐ |
| • Fixed side shelf, 400x800mm | PNC 912585 | ☐ |
| • Connecting rail kit: modular 80 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic (on the right) | PNC 912971 | ☐ |
| • Connecting rail kit: modular 80 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic (on the left) | PNC 912972 | ☐ |
| • Endrail kit, flush-fitting, left | PNC 913109 | ☐ |
| • Endrail kit, flush-fitting, right | PNC 913110 | ☐ |
| • Endrail kit (12.5mm) for thermaline 80 units, left | PNC 913200 | ☐ |
| • Endrail kit (12.5mm) for thermaline 80 units, right | PNC 913201 | ☐ |
| • T-connection rail for back-to-back installations without backsplash (to be ordered as S-code) | PNC 913227 | ☐ |
| • Insert profile D=800mm | PNC 913230 | ☐ |
| • Endrail kit, (12.5mm), for back-to-back installation, left | PNC 913249 | ☐ |
| • Endrail kit, (12.5mm), for back-to-back installation, right | PNC 913250 | ☐ |
| • Endrail kit, flush-fitting, for back-to-back installation, left | PNC 913253 | ☐ |
| • Endrail kit, flush-fitting, for back-to-back installation, right | PNC 913254 | ☐ |

APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com




Electrolux
PROFESSIONAL

**Modular Cooking Range Line
thermaline 80 - 700 mm Closed
Work top, 1 Side**


Front



Side

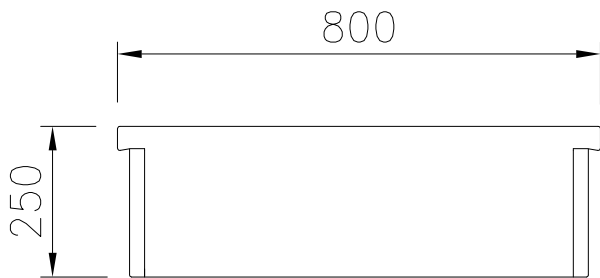

Top

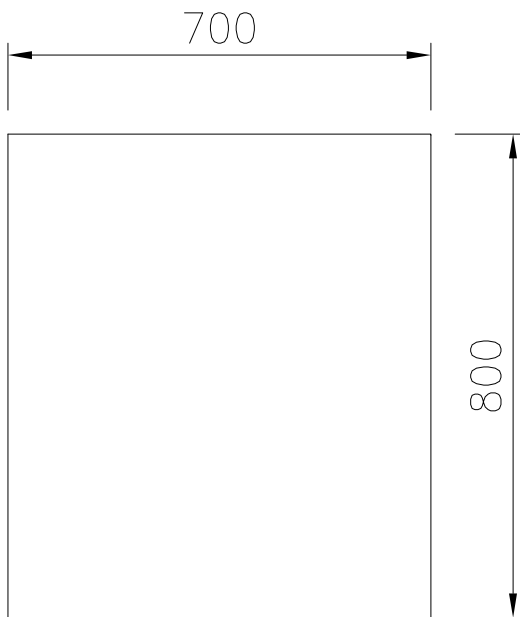

Key Information:

External dimensions, Width:

588114 (MANABAGOOO) 700 mm

External dimensions, Depth: 800 mm

External dimensions, Height: 250 mm

Net weight: 17 kg

Modular Cooking Range Line
thermaline 80 - 700 mm Closed Work top, 1 Side

The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2025.10.04