

Modular Cooking Range Line thermaline 80 - 1500 mm Closed Work top, 1 Side with Backsplash

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



Main Features

- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

Construction

- IPX5 water resistance certification.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top.

588125 (MANABBLOOO)

Closed Work Top, one-side operated with backsplash

Short Form Specification

Item No.

Closed work top, 1500 mm wide, constructed according to DIN 18860_2 with 20 mm drop nose top. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.


Configuration: One-side operated top with backsplash. The base needs to be supplied by the factory. Please include appropriate base.

APPROVAL:





Modular Cooking Range Line thermaline 80 - 1500 mm Closed Work top, 1 Side with Backsplash

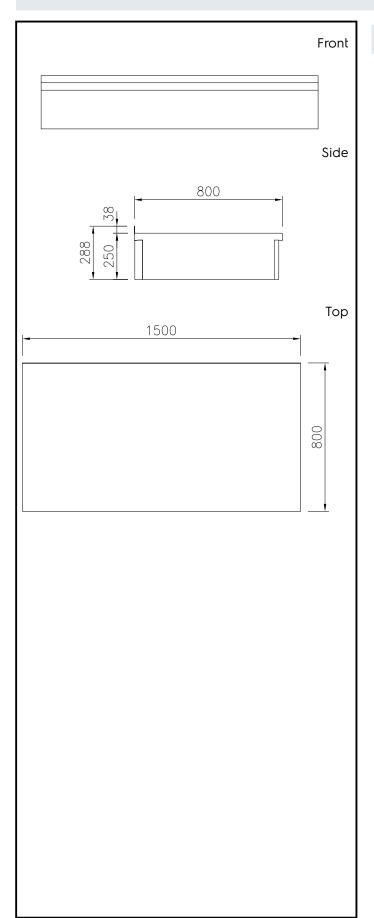

Key Information:

External dimensions, Width:

588125 (MANABBLOOO)1500 mmExternal dimensions, Depth:800 mmExternal dimensions, Height:250 mmNet weight:35 kg