

Modular Cooking Range Line thermaline 80 - 400 mm Open base, GN conform, 1 Side (H2) - H=450



588126 (MAIBCADOOO)

Open Base, one-side operated, GN - H2

Short Form Specification

Item No.

400 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Unit constructed according to DIN 18860_2 with 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Open storage space in the base accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
<u>AIA #</u>	

Main Features

- IPX5 water resistance certification.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.


Construction

- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance that can accept GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:

Electrolux PROFESSIONAL

Modular Cooking Range Line thermaline 80 - 400 mm Open base, GN conform, 1 Side (H2) - H=450

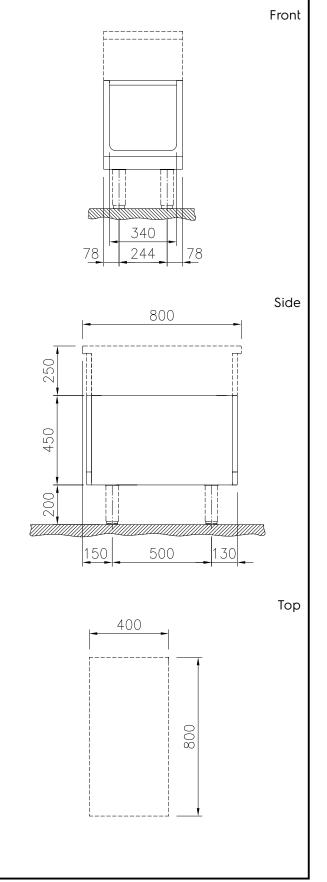

CE

DNVGL

Key Information:

External dimensions, Width:	
588126 (MA1BCADOOO)	400 mm
External dimensions, Depth:	800 mm
External dimensions, Height:	450 mm
Cupboard Cavity Dimensions (width):	340 mm
Cupboard Cavity Dimensions (height):	330 mm
Cupboard Cavity Dimensions (depth):	740 mm
Net weight:	16 kg

Modular Cooking Range Line thermaline 80 - 400 mm Open base, GN conform, 1 Side (H2) - H=450

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Optional Accessories • Stainless steel side panel, PNC 912509 800x700mm, freestanding Stainless steel front kicking strip, PNC 912630 400mm width Stainless steel side kicking strip PNC 912655 left and right, freestanding, 800mm width Stainless steel side kicking strip PNC 912658 left and right, against the wall, 800mm width • Stainless steel side kicking strip PNC 912661 left and right, back-to-back, 1610mm width Stainless steel plinth, against PNC 912840 wall, 400mm width PNC 912859 Stainless steel plinth, freestanding, 400mm width PNC 913093 Stainless steel panel, 800x700mm, against wall, left side • Stainless steel panel, 800x700m, PNC 913097 against the wall, right side • Back panel, 400x450mm, for PNC 913163 bases one-side operated Stainless steel side panel, left, PNC 913214 H=700 Stainless steel side panel, right, PNC 913215 H=700 Perforated shelf for warming PNC 913233 cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) • Side reinforced panel only in PNC 913258 combination with side shelf, for freestanding units • Side reinforced panel only in PNC 913263 combination with side shelf, for against the wall installations, left • Side reinforced panel only in PNC 913265 combination with side shelf, for against the wall installations, right • Side reinforced panel only in PNC 913271 combination with side shelf, for back-to-back installations, left • Side reinforced panel only in PNC 913272 combination with side shelf, for back-to-back installation, right • Shelf fixation for TL80-85-90 one- PNC 913279 side operated, TL80 two-side operated • Stainless steel dividing panel, PNC 913668 800x700mm, (it should only be

used between Electrolux Professional thermaline Modular 80 and thermaline C80)

Modular Cooking Range Line thermaline 80 - 400 mm Open base, GN conform, 1 Side (H2) - H=450

PNC 913684

 Stainless steel side panel, 800x700mm, flush-fitting (it should only be used against the wall, against a niche and in between **Electrolux Professional thermaline** and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)

Modular Cooking Range Line thermaline 80 - 400 mm Open base, GN conform, 1 Side (H2) - H=450

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.