

## Modular Cooking Range Line thermaline 80 - 900 mm Open base, 1 Side (H2) - H=450

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



588127 (MA1ACAIOOO)

Open Base, one-side operated - H2

## **Short Form Specification**

### Item No.

900 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

### **Main Features**

- Open base compartment for storage of pots, pans, sheet pans, etc.
- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

### Construction


- IPX5 water resistance certification.
- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

#### APPROVAL:





# Modular Cooking Range Line thermaline 80 - 900 mm Open base, 1 Side (H2) - H=450

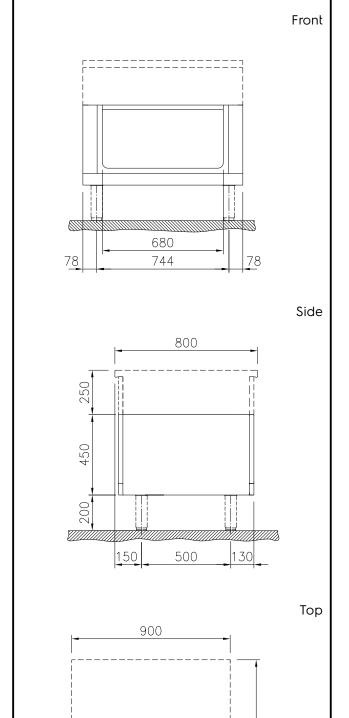

### **Key Information:**

External dimensions, Width: 588127 (MA1ACAIOOO) 900 mm External dimensions, Depth: 800 mm External dimensions, Height: 450 mm **Cupboard Cavity Dimensions** 680 mm **Cupboard Cavity Dimensions** 330 mm (height): **Cupboard Cavity Dimensions** 740 mm (depth): Net weight: 21 kg





# Modular Cooking Range Line thermaline 80 - 900 mm Open base, 1 Side (H2) - H=450

		Stainless steel side panel,	PNC 913684	
Optional Accessories	DN C 010500	800x700mm, flush-fitting (it should		
<ul> <li>Stainless steel side panel, 800x700mm, freestanding</li> </ul>	PNC 912509	only be used against the wall, against a niche and in between Electrolux Professional thermaline		
<ul> <li>Stainless steel front kicking strip, 900mm width</li> </ul>	PNC 912635	and ProThermetic appliances and external appliances - provided that		
<ul> <li>Stainless steel side kicking strip left and right, freestanding, 800mm width</li> </ul>	PNC 912655	these have at least the same dimensions)		
<ul> <li>Stainless steel side kicking strip left and right, against the wall, 800mm width</li> </ul>	PNC 912658			
<ul> <li>Stainless steel side kicking strip left and right, back-to-back, 1610mm width</li> </ul>	PNC 912661			
<ul> <li>Stainless steel plinth, against wall, 900mm width</li> </ul>	PNC 912845			
Stainless steel plinth, freestanding, 900mm width	PNC 912864			
Stainless steel panel, 800x700mm, against wall, left side	PNC 913093			
<ul> <li>Stainless steel panel, 800x700m, against the wall, right side</li> </ul>	PNC 913097			
Back panel, 900x450mm, for bases one-side operated	PNC 913168			
• Stainless steel side panel, left, H=700	PNC 913214			
<ul> <li>Stainless steel side panel, right, H=700</li> </ul>	PNC 913215			
<ul> <li>Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)</li> </ul>	PNC 913235			
<ul> <li>Side reinforced panel only in combination with side shelf, for freestanding units</li> </ul>	PNC 913258			
<ul> <li>Side reinforced panel only in combination with side shelf, for against the wall installations, left</li> </ul>	PNC 913263			
<ul> <li>Side reinforced panel only in combination with side shelf, for against the wall installations, right</li> </ul>	PNC 913265			
<ul> <li>Side reinforced panel only in combination with side shelf, for back-to-back installations, left</li> </ul>	PNC 913271			
<ul> <li>Side reinforced panel only in combination with side shelf, for back-to-back installation, right</li> </ul>	PNC 913272			
<ul> <li>Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated</li> </ul>	PNC 913283			
Stainless steel dividing panel, 800x700mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80)	PNC 913668			

