

## Modular Cooking Range Line thermaline 80 - 1000 mm Open base, 1 Side (H2) - H=450

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



588128 (MA1ACAJOOO)

Open Base, one-side operated - H2

# **Short Form Specification**

#### Item No.

1000 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

#### **Main Features**

- Open base compartment for storage of pots, pans, sheet pans, etc.
- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

### Construction


- IPX5 water resistance certification.
- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

#### APPROVAL:





# Modular Cooking Range Line thermaline 80 - 1000 mm Open base, 1 Side (H2) - H=450

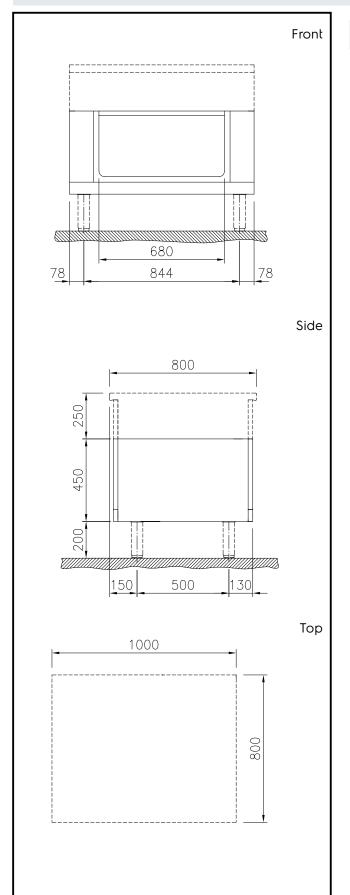

## **Key Information:**

External dimensions, Width: 588128 (MA1ACAJOOO) 1000 mm External dimensions, Depth: 800 mm External dimensions, Height: 450 mm **Cupboard Cavity Dimensions** (width): 680 mm **Cupboard Cavity Dimensions** 330 mm (height):

**Cupboard Cavity Dimensions** (depth):

Net weight:

740 mm 22 kg



## Modular Cooking Range Line thermaline 80 - 1000 mm Open base, 1 Side (H2) - H=450

PNC 913684

Optional Accessories	
<ul> <li>Stainless steel side panel, 800x700mm, freestanding</li> </ul>	PNC 912509
. Chairdann abhaid fuairbhialite a shiin	DNIC 010777

Stainless steel side kicking strip PNC 912655 
left and right, freestanding, 800mm width

 Stainless steel side kicking strip left and right, against the wall, 800mm width
 PNC 912658 

PNC 912658 

Output

Stainless steel side kicking strip PNC 912661 left and right, back-to-back, 1610mm width

• Stainless steel plinth, against PNC 912846 ☐ wall, 1000mm width

• Stainless steel plinth, PNC 912865 ☐ freestanding, 1000mm width

 Stainless steel panel, 800x700mm, against wall, left side
 PNC 913093 

PNC 913093

• Stainless steel panel, 800x700m,

PNC 913097 🗖

against the wall, right side
 Back panel, 1000x450mm, for bases one-side operated

Stainless steel side panel, left, PNC 913214 EH=700

Stainless steel side panel, right, PNC 913215 ☐ H=700

 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)

 Side reinforced panel only in combination with side shelf, for freestanding units

PNC 913258

 Side reinforced panel only in combination with side shelf, for against the wall installations, left

 Side reinforced panel only in combination with side shelf, for against the wall installations, right

 Side reinforced panel only in combination with side shelf, for back-to-back installations, left

 Side reinforced panel only in combination with side shelf, for back-to-back installation, right

 Shelf fixation for TL80-85-90 one- PNC 913283 side operated, TL80 two-side operated

 Stainless steel dividing panel, 800x700mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80)  Stainless steel side panel, 800x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)

DNV-GL