

# Modular Cooking Range Line thermaline 80 - 1200 mm Open base, 1 Side (H2) - H=450

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



588129 (MA1ACAKOOO)

Open Base, one-side operated - H2

# **Short Form Specification**

#### Item No.

1200 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

#### **Main Features**

- Open base compartment for storage of pots, pans, sheet pans, etc.
- IPX5 water resistance certification.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth.

#### Construction


- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

#### APPROVAL:





# Modular Cooking Range Line thermaline 80 - 1200 mm Open base, 1 Side (H2) - H=450

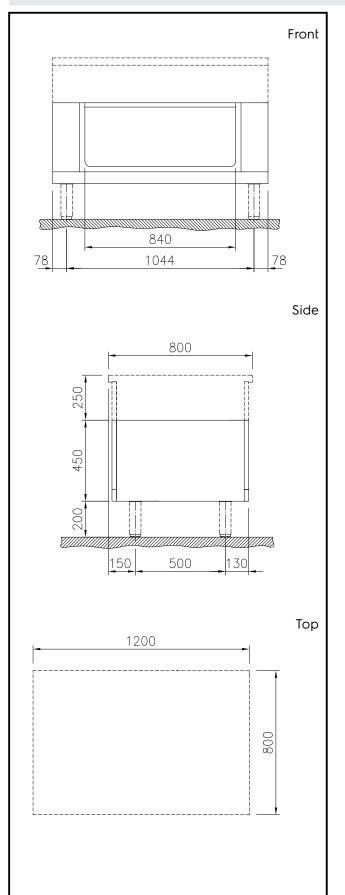

### **Key Information:**

External dimensions, Width:
588129 (MAIACAKOOO)
1200 mm
External dimensions, Depth:
800 mm
450 mm
Cupboard Cavity Dimensions (width):
840 mm
Cupboard Cavity Dimensions (height):
330 mm

Cupboard Cavity Dimensions (depth): 740 mm
Net weight: 24 kg





## Modular Cooking Range Line thermaline 80 - 1200 mm Open base, 1 Side (H2) - H=450

Optional Accessories		
<ul> <li>Stainless steel side panel, 800x700mm, freestanding</li> </ul>	PNC 912509	
- Chainlass shoot front kicking strip	DNIC 012470	г

Stainless steel front kicking strip, PNC 912638 ☐ 1200mm width
 Stainless steel side kicking strip
 PNC 912655 ☐

left and right, freestanding, 800mm width
Stainless steel side kicking strip left and right, against the wall,

800mm width
Stainless steel side kicking strip PNC 912661 ☐ left and right, back-to-back,

1610mm width

■ Stainless steel plinth, against wall, 1200mm width

PNC 912848 □

• Stainless steel plinth, PNC 912867 ☐ freestanding, 1200mm width

 Stainless steel panel, 800x700mm, against wall, left side

Stainless steel panel, 800x700m, PNC 913097 ☐ against the wall, right side

Back panel, 1200x450mm, for PNC 913171 Dases one-side operated

 Stainless steel side panel, left, H=700
 PNC 913214

 Stainless steel side panel, right, PNC 913215 E H=700

 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90

and two-side operated for TL80)
 Side reinforced panel only in combination with side shelf, for freestanding units

 Side reinforced panel only in combination with side shelf, for

against the wall installations, left
 Side reinforced panel only in combination with side shelf, for against the wall installations,

right

• Side reinforced panel only in combination with side shelf, for back to back installations. Left

back-to-back installations, left
 Side reinforced panel only in
 PNC 913272

combination with side shelf, for back-to-back installation, right

■ Shelf fixation for TL80-85-90 one- PNC 913279 □

Shelf fixation for TL80-85-90 one-PNC 913279 C
 side operated, TL80 two-side
 operated

 Stainless steel dividing panel, 800x700mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80)  Stainless steel side panel, 800x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions) PNC 913684 🚨

