Modular Cooking Range Line thermaline 80 - 1200 mm Open base, 1 Side (H2) - H=450

588129 (MA1ACAKOOO)   Open Base, one-side operated - H2

Short Form Specification

Item No.

1200 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Unit constructed according to DIN 18860_2 with 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable.
IPX5 water resistant certification.
Configuration: One-side operated freestanding base, hygienic class H2.

Main Features
- Open base compartment for storage of pots, pans, sheet pans, etc.
- IPX5 water resistance certification.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.
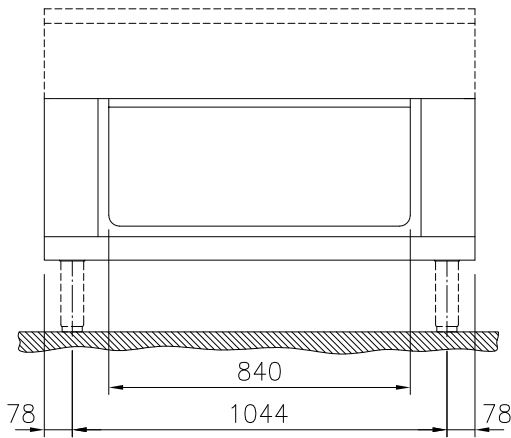
Construction
- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
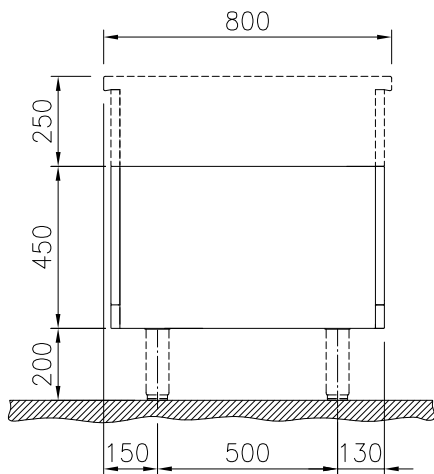- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:

Electrolux PROFESSIONAL

Front

Side

Top
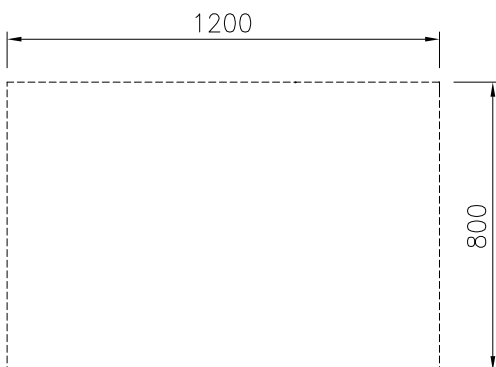
Key Information:

External dimensions, Width:	
588129 (MA1ACAKOOO)	1200 mm
External dimensions, Depth:	800 mm
External dimensions, Height:	450 mm
Cupboard Cavity Dimensions (width):	840 mm
Cupboard Cavity Dimensions (height):	330 mm
Cupboard Cavity Dimensions (depth):	740 mm
Net weight:	24 kg

CE

2024.04.23

Optional Accessories

• Stainless steel side panel, 800x700mm, freestanding	PNC 912509 ❏
• Stainless steel front kicking strip, 1200mm width	PNC 912638 ❏
• Stainless steel side kicking strip left and right, freestanding, 800mm width	PNC 912655 ❏
• Stainless steel side kicking strip left and right, against the wall, 800mm width	PNC 912658 ❏
• Stainless steel side kicking strip left and right, back-to-back, 1610mm width	PNC 912661 ❏
• Stainless steel plinth, against wall, 1200mm width	PNC 912848 ❏
• Stainless steel plinth, freestanding, 1200mm width	PNC 912867 ❏
• Stainless steel panel, 800x700mm, against wall, left side	PNC 913093 ❏
• Stainless steel panel, 800x700m, against the wall, right side	PNC 913097 ❏
• Back panel, 1200x450mm, for bases one-side operated	PNC 913171 ❏
• Stainless steel side panel, left, H=700	PNC 913214 ❏
• Stainless steel side panel, right, H=700	PNC 913215 ❏
• Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)	PNC 913239 ❏
• Side reinforced panel only in combination with side shelf, for freestanding units	PNC 913258 ❏
• Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913263 ❏
• Side reinforced panel only in combination with side shelf, for against the wall installations, right	PNC 913265 ❏
• Side reinforced panel only in combination with side shelf, for back-to-back installations, left	PNC 913271 ❏
• Side reinforced panel only in combination with side shelf, for back-to-back installation, right	PNC 913272 ❏
• Shelf fixation for TL80-85-90 one-side operated, TL80 two-side operated	PNC 913279 ❏
• Stainless steel dividing panel, 800x700mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80)	PNC 913668 ❏

• Stainless steel side panel, 800x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)	PNC 913684 ❏