

Modular Cooking Range Line thermaline 80 - 1200 mm Open base, 1 Side (H2) - H=450



588129 (MAIACAKOOO)

Open Base, one-side operated - H2

Short Form Specification

Item No.

1200 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

Main Features

- Open base compartment for storage of pots, pans, sheet pans, etc.
- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

Construction


- IPX5 water resistance certification.
- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:





Modular Cooking Range Line thermaline 80 - 1200 mm Open base, 1 Side (H2) - H=450

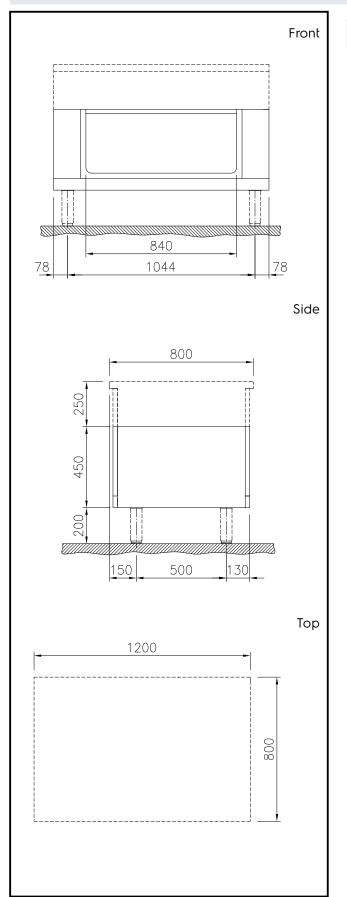

Key Information:

External dimensions, Width: 588129 (MAIACAKOOO) External dimensions, Depth:

1200 mm 800 mm 450 mm

External dimensions, Height: Cupboard Cavity Dimensions (width):

840 mm

Cupboard Cavity Dimensions (height):

330 mm

Cupboard Cavity Dimensions

740 mm

(depth): Net weight:

24 kg





Modular Cooking Range Line thermaline 80 - 1200 mm Open base, 1 Side (H2) - H=450

		Stainless steel side panel,	PNC 913684	
Optional Accessories		800x700mm, flush-fitting (it should		
 Stainless steel side panel, 800x700mm, freestanding 	PNC 912509	only be used against the wall, against a niche and in between		
 Stainless steel front kicking strip, 1200mm width 	PNC 912638	Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that		
 Stainless steel side kicking strip left and right, freestanding, 800mm width 	PNC 912655	these have at least the same dimensions)		
 Stainless steel side kicking strip left and right, against the wall, 800mm width 	PNC 912658			
 Stainless steel side kicking strip left and right, back-to-back, 1610mm width 	PNC 912661			
 Stainless steel plinth, against wall, 1200mm width 	PNC 912848			
 Stainless steel plinth, freestanding, 1200mm width 	PNC 912867			
 Stainless steel panel, 800x700mm, against wall, left side 	PNC 913093			
 Stainless steel panel, 800x700m, against the wall, right side 	PNC 913097			
 Back panel, 1200x450mm, for bases one-side operated 	PNC 913171			
• Stainless steel side panel, left, H=700	PNC 913214			
 Stainless steel side panel, right, H=700 	PNC 913215			
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913239			
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913258			
 Side reinforced panel only in combination with side shelf, for against the wall installations, left 	PNC 913263			
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913265			
 Side reinforced panel only in combination with side shelf, for back-to-back installations, left 	PNC 913271			
 Side reinforced panel only in combination with side shelf, for back-to-back installation, right 	PNC 913272			
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913279			
Stainless steel dividing panel, 800x700mm, (it should only be used between Electrolux Professional thermaline Modular	PNC 913668			



Professional thermaline Modular

80 and thermaline C80)