

Modular Cooking Range Line thermaline 80 - 1200 mm Open base, 1 Side (H2) - H=450



588129 (MAIACAKOOO)

Open Base, one-side operated - H2

Short Form Specification

Item No.

1200 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

Main Features

- Open base compartment for storage of pots, pans, sheet pans, etc.
- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

Construction


- IPX5 water resistance certification.
- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:





Modular Cooking Range Line thermaline 80 - 1200 mm Open base, 1 Side (H2) - H=450

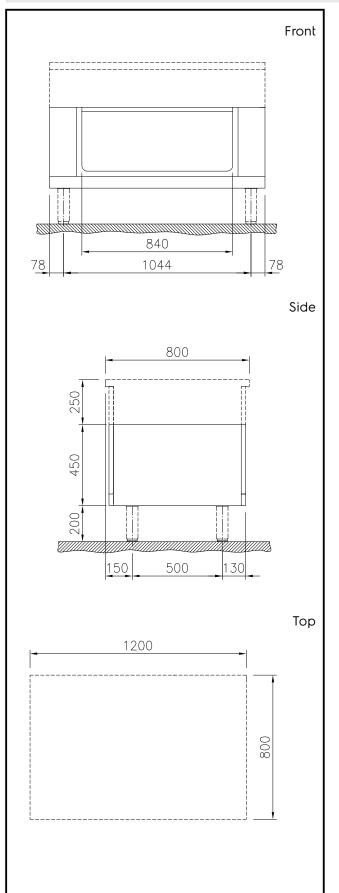

Key Information:

External dimensions, Width: 588129 (MA1ACAKOOO) External dimensions, Depth:

1200 mm 800 mm External dimensions, Height: 450 mm

Cupboard Cavity Dimensions (width):

840 mm

Cupboard Cavity Dimensions

(height):

330 mm

Cupboard Cavity Dimensions (depth):

740 mm

Net weight:

24 kg





Modular Cooking Range Line thermaline 80 - 1200 mm Open base, 1 Side (H2) - H=450

		- Chairless shoot side manel	PNC 913684
Optional Accessories		• Stainless steel side panel, 800x700mm, flush-fitting (it should	PINC 913002
 Stainless steel side panel, 800x700mm, freestanding 	PNC 912509	only be used against the wall, against a niche and in between	
• Stainless steel front kicking strip, 1200mm width	PNC 912638	Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that	
 Stainless steel side kicking strip left and right, freestanding, 800mm width 	PNC 912655	these have at least the same dimensions)	
 Stainless steel side kicking strip left and right, against the wall, 800mm width 	PNC 912658		
 Stainless steel side kicking strip left and right, back-to-back, 1610mm width 	PNC 912661		
• Stainless steel plinth, against wall, 1200mm width	PNC 912848		
• Stainless steel plinth, freestanding, 1200mm width	PNC 912867		
Stainless steel panel, 800x700mm, against wall, left side	PNC 913093		
• Stainless steel panel, 800x700m, against the wall, right side	PNC 913097		
Back panel, 1200x450mm, for bases one-side operated	PNC 913171		
• Stainless steel side panel, left, H=700	PNC 913214		
• Stainless steel side panel, right, H=700	PNC 913215		
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913239		
Side reinforced panel only in combination with side shelf, for freestanding units	PNC 913258		
Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913263		
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913265		
Side reinforced panel only in combination with side shelf, for back-to-back installations, left	PNC 913271		
 Side reinforced panel only in combination with side shelf, for back-to-back installation, right 	PNC 913272		
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913279		
Stainless steel dividing panel, 800x700mm, (it should only be used between Electrolux Professional thormaling Modular	PNC 913668		



Professional thermaline Modular

80 and thermaline C80)