

Modular Cooking Range Line thermaline 80 - 1200 mm Open base, 1 Side (H2) - H=450



588129 (MAIACAKOOO)

Open Base, one-side operated - H2

Short Form Specification

Item No.

1200 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

Main Features

- Open base compartment for storage of pots, pans, sheet pans, etc.
- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

Construction


- IPX5 water resistance certification.
- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:





Modular Cooking Range Line thermaline 80 - 1200 mm Open base, 1 Side (H2) - H=450

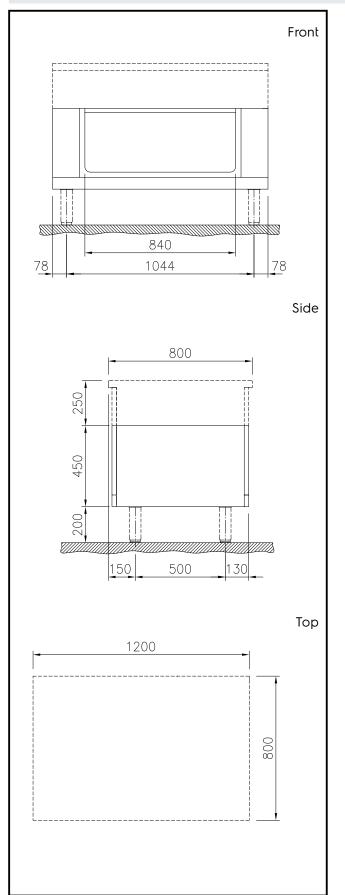

Key Information:

External dimensions, Width: 588129 (MA1ACAKOOO)

588129 (MAIACAKOOO) 1200 mm **External dimensions, Depth:** 800 mm **External dimensions, Height:** 450 mm **Cupboard Cavity Dimensions**

(width):

Net weight:

840 mm

Cupboard Cavity Dimensions (height):

330 mm

Cupboard Cavity Dimensions

740 mm

(depth):

24 kg





Modular Cooking Range Line thermaline 80 - 1200 mm Open base, 1 Side (H2) - H=450

Optional Accessories		Ī
 Stainless steel side panel, 800x700mm, freestanding 	PNC 912509 🗖	
• Stainless steel front kicking strip,	PNC 912638 🚨	

PNC 912661 🔲

PNC 912848 📮

PNC 912867 🔲

PNC 913093 📮

PNC 913097 📮

PNC 913171

PNC 913214

PNC 913215

PNC 913239 📮

PNC 913258 📮

PNC 913263 📮

PNC 913265 📮

PNC 913271 🔲

PNC 913272 🔲

PNC 913668 📮

1200mm width

■ Stainless steel side kicking strip PNC 912655 □ left and right, freestanding, 800mm width

 Stainless steel side kicking strip left and right, against the wall, 800mm width

 Stainless steel side kicking strip left and right, back-to-back, 1610mm width

• Stainless steel plinth, against wall, 1200mm width

 Stainless steel plinth, freestanding, 1200mm width

 Stainless steel panel, 800x700mm, against wall, left side

• Stainless steel panel, 800x700m, against the wall, right side

 Back panel, 1200x450mm, for bases one-side operated

• Stainless steel side panel, left, H=700

• Stainless steel side panel, right, H=700

 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)

 Side reinforced panel only in combination with side shelf, for freestanding units

 Side reinforced panel only in combination with side shelf, for against the wall installations, left

 Side reinforced panel only in combination with side shelf, for against the wall installations, right

 Side reinforced panel only in combination with side shelf, for back-to-back installations, left

 Side reinforced panel only in combination with side shelf, for back-to-back installation, right

• Shelf fixation for TL80-85-90 one- PNC 913279 side operated, TL80 two-side

operated
Stainless steel dividing panel, 800x700mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80) Stainless steel side panel, 800x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)

PNC 913684 🔲

