

Modular Cooking Range Line thermaline 80 - 1500 mm Open base, 1 Side (H2) - H=450

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	



588130 (MA1ACALOOO)

Open Base, one-side operated - H2

Short Form Specification

Item No.

1500 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Unit constructed according to DIN 18860_2 with 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

Main Features

- Open base compartment for storage of pots, pans, sheet pans, etc.
- IPX5 water resistance certification.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.

Construction


- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:





Modular Cooking Range Line thermaline 80 - 1500 mm Open base, 1 Side (H2) - H=450

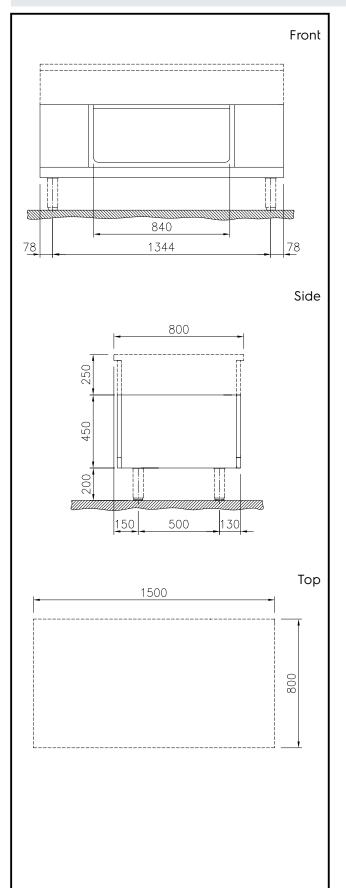

Key Information:

External dimensions, Width:
588130 (MA1ACALOOO)
1500 mm
External dimensions, Depth:
800 mm
External dimensions, Height:
450 mm
Cupboard Cavity Dimensions (width):
840 mm
Cupboard Cavity Dimensions (height):
330 mm

Cupboard Cavity Dimensions (depth): 740 mm
Net weight: 27 kg





Modular Cooking Range Line thermaline 80 - 1500 mm Open base, 1 Side (H2) - H=450

Optional Accessories		
 Stainless steel side panel, 	PNC	

C 912509 🗖 800x700mm, freestanding • Stainless steel front kicking strip, PNC 912641 🔲 1500mm width

• Stainless steel side kicking strip PNC 912655 📮 left and right, freestanding, 800mm width

• Stainless steel side kicking strip PNC 912658 🔲 left and right, against the wall, 800mm width

• Stainless steel side kicking strip PNC 912661 🔲 left and right, back-to-back, 1610mm width

• Stainless steel plinth, against PNC 912851 🔲 wall, 1500mm width

PNC 912870 📮 Stainless steel plinth, freestanding, 1500mm width

PNC 913093 📮 Stainless steel panel, 800x700mm, against wall, left

• Stainless steel panel, 800x700m, PNC 913097 📮 against the wall, right side

• Back panel, 1500x450mm, for PNC 913174 bases one-side operated

• Stainless steel side panel, left, PNC 913214 H=700

 Stainless steel side panel, right, PNC 913215 H=700

 Perforated shelf for warming PNC 913239 🔲 cabinets and cupboard bases (one-side operated TL80-85-90

and two-side operated for TL80) • Side reinforced panel only in PNC 913258 📮 combination with side shelf, for freestanding units

• Side reinforced panel only in PNC 913263 📮 combination with side shelf, for

against the wall installations, left • Side reinforced panel only in PNC 913265 📮 combination with side shelf, for against the wall installations,

right • Side reinforced panel only in PNC 913271 🔲 combination with side shelf, for

back-to-back installations, left • Side reinforced panel only in PNC 913272 🔲 combination with side shelf, for back-to-back installation, right

 Shelf fixation for TL80-85-90 one- PNC 913279 side operated, TL80 two-side

operated • Stainless steel dividing panel, PNC 913668 📮 800x700mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80)

 Stainless steel side panel, 800x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)

PNC 913684

