

Modular Cooking Range Line thermaline 80 - 500 mm Cupboard base with 1 door, GN conform, 1 Side (H2) -H=450

ITEM #		
MODEL #		
MODEL #		
NAME #		
SIS #		
AIA #		



588135 (MAIDCAEOOO)

Cupboard Base with 1 door, one-side operated, GN - H2

Short Form Specification

Item No.

500 mm wide cupboard base with 1 door with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

Main Features

- Cupboard compartment for storage of pots, pans, sheet pans etc.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.


Construction

- IPX5 water resistance certification.
- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:





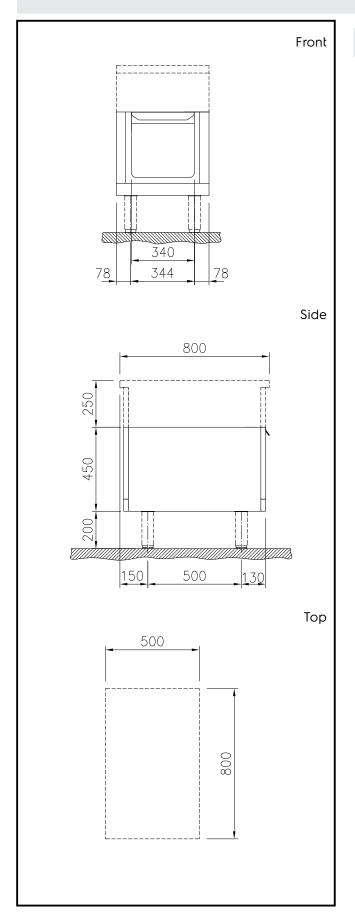

Key Information:

External dimensions, Width: 588135 (MAIDCAEOOO) 500 mm External dimensions, Depth: 800 mm External dimensions, Height: 450 mm **Cupboard Cavity Dimensions** 340 mm (width): **Cupboard Cavity Dimensions** 330 mm (height): **Cupboard Cavity Dimensions** (depth): 715 mm Net weight: 21 kg





Modular Cooking Range Line thermaline 80 - 500 mm Cupboard base with 1 door, GN conform, 1 Side (H2) - H=450

Online I Accession		Stainless steel side panel,	PNC 913684	
Optional Accessories	DNC 012500	800x700mm, flush-fitting (it should only be used against the wall,		
 Stainless steel side panel, 800x700mm, freestanding 	PNC 912509	against a niche and in between Electrolux Professional thermaline		
 Stainless steel front kicking strip, 500mm width 	PNC 912631	and ProThermetic appliances and external appliances - provided that		
 Stainless steel side kicking strip left and right, freestanding, 800mm width 	PNC 912655	these have at least the same dimensions)		
 Stainless steel side kicking strip left and right, against the wall, 800mm width 	PNC 912658			
 Stainless steel side kicking strip left and right, back-to-back, 1610mm width 	PNC 912661			
 Stainless steel plinth, against wall, 500mm width 	PNC 912841			
 Stainless steel plinth, freestanding, 500mm width 	PNC 912860			
 Stainless steel panel, 800x700mm, against wall, left side 	PNC 913093			
 Stainless steel panel, 800x700m, against the wall, right side 	PNC 913097			
Back panel, 500x450mm, for bases one-side operated	PNC 913164			
• Stainless steel side panel, left, H=700	PNC 913214			
• Stainless steel side panel, right, H=700	PNC 913215			
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913233			
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913258			
Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913263			
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913265			
 Side reinforced panel only in combination with side shelf, for back-to-back installations, left 	PNC 913271			
 Side reinforced panel only in combination with side shelf, for back-to-back installation, right 	PNC 913272			
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913279			
 Stainless steel dividing panel, 800x700mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80) 	PNC 913668			

