

Modular Cooking Range Line thermaline 80 - 600 mm Cupboard base with 1 door, GN conform, 1 Side (H2) -H=450



588136 (MA1DCAFOOO)

Cupboard Base with 1 door, one-side operated, GN - H2

Short Form Specification

Item No.

600 mm wide cupboard base with 1 door with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

MODEL #	
NAME #	
SIS #	
AIA #	

Main Features

- Cupboard compartment for storage of pots, pans, sheet pans etc.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.


Construction

- IPX5 water resistance certification.
- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:

Electrolux PROFESSIONAL

Modular Cooking Range Line thermaline 80 - 600 mm Cupboard base with 1 door, GN conform, 1 Side (H2) - H=450

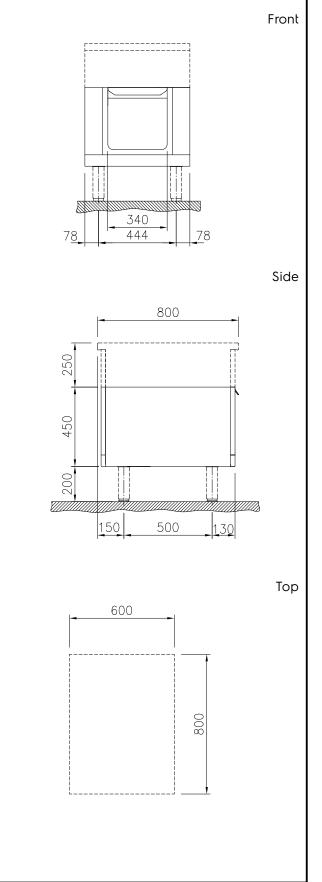

CE

DNVGL

Key Information:

External dimensions, Width:	
588136 (MAIDCAFOOO)	600 mm
External dimensions, Depth:	800 mm
External dimensions, Height:	450 mm
Cupboard Cavity Dimensions (width):	340 mm
Cupboard Cavity Dimensions (height):	330 mm
Cupboard Cavity Dimensions (depth): Net weight:	740 mm 22 kg



Modular Cooking Range Line thermaline 80 - 600 mm Cupboard base with 1 door, GN conform, 1 Side (H2) - H=450

Optional Accessories

Optional Accessories		
 Stainless steel side panel, 800x700mm, freestanding 	PNC 912509	
 Stainless steel front kicking strip, 600mm width 	PNC 912632	
 Stainless steel side kicking strip left and right, freestanding, 800mm width 	PNC 912655	
 Stainless steel side kicking strip left and right, against the wall, 800mm width 	PNC 912658	
 Stainless steel side kicking strip left and right, back-to-back, 1610mm width 	PNC 912661	
 Stainless steel plinth, against wall, 600mm width 	PNC 912842	
 Stainless steel plinth, freestanding, 600mm width 	PNC 912861	
 Stainless steel panel, 800x700mm, against wall, left side 	PNC 913093	
• Stainless steel panel, 800x700m, against the wall, right side	PNC 913097	
• Back panel, 600x450mm, for bases one-side operated	PNC 913165	
 Stainless steel side panel, left, H=700 	PNC 913214	
 Stainless steel side panel, right, H=700 	PNC 913215	
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913233	
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913258	
• Side reinforced panel only in combination with side shelf, for against the wall installations, left	PNC 913263	
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913265	
 Side reinforced panel only in combination with side shelf, for back-to-back installations, left 	PNC 913271	
 Side reinforced panel only in combination with side shelf, for back-to-back installation, right 	PNC 913272	
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913279	
 Stainless steel dividing panel, 800x700mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80) 	PNC 913668	

 Stainless steel side panel, 800x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)