

Modular Cooking Range Line thermaline 80 - 1000 mm Cupboard base with 2 doors, GN conform, 1 Side (H2) - H=450

| ITEM #  |
|---------|
| MODEL # |
| MODEL # |
| NAME #  |
| SIS #   |
| 313 #   |
| AIA#    |
|         |



588137 (MA1FCAJOOO)

Cupboard Base with 2 doors, one-side operated, GN - H2

# **Short Form Specification**

### Item No.

1000 mm wide cupboard base with 2 doors with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

# **Main Features**

- Cupboard compartment for storage of pots, pans, sheet pans etc.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth.


### Construction

- IPX5 water resistance certification.
- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

#### APPROVAL:





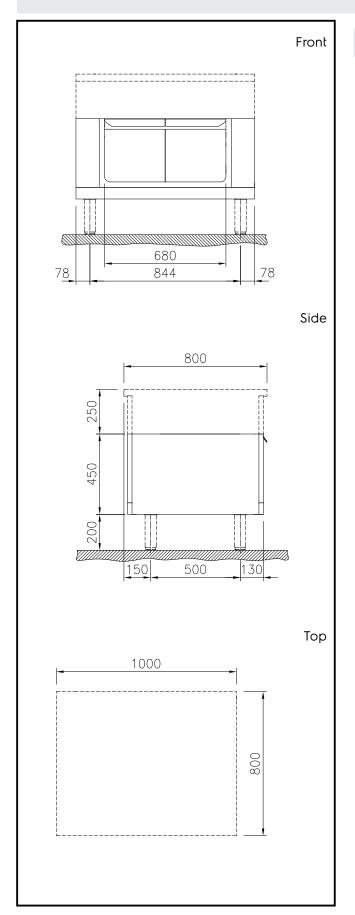

# **Key Information:**

| External dimensions, Width:                        |                 |
|--|-----------------|
| 588137 (MA1FCAJOOO)                                | 1000 mm         |
| External dimensions, Depth:                        | 800 mm          |
| External dimensions, Height:                       | 450 mm          |
| Cupboard Cavity Dimensions (width):                | 680 mm          |
| Cupboard Cavity Dimensions (height):               | 330 mm          |
| Cupboard Cavity Dimensions (depth):<br>Net weight: | 715 mm<br>30 kg |
|  |                 |







|  |             | Stainless steel side panel,  | PNC 913684 |  |
|--|-------------|--|------------|--|
| Optional Accessories   | DVIC 010500 | 800x700mm, flush-fitting (it should  |            |  |
| <ul> <li>Stainless steel side panel,<br/>800x700mm, freestanding</li> </ul>  | PNC 912509  | only be used against the wall,<br>against a niche and in between<br>Electrolux Professional thermaline |            |  |
| <ul> <li>Stainless steel front kicking strip,<br/>1000mm width</li> </ul>  | PNC 912636  | and ProThermetic appliances and external appliances - provided that                                    |            |  |
| <ul> <li>Stainless steel side kicking strip<br/>left and right, freestanding,<br/>800mm width</li> </ul>   | PNC 912655  | these have at least the same dimensions)   |            |  |
| <ul> <li>Stainless steel side kicking strip<br/>left and right, against the wall,<br/>800mm width</li> </ul>   | PNC 912658  |  |            |  |
| <ul> <li>Stainless steel side kicking strip<br/>left and right, back-to-back,<br/>1610mm width</li> </ul>  | PNC 912661  |  |            |  |
| <ul> <li>Stainless steel plinth, against<br/>wall, 1000mm width</li> </ul>   | PNC 912846  |  |            |  |
| <ul> <li>Stainless steel plinth,<br/>freestanding, 1000mm width</li> </ul>   | PNC 912865  |  |            |  |
| Stainless steel panel,<br>800x700mm, against wall, left<br>side  | PNC 913093  |  |            |  |
| <ul> <li>Stainless steel panel, 800x700m,<br/>against the wall, right side</li> </ul>  | PNC 913097  |  |            |  |
| Back panel, 1000x450mm, for<br>bases one-side operated   | PNC 913169  |  |            |  |
| • Stainless steel side panel, left,<br>H=700   | PNC 913214  |  |            |  |
| <ul> <li>Stainless steel side panel, right,<br/>H=700</li> </ul>   | PNC 913215  |  |            |  |
| <ul> <li>Perforated shelf for warming<br/>cabinets and cupboard bases<br/>(one-side operated TL80-85-90<br/>and two-side operated for TL80)</li> </ul>   | PNC 913235  |  |            |  |
| <ul> <li>Side reinforced panel only in<br/>combination with side shelf, for<br/>freestanding units</li> </ul>  | PNC 913258  |  |            |  |
| <ul> <li>Side reinforced panel only in<br/>combination with side shelf, for<br/>against the wall installations, left</li> </ul>                          | PNC 913263  |  |            |  |
| <ul> <li>Side reinforced panel only in<br/>combination with side shelf, for<br/>against the wall installations,<br/>right</li> </ul>                     | PNC 913265  |  |            |  |
| <ul> <li>Side reinforced panel only in<br/>combination with side shelf, for<br/>back-to-back installations, left</li> </ul>                              | PNC 913271  |  |            |  |
| <ul> <li>Side reinforced panel only in<br/>combination with side shelf, for<br/>back-to-back installation, right</li> </ul>                              | PNC 913272  |  |            |  |
| <ul> <li>Shelf fixation for TL80-85-90 one-<br/>side operated, TL80 two-side<br/>operated</li> </ul>   | PNC 913283  |  |            |  |
| Stainless steel dividing panel,<br>800x700mm, (it should only be<br>used between Electrolux<br>Professional thermaline Modular<br>80 and thermaline C80) | PNC 913668  |  |            |  |

