



Modular Cooking Range Line thermaline 80 - Sink unit on closed base, 1 Side, H=700



588213 (MAZAGAD300)

Sink Unit on Closed Base,
one-side operated

Short Form Specification

Item No.

Sink unit on closed base, with a large stainless steel tap, constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: Freestanding, one-side operated.

ITEM #
MODEL #
NAME #
SIS #
AIA #

Main Features

- Large stainless steel tap.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.

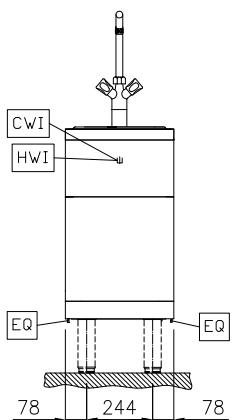
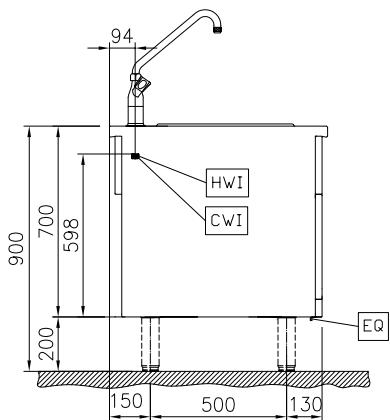
Construction

- IPX5 water resistance certification.
- Fitted on a closed base.
- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.


APPROVAL:



Experience the Excellence
www.electroluxprofessional.com

Front

Side


CWI = Cold Water inlet 1 (cleaning)
 D = Drain
 HWI = Hot water inlet

Top

Water:

Inlet water line size: 3/4"
 Drain line size: 1"
 Incoming Cold/hot Water line size: 3/4"

Key Information:

External dimensions, Width: 400 mm
 External dimensions, Depth: 800 mm
 External dimensions, Height: 700 mm
 Net weight: 28 kg

Optional Accessories

- Connecting rail kit, 800mm
- Stainless steel side panel, 800x700mm, freestanding
- Portioning shelf, 400mm width
- Portioning shelf, 400mm width
- Folding shelf, 300x800mm
- Folding shelf, 400x800mm
- Fixed side shelf, 200x800mm
- Fixed side shelf, 300x800mm
- Fixed side shelf, 400x800mm
- Stainless steel front kicking strip, 400mm width
- Stainless steel side kicking strip left and right, freestanding, 800mm width
- Stainless steel side kicking strip left and right, back-to-back, 1610mm width
- Stainless steel plinth, freestanding, 400mm width
- Connecting rail kit: modular 80 (on the left) to ProThermic tilting (on the right), ProThermic stationary (on the left) to ProThermic (on the right)
- Connecting rail kit: modular 80 (on the right) to ProThermic tilting (on the left), ProThermic stationary (on the right) to ProThermic (on the left)
- Endrail kit, flush-fitting, left
- Endrail kit, flush-fitting, right
- Endrail kit (12.5mm) for thermaline 80 units, left
- Endrail kit (12.5mm) for thermaline 80 units, right
- Stainless steel side panel, left, H=700
- Stainless steel side panel, right, H=700
- T-connection rail for back-to-back installations without backsplash (to be ordered as S-code)
- Insert profile D=800mm
- Endrail kit, (12.5mm), for back-to-back installation, left
- Endrail kit, (12.5mm), for back-to-back installation, right
- Endrail kit, flush-fitting, for back-to-back installation, left
- Endrail kit, flush-fitting, for back-to-back installation, right
- Side reinforced panel only in combination with side shelf, for freestanding units

PNC 912500	<input type="checkbox"/>	• Side reinforced panel only in combination with side shelf, for back-to-back installations, left	PNC 913271	<input type="checkbox"/>
PNC 912509	<input type="checkbox"/>	• Side reinforced panel only in combination with side shelf, for back-to-back installation, right	PNC 913272	<input type="checkbox"/>
PNC 912522	<input type="checkbox"/>	• Stainless steel dividing panel, 800x700mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80)	PNC 913668	<input type="checkbox"/>
PNC 912552	<input type="checkbox"/>	• Stainless steel side panel, 800x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermic appliances and external appliances - provided that these have at least the same dimensions)	PNC 913684	<input type="checkbox"/>
PNC 912577	<input type="checkbox"/>			
PNC 912578	<input type="checkbox"/>			
PNC 912583	<input type="checkbox"/>			
PNC 912584	<input type="checkbox"/>			
PNC 912585	<input type="checkbox"/>			
PNC 912630	<input type="checkbox"/>			
PNC 912655	<input type="checkbox"/>			
PNC 912661	<input type="checkbox"/>			
PNC 912859	<input type="checkbox"/>			
PNC 912971	<input type="checkbox"/>			
PNC 912972	<input type="checkbox"/>			
PNC 913109	<input type="checkbox"/>			
PNC 913110	<input type="checkbox"/>			
PNC 913200	<input type="checkbox"/>			
PNC 913201	<input type="checkbox"/>			
PNC 913214	<input type="checkbox"/>			
PNC 913215	<input type="checkbox"/>			
PNC 913227	<input type="checkbox"/>			
PNC 913230	<input type="checkbox"/>			
PNC 913249	<input type="checkbox"/>			
PNC 913250	<input type="checkbox"/>			
PNC 913253	<input type="checkbox"/>			
PNC 913254	<input type="checkbox"/>			
PNC 913258	<input type="checkbox"/>			