

Modular Cooking Range Line thermaline 80 - Sink unit on closed base, 1 Side, Backsplash, H=700

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**588214 (MAZAGBD300)**Sink Unit on Closed Base,
one-side operated with
backsplash

Short Form Specification

Item No. _____

Sink unit on closed base, with a large stainless steel tap, constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating.

IPX5 water resistant certification.

Configuration: Freestanding, one-side operated with backsplash.

Main Features

- Large stainless steel tap.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.


Construction

- IPX5 water resistance certification.
- Fitted on a closed base.
- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.


APPROVAL: _____

Modular Cooking Range Line thermaline 80 - Sink unit on closed base, 1 Side, Backsplash, H=700

Front

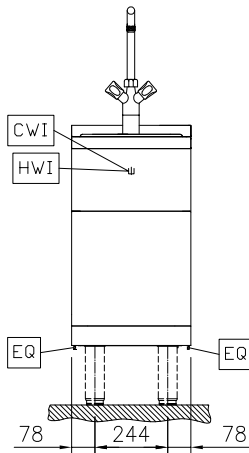


Side

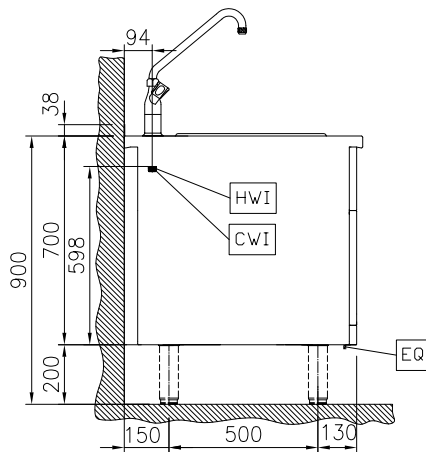

CWI = Cold Water inlet 1 (cleaning)
 D = Drain
 HWI = Hot water inlet

Top

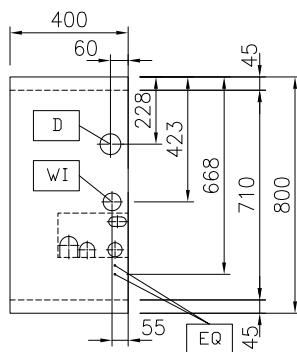

Water:

Inlet water line size: 3/4"
 Drain line size: 1"
 Incoming Cold/hot Water line size: 3/4"

Key Information:

External dimensions, Width: 400 mm
 External dimensions, Depth: 800 mm
 External dimensions, Height: 700 mm
 Net weight: 28 kg

Optional Accessories

- | | | | | | |
|---|------------|--------------------------|---|------------|--------------------------|
| • Connecting rail kit for appliances with backsplash, 800mm | PNC 912497 | ☐ | • Stainless steel dividing panel, 800x700mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80) | PNC 913668 | ☐ |
| • Portioning shelf, 400mm width | PNC 912522 | ☐ | • Stainless steel side panel, 800x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions) | PNC 913684 | ☐ |
| • Portioning shelf, 400mm width | PNC 912552 | ☐ | | | |
| • Folding shelf, 300x800mm | PNC 912577 | ☐ | | | |
| • Folding shelf, 400x800mm | PNC 912578 | ☐ | | | |
| • Fixed side shelf, 200x800mm | PNC 912583 | ☐ | | | |
| • Fixed side shelf, 300x800mm | PNC 912584 | ☐ | | | |
| • Fixed side shelf, 400x800mm | PNC 912585 | ☐ | | | |
| • Stainless steel front kicking strip, 400mm width | PNC 912630 | ☐ | | | |
| • Stainless steel side kicking strip left and right, against the wall, 800mm width | PNC 912658 | ☐ | | | |
| • Stainless steel side kicking strip left and right, back-to-back, 1610mm width | PNC 912661 | ☐ | | | |
| • Stainless steel plinth, against wall, 400mm width | PNC 912840 | ☐ | | | |
| • Connecting rail kit for appliances with backsplash: modular 80 (on the left), ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right) | PNC 912977 | ☐ | | | |
| • Connecting rail kit for appliances with backsplash: modular 80 (on the right), ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left) | PNC 912978 | ☐ | | | |
| • Back panel, 400x700mm, for units with backsplash | PNC 913009 | ☐ | | | |
| • Stainless steel panel, 800x700mm, against wall, left side | PNC 913093 | ☐ | | | |
| • Stainless steel panel, 800x700mm, against the wall, right side | PNC 913097 | ☐ | | | |
| • Endrail kit, flush-fitting, with backsplash, left | PNC 913113 | ☐ | | | |
| • Endrail kit, flush-fitting, with backsplash, right | PNC 913114 | ☐ | | | |
| • Endrail kit (12.5mm) for thermaline 80 units with backsplash, left | PNC 913204 | ☐ | | | |
| • Endrail kit (12.5mm) for thermaline 80 units with backsplash, right | PNC 913205 | ☐ | | | |
| • U-clamping rail for back-to-back installations with backsplash (to be ordered as S-code) | PNC 913226 | ☐ | | | |
| • Insert profile D=800mm | PNC 913230 | ☐ | | | |
| • Side reinforced panel only in combination with side shelf, for against the wall installations, left | PNC 913263 | ☐ | | | |
| • Side reinforced panel only in combination with side shelf, for against the wall installations, right | PNC 913265 | ☐ | | | |