

Modular Cooking Range Line thermaline 80 - 900 mm Open base, 1 Side (H2) - H=550

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



588216 (MA1ADAIOOO)

Open Base, one-side operated - H2

Short Form Specification

Item No.

900 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

Main Features

- Open base compartment for storage of pots, pans, sheet pans, etc.
- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

Construction


- IPX5 water resistance certification.
- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:





Modular Cooking Range Line thermaline 80 - 900 mm Open base, 1 Side (H2) - H=550

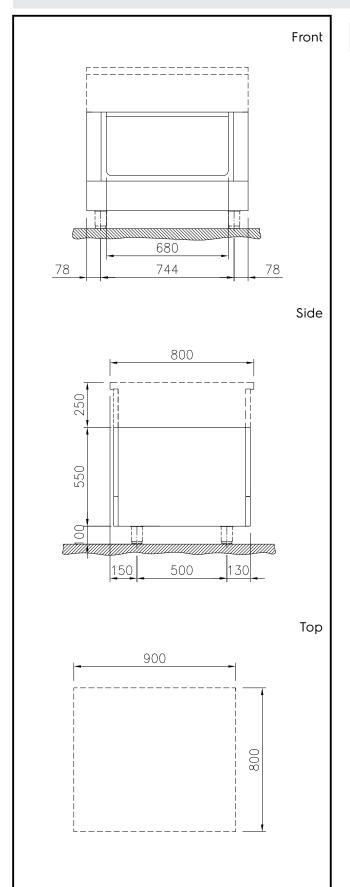

Key Information:

External dimensions, Width: 588216 (MAIADAIOOO)

588216 (MA1ADAIOOO) 900 mm **External dimensions, Depth:** 800 mm **External dimensions, Height:** 550 mm

Cupboard Cavity Dimensions

680 mm

Cupboard Cavity Dimensions (height):

330 mm

Cupboard Cavity Dimensions (depth):

740 mm

Net weight:

23 kg





Modular Cooking Range Line thermaline 80 - 900 mm Open base, 1 Side (H2) - H=550

		Stainless steel side panel,	PNC 913685	
Optional Accessories	DNIC 010500	800x800mm, flush-fitting (it should only be used against the wall,		
 Stainless steel side panel, 800x800mm, freestanding 	PNC 912508	against a niche and in between Electrolux Professional thermaline		
 Stainless steel front kicking strip, 900mm width 	PNC 912599	and ProThermetic appliances and external appliances - provided that		
 Stainless steel side kicking strips left and right, freestanding, 800mm width 	PNC 912619	these have at least the same dimensions)		
 Stainless steel side kicking strips left and right, against the wall, 800mm width 	PNC 912622			
 Stainless steel side kicking strips left and right, back-to-back, 1610mm width 	PNC 912625			
 Stainless steel plinth, against wall, 900mm width 	PNC 912807			
 Stainless steel plinth, freestanding, 900mm width 	PNC 912826			
 Stainless steel panel, 800x800mm, against wall, left side 	PNC 913094			
 Stainless steel panel, 800x800mm, flush-fitting, against wall, right side 	PNC 913098			
 Back panel, 900x450mm, for bases one-side operated 	PNC 913183			
 Stainless steel side panel, left, h=800 	PNC 913216			
 Stainless steel side panel, right, h=800 	PNC 913217			
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913235			
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913257			
 Side reinforced panel only in combination with side shelf for against the wall installations, left 	PNC 913264			
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913266			
 Side reinforced panel only in combination with side shelf, for back-to-back installations, left 	PNC 913273			
 Side reinforced panel only in combination with side shelf, for back-to-back installation, right 	PNC 913274			
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913283			
Stainless steel dividing panel, 800x800mm, (it should only be used between Electrolux Professional thermaline Modular	PNC 913669			



Professional thermaline Modular 80 and thermaline C80)