

## Modular Cooking Range Line thermaline 80 - 500 mm Open base, GN conform, 1 Side (H2) - H=550

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



588220 (MAIBDAEOOO)

Open Base, one-side operated, GN - H2

## **Short Form Specification**

#### Item No.

500 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Open storage space in the base accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

#### **Main Features**

- IPX5 water resistance certification.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth.

#### Construction


- Hygienic design of the open base compartment with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.
- Storage space in the base of the appliance that can accept GN1/1 containers.

## APPROVAL:





# Modular Cooking Range Line thermaline 80 - 500 mm Open base, GN conform, 1 Side (H2) - H=550

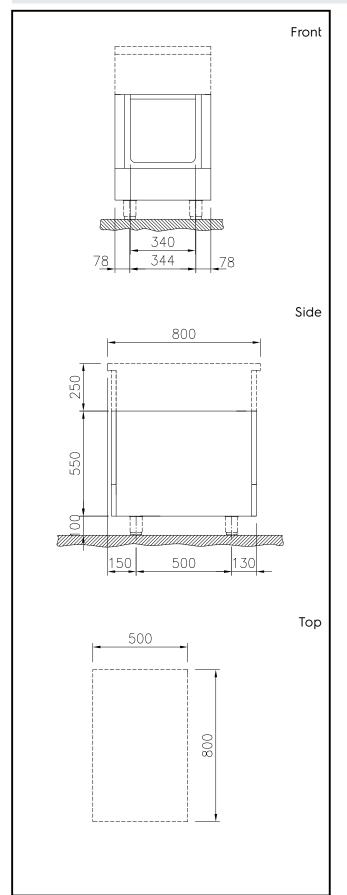

### **Key Information:**

External dimensions, Width: 588220 (MAIBDAEOOO) 500 mm External dimensions, Depth: 800 mm External dimensions, Height: 550 mm **Cupboard Cavity Dimensions** 340 mm **Cupboard Cavity Dimensions** 

(height): **Cupboard Cavity Dimensions** 

740 mm

330 mm

(depth): Net weight: 19 kg





# Modular Cooking Range Line thermaline 80 - 500 mm Open base, GN conform, 1 Side (H2) - H=550

Optional Accessories		• Stainless steel side panel, 800x800mm, flush-fitting (it should	PNC 913685	
Stainless steel side panel, 800x800mm, freestanding	PNC 912508	only be used against the wall, against a niche and in between		
Stainless steel front kicking strip, 500mm width	PNC 912595	Electrolux Professional thermaline and ProThermetic appliances and		
<ul> <li>Stainless steel side kicking strips left and right, freestanding, 800mm width</li> </ul>	PNC 912619	external appliances - provided that these have at least the same dimensions)		
<ul> <li>Stainless steel side kicking strips left and right, against the wall, 800mm width</li> </ul>	PNC 912622			
<ul> <li>Stainless steel side kicking strips left and right, back-to-back, 1610mm width</li> </ul>	PNC 912625			
<ul> <li>Stainless steel plinth, against wall, 500mm width</li> </ul>	PNC 912803			
<ul> <li>Stainless steel plinth, freestanding, 500mm width</li> </ul>	PNC 912822			
<ul> <li>Stainless steel panel, 800x800mm, against wall, left side</li> </ul>	PNC 913094			
<ul> <li>Stainless steel panel, 800x800mm, flush-fitting, against wall, right side</li> </ul>	PNC 913098			
<ul> <li>Back panel, 500x550mm, for bases one-side operated</li> </ul>	PNC 913179			
<ul> <li>Stainless steel side panel, left, h=800</li> </ul>	PNC 913216			
<ul> <li>Stainless steel side panel, right, h=800</li> </ul>	PNC 913217			
<ul> <li>Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)</li> </ul>	PNC 913233			
<ul> <li>Side reinforced panel only in combination with side shelf, for freestanding units</li> </ul>	PNC 913257			
<ul> <li>Side reinforced panel only in combination with side shelf for against the wall installations, left</li> </ul>	PNC 913264			
<ul> <li>Side reinforced panel only in combination with side shelf, for against the wall installations, right</li> </ul>	PNC 913266			
<ul> <li>Side reinforced panel only in combination with side shelf, for back-to-back installations, left</li> </ul>	PNC 913273			
<ul> <li>Side reinforced panel only in combination with side shelf, for back-to-back installation, right</li> </ul>	PNC 913274			
<ul> <li>Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated</li> </ul>	PNC 913279			
Stainless steel dividing panel, 800x800mm, (it should only be used between Electrolux Professional thermaline Modular	PNC 913669			



80 and thermaline C80)