

Modular Cooking Range Line thermaline 80 - 400 mm Cupboard base with 1 door, GN conform, 1 Side (H2) -H=550



588223 (MAIDDADOOO)

Cupboard Base with 1 door, one-side operated, GN - H2

Short Form Specification

Item No.

400 mm wide cupboard base with 1 door with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

ITEM #	
MODEL #	
NAME #	
SIS #	
AIA #	

Main Features

- Cupboard compartment for storage of pots, pans, sheet pans etc.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.


Construction

- IPX5 water resistance certification.
- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:

Electrolux PROFESSIONAL

Modular Cooking Range Line thermaline 80 - 400 mm Cupboard base with 1 door, GN conform, 1 Side (H2) - H=550

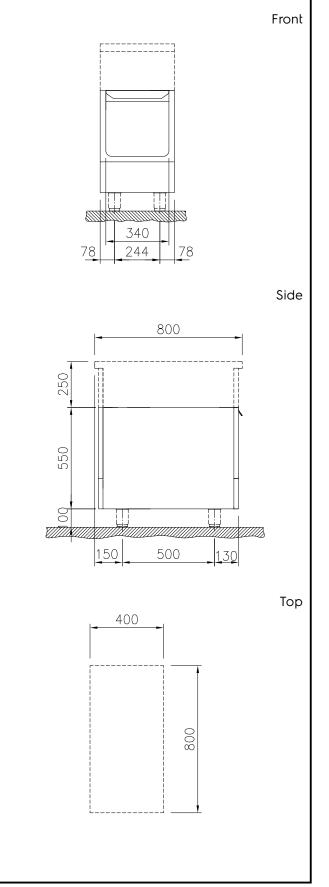

CE

DNV-GL

Key Information:

External dimensions, Width:	
588223 (MA1DDADOOO)	400 mm
External dimensions, Depth:	800 mm
External dimensions, Height:	550 mm
Cupboard Cavity Dimensions (width):	340 mm
Cupboard Cavity Dimensions (height):	330 mm
Cupboard Cavity Dimensions (depth): Net weight:	715 mm 22 kg
	ZZKY

Modular Cooking Range Line thermaline 80 - 400 mm Cupboard base with 1 door, GN conform, 1 Side (H2) - H=550 The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Modular Cooking Range Line thermaline 80 - 400 mm Cupboard base with 1 door, GN conform, 1 Side (H2) - H=550

Optional Accessories

Optional Accessories		
 Stainless steel side panel, 800x800mm, freestanding 	PNC 912508	
• Stainless steel front kicking strip, 400mm width	PNC 912594	
• Stainless steel side kicking strips left and right, freestanding, 800mm width	PNC 912619	
 Stainless steel side kicking strips left and right, against the wall, 800mm width 	PNC 912622	
 Stainless steel side kicking strips left and right, back-to-back, 1610mm width 	PNC 912625	
 Stainless steel plinth, against wall, 400mm width 	PNC 912802	
 Stainless steel plinth, freestanding, 400mm width 	PNC 912821	
 Stainless steel panel, 800x800mm, against wall, left side 	PNC 913094	
 Stainless steel panel, 800x800mm, flush-fitting, against wall, right side 	PNC 913098	
Back panel, 400x550mm, for bases one-side operated	PNC 913178	
 Stainless steel side panel, left, h=800 	PNC 913216	
 Stainless steel side panel, right, h=800 	PNC 913217	
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913233	
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913257	
• Side reinforced panel only in combination with side shelf for against the wall installations, left	PNC 913264	
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913266	
• Side reinforced panel only in combination with side shelf, for back-to-back installations, left	PNC 913273	
 Side reinforced panel only in combination with side shelf, for back-to-back installation, right 	PNC 913274	
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913279	
• Stainless steel dividing panel, 800x800mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline (280)	PNC 913669	

 Stainless steel side panel, 800x800mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)

80 and thermaline C80)