

Modular Cooking Range Line thermaline 80 - 600 mm Cupboard base with 1 door, GN conform, 1 Side (H2) -H=550

ITEM #
MODEL #
MODEL #
NAME #
CIC #
SIS #
AIA #



588225 (MAIDDAFOOO)

Cupboard Base with 1 door, one-side operated, GN - H2

# **Short Form Specification**

#### Item No.

600 mm wide cupboard base with 1 door with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

## **Main Features**

- Cupboard compartment for storage of pots, pans, sheet pans etc.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860\_2 with 70 mm recessed plinth.


#### Construction

- IPX5 water resistance certification.
- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

#### APPROVAL:





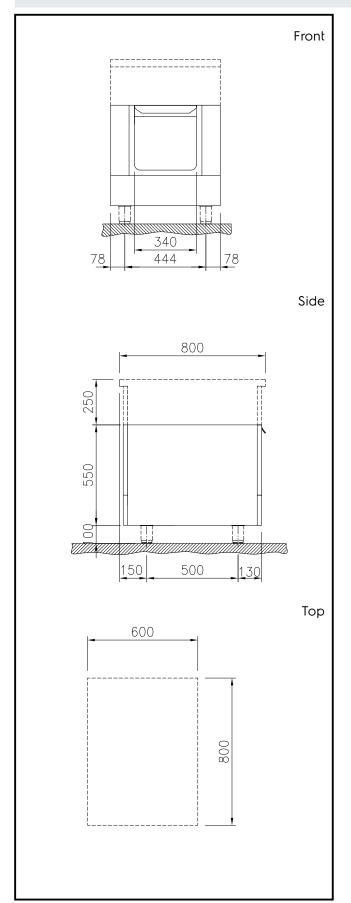

### **Key Information:**

External dimensions, Width:
588225 (MAIDDAFOOO)

External dimensions, Depth:
External dimensions, Height:
Cupboard Cavity Dimensions
(width):

Cupboard Cavity Dimensions
(height):

Cupboard Cavity Dimensions
(neight):

330 mm

(depth): 715 mm Net weight: 24 kg





# Modular Cooking Range Line thermaline 80 - 600 mm Cupboard base with 1 door, GN conform, 1 Side (H2) - H=550

		Stainless steel side panel,	PNC 913685	
Optional Accessories	DNIC 010500	800x800mm, flush-fitting (it should		
<ul> <li>Stainless steel side panel, 800x800mm, freestanding</li> </ul>	PNC 912508	only be used against the wall, against a niche and in between Electrolux Professional thermaline		
<ul> <li>Stainless steel front kicking strip, 600mm width</li> </ul>	PNC 912596	and ProThermetic appliances and external appliances - provided that		
<ul> <li>Stainless steel side kicking strips left and right, freestanding, 800mm width</li> </ul>	PNC 912619	these have at least the same dimensions)		
<ul> <li>Stainless steel side kicking strips left and right, against the wall, 800mm width</li> </ul>	PNC 912622			
<ul> <li>Stainless steel side kicking strips left and right, back-to-back, 1610mm width</li> </ul>	PNC 912625			
<ul> <li>Stainless steel plinth, against wall, 600mm width</li> </ul>	PNC 912804			
<ul> <li>Stainless steel plinth, freestanding, 600mm width</li> </ul>	PNC 912823			
<ul> <li>Stainless steel panel, 800x800mm, against wall, left side</li> </ul>	PNC 913094			
• Stainless steel panel, 800x800mm, flush-fitting, against wall, right side	PNC 913098			
Back panel, 600x450mm, for bases one-side operated	PNC 913180			
• Stainless steel side panel, left, h=800	PNC 913216			
<ul> <li>Stainless steel side panel, right, h=800</li> </ul>	PNC 913217			
<ul> <li>Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80)</li> </ul>	PNC 913233			
<ul> <li>Side reinforced panel only in combination with side shelf, for freestanding units</li> </ul>	PNC 913257			
<ul> <li>Side reinforced panel only in combination with side shelf for against the wall installations, left</li> </ul>	PNC 913264			
<ul> <li>Side reinforced panel only in combination with side shelf, for against the wall installations, right</li> </ul>	PNC 913266			
<ul> <li>Side reinforced panel only in combination with side shelf, for back-to-back installations, left</li> </ul>	PNC 913273			
<ul> <li>Side reinforced panel only in combination with side shelf, for back-to-back installation, right</li> </ul>	PNC 913274			
<ul> <li>Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated</li> </ul>	PNC 913279			
<ul> <li>Stainless steel dividing panel, 800x800mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80)</li> </ul>	PNC 913669			

