

Modular Cooking Range Line thermaline 80 - 1000 mm Cupboard base with 2 doors, GN conform, 1 Side (H2) - H=550

ITEM #
MODEL "
MODEL #
NAME #
CIC "
SIS #
AIA #



588226 (MA1FDAJOOO)

Cupboard Base with 2 doors, one-side operated, GN - H2

Short Form Specification

Item No.

1000 mm wide cupboard base with 2 doors with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Cupboard storage space accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

Main Features

- Cupboard compartment for storage of pots, pans, sheet pans etc.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Unit constructed according to DIN 18860_2 with 70 mm recessed plinth.


Construction

- IPX5 water resistance certification.
- Hygienic design of the base cupboard with large round edges.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Storage space in the base of the appliance accepts GN1/1 containers.
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:





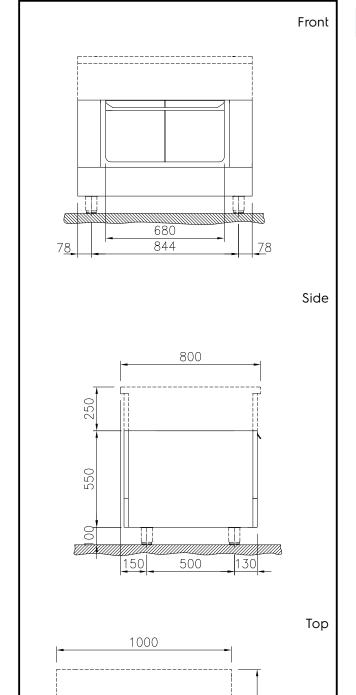

Key Information:

External dimensions, Width:

588226 (MAIFDAJOOO) 1000 mm **External dimensions, Depth:** 800 mm **External dimensions, Height:** 550 mm

Cupboard Cavity Dimensions (width):

(depth):

680 mm

Cupboard Cavity Dimensions (height):

330 mm

Cupboard Cavity Dimensions

715 mm

Net weight: 32 kg







Optional Accessories		• Stainless steel side panel, 800x800mm, flush-fitting (it should	PNC 913685	
Stainless steel side panel, 800x800mm, freestanding	PNC 912508	only be used against the wall, against a niche and in between		
Stainless steel front kicking strip, 1000mm width	PNC 912600	Electrolux Professional thermaline and ProThermetic appliances and		
 Stainless steel side kicking strips left and right, freestanding, 800mm width 	PNC 912619	external appliances - provided that these have at least the same dimensions)		
 Stainless steel side kicking strips left and right, against the wall, 800mm width 	PNC 912622			
 Stainless steel side kicking strips left and right, back-to-back, 1610mm width 	PNC 912625			
 Stainless steel plinth, against wall, 1000mm width 	PNC 912808			
 Stainless steel plinth, freestanding, 1000mm width 	PNC 912827			
 Stainless steel panel, 800x800mm, against wall, left side 	PNC 913094			
• Stainless steel panel, 800x800mm, flush-fitting, against wall, right side	PNC 913098			
Back panel, 1000x550mm, for bases one-side operated	PNC 913184			
 Stainless steel side panel, left, h=800 	PNC 913216			
 Stainless steel side panel, right, h=800 	PNC 913217			
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913235			
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913257			
 Side reinforced panel only in combination with side shelf for against the wall installations, left 	PNC 913264			
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913266			
 Side reinforced panel only in combination with side shelf, for back-to-back installations, left 	PNC 913273			
 Side reinforced panel only in combination with side shelf, for back-to-back installation, right 	PNC 913274			
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913283			
Stainless steel dividing panel, 800x800mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80)	PNC 913669			

