

Modular Cooking Range Line thermaline 80 - 500 mm Passthrough open base, GN conform, 2 Sides (H2) -H=550



588234 (MA2BDCEOOO)

Passthrough Open Base, two-side operated, GN - H2

### **Short Form Specification**

#### Item No.

500 mm wide open passthrough base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Open storage space in the base accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: Two-side operated freestanding base, hygienic class H2.

| ITEM #       |  |
|--------------|--|
| MODEL #      |  |
| NAME #       |  |
| <u>SIS #</u> |  |
| AIA #        |  |
|              |  |

### **Main Features**

- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.


### Construction

- IPX5 water resistance certification.
- Hygienic design of the open base compartment with large round edges.
- Storage space in the base of the appliance that can accept GN1/1 containers.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

#### APPROVAL:

# Electrolux PROFESSIONAL

### Modular Cooking Range Line thermaline 80 - 500 mm Passthrough open base, GN conform, 2 Sides (H2) - H=550

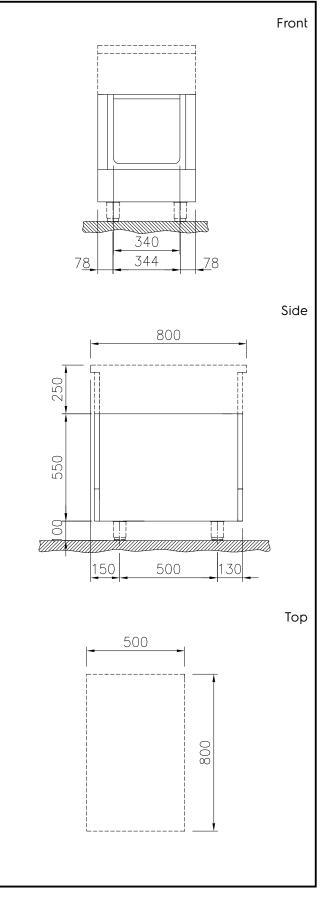

CE

DNVGL

### Key Information:

| External dimensions, Width:                           |                 |
|---|-----------------|
| 588234 (MA2BDCEOOO)                                   | 500 mm          |
| External dimensions, Depth:                           | 800 mm          |
| External dimensions, Height:                          | 550 mm          |
| Cupboard Cavity Dimensions (width):                   | 340 mm          |
| Cupboard Cavity Dimensions (height):                  | 330 mm          |
| Cupboard Cavity Dimensions<br>(depth):<br>Net weight: | 760 mm<br>19 kg |
|   |                 |

Modular Cooking Range Line thermaline 80 - 500 mm Passthrough open base, GN conform, 2 Sides (H2) - H=550 The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



## **Optional Accessories**

dimensions)

| Optional Accessories   |            |  |
|--|------------|--|
| <ul> <li>Stainless steel side panel,<br/>800x800mm, freestanding</li> </ul>  | PNC 912508 |  |
| <ul> <li>Stainless steel front kicking strip,<br/>500mm width</li> </ul>   | PNC 912595 |  |
| <ul> <li>Stainless steel side kicking strips<br/>left and right, freestanding,<br/>800mm width</li> </ul>  | PNC 912619 |  |
| <ul> <li>Stainless steel plinth,<br/>freestanding, 500mm width</li> </ul>  | PNC 912822 |  |
| <ul> <li>Perforated shelf for warming<br/>cabinets and cupboard bases<br/>(one-side operated TL80-85-90<br/>and two-side operated for TL80)</li> </ul>   | PNC 913233 |  |
| • Side reinforced panel only in combination with side shelf, for freestanding units  | PNC 913257 |  |
| <ul> <li>Shelf fixation for TL80-85-90 one-<br/>side operated, TL80 two-side<br/>operated</li> </ul>   | PNC 913279 |  |
| • Stainless steel dividing panel,<br>800x800mm, (it should only be<br>used between Electrolux<br>Professional thermaline Modular<br>80 and thermaline C80)   | PNC 913669 |  |
| • Stainless steel side panel,<br>800x800mm, flush-fitting (it<br>should only be used against the<br>wall, against a niche and in<br>between Electrolux Professional<br>thermaline and ProThermetic<br>appliances and external<br>appliances - provided that these<br>have at least the same<br>dimensional | PNC 913685 |  |

