

Modular Cooking Range Line thermaline 80 - 600 mm Passthrough open base, GN conform, 2 Sides (H2) -H=550



588235 (MA2BDCFOOO)

Passthrough Open Base, two-side operated, GN - H2

Short Form Specification

Item No.

600 mm wide open passthrough base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Open storage space in the base accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: Two-side operated freestanding base, hygienic class H2.

ITEM #	
MODEL #	
NAME #	
<u>SIS #</u>	
AIA #	

Main Features

- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.


Construction

- IPX5 water resistance certification.
- Hygienic design of the open base compartment with large round edges.
- Storage space in the base of the appliance that can accept GN1/1 containers.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:

Electrolux PROFESSIONAL

Modular Cooking Range Line thermaline 80 - 600 mm Passthrough open base, GN conform, 2 Sides (H2) - H=550

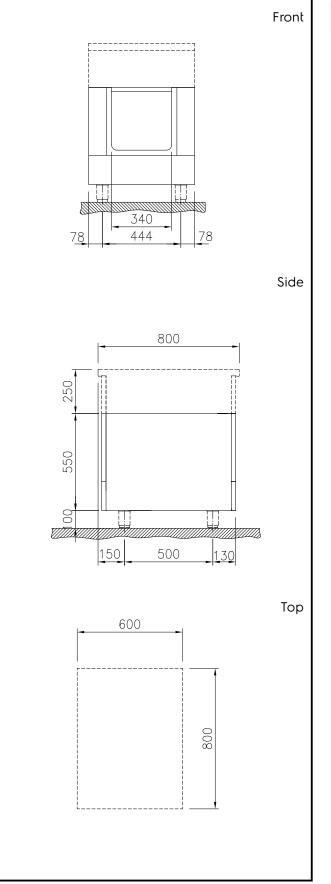

CE

DNV-GL

Key Information:

External dimensions, Width:	
588235 (MA2BDCFOOO)	600 mm
External dimensions, Depth:	800 mm
External dimensions, Height:	550 mm
Cupboard Cavity Dimensions (width):	340 mm
Cupboard Cavity Dimensions (height):	330 mm
Cupboard Cavity Dimensions (depth): Net weight:	760 mm 20 kg
Net weight:	20 Kg

Modular Cooking Range Line thermaline 80 - 600 mm Passthrough open base, GN conform, 2 Sides (H2) - H=550 The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Optional Accessories

dimensions)

Optional Accessories		
 Stainless steel side panel, 800x800mm, freestanding 	PNC 912508	
 Stainless steel front kicking strip, 600mm width 	PNC 912596	
 Stainless steel side kicking strips left and right, freestanding, 800mm width 	PNC 912619	
 Stainless steel plinth, freestanding, 600mm width 	PNC 912823	
 Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) 	PNC 913233	
• Side reinforced panel only in combination with side shelf, for freestanding units	PNC 913257	
 Shelf fixation for TL80-85-90 one- side operated, TL80 two-side operated 	PNC 913279	
• Stainless steel dividing panel, 800x800mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80)	PNC 913669	
• Stainless steel side panel, 800x800mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)	PNC 913685	