



Electrolux
PROFESSIONAL

**Modular Cooking Range Line
thermaline 80 - 700 mm Open base,
GN conform, 1 Side (H2) - H=550**

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



588327 (MA1BDAGOOO)

Open Base, one-side
operated, GN - H2

Short Form Specification

Item No. _____

700 mm wide open base compartment to store pots, pans, sheet pans, etc. with hygienic design and round edges. Internal frame for heavy duty sturdiness in stainless steel. Flat surface construction, easily cleanable. Open storage space in the base accepts GN 1/1 containers.

IPX5 water resistant certification.

Configuration: One-side operated freestanding base, hygienic class H2.

Main Features

- All major components may be easily accessed from the front.
- Unit to be placed below modular top appliances to store pots, pans, sheet pans, etc.

Construction

- IPX5 water resistance certification.
- Hygienic design of the open base compartment with large round edges.
- Storage space in the base of the appliance that can accept GN1/1 containers.
- 2 mm top in 1.4301 (AISI 304).
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL: _____




Experience the Excellence
www.electroluxprofessional.com




Electrolux
PROFESSIONAL

Modular Cooking Range Line
thermaline 80 - 700 mm Open base,
GN conform, 1 Side (H2) - H=550


Front

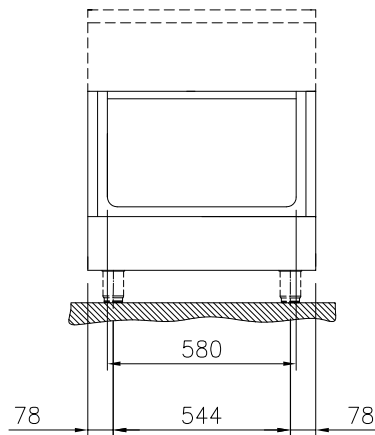

Side

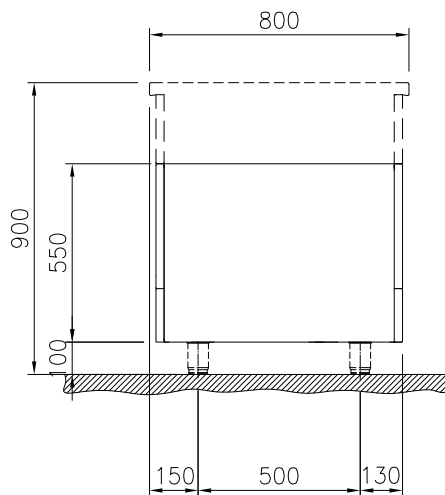

Top



Key Information:

External dimensions, Width:	
588327 (MA1BDAG000)	700 mm
External dimensions, Depth:	800 mm
External dimensions, Height:	550 mm
Cupboard Cavity Dimensions (width):	580 mm
Cupboard Cavity Dimensions (height):	330 mm
Cupboard Cavity Dimensions (depth):	740 mm
Net weight:	21 kg



Modular Cooking Range Line
thermaline 80 - 700 mm Open base, GN conform, 1 Side (H2) - H=550

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2025.11.29

Optional Accessories

- | | | | | | |
|--|------------|--------------------------|---|------------|--------------------------|
| • Stainless steel side panel, 800x800mm, freestanding | PNC 912508 | ☐ | • Stainless steel side panel, 800x800mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions) | PNC 913685 | ☐ |
| • Stainless steel front kicking strip, 700mm width | PNC 912597 | ☐ | | | |
| • Stainless steel side kicking strips left and right, freestanding, 800mm width | PNC 912619 | ☐ | | | |
| • Stainless steel side kicking strips left and right, against the wall, 800mm width | PNC 912622 | ☐ | | | |
| • Stainless steel side kicking strips left and right, back-to-back, 1610mm width | PNC 912625 | ☐ | | | |
| • Stainless steel plinth, against wall, 700mm width | PNC 912805 | ☐ | | | |
| • Stainless steel plinth, freestanding, 700mm width | PNC 912824 | ☐ | | | |
| • Stainless steel panel, 800x800mm, against wall, left side | PNC 913094 | ☐ | | | |
| • Stainless steel panel, 800x800mm, flush-fitting, against wall, right side | PNC 913098 | ☐ | | | |
| • Back panel, 700x450mm, for bases one-side operated | PNC 913181 | ☐ | | | |
| • Stainless steel side panel, left, h=800 | PNC 913216 | ☐ | | | |
| • Stainless steel side panel, right, h=800 | PNC 913217 | ☐ | | | |
| • Perforated shelf for warming cabinets and cupboard bases (one-side operated TL80-85-90 and two-side operated for TL80) | PNC 913234 | ☐ | | | |
| • Side reinforced panel only in combination with side shelf, for freestanding units | PNC 913257 | ☐ | | | |
| • Side reinforced panel only in combination with side shelf for against the wall installations, left | PNC 913264 | ☐ | | | |
| • Side reinforced panel only in combination with side shelf, for against the wall installations, right | PNC 913266 | ☐ | | | |
| • Side reinforced panel only in combination with side shelf, for back-to-back installations, left | PNC 913273 | ☐ | | | |
| • Side reinforced panel only in combination with side shelf, for back-to-back installation, right | PNC 913274 | ☐ | | | |
| • Shelf fixation for TL80-85-90 one-side operated, TL80 two-side operated | PNC 913281 | ☐ | | | |
| • Stainless steel dividing panel, 800x800mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80) | PNC 913669 | ☐ | | | |