



**Electrolux**  
PROFESSIONAL

## Modular Cooking Range Line thermaline 80 - Electric Warming Plate Top, 1 Side

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



588336  
(MARAAAF0BO)

Electric Warming Plate, 1-sided operated

### Main Features

- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Metal knobs with embedded hygienic "soft-touch" grip for easier handling and cleaning. The special design of the controls prevents infiltration of liquids or soil into vital components.
- Fast deployment with full heating power immediately.
- The smooth glass-ceramic surface can be quickly and easily cleaned, thus providing maximum hygiene.
- Almost the entire surface of the ceramic plate can be used without "dead" spots.
- Pans can easily be moved from one area to another without lifting.
- All major components may be easily accessed from the front.
- Overheat protection via a temperature sensor that switches off part of the heating element in the event of over temperature. Temperature range from 30°C to 110°C.

### Construction

- 2 mm top in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860\_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in 1.4301 (AISI 304).
- Unit constructed according to DIN 18860\_2 with 20 mm drop nose top.
- IPX5 water resistance certification.

### Optional Accessories

- |                                                                                                                                                              |            |                          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------------------|
| • Scraper for cook tops                                                                                                                                      | PNC 910601 | <input type="checkbox"/> |
| • Connecting rail kit, 800mm                                                                                                                                 | PNC 912500 | <input type="checkbox"/> |
| • Portioning shelf, 600mm width                                                                                                                              | PNC 912524 | <input type="checkbox"/> |
| • Portioning shelf, 600mm width                                                                                                                              | PNC 912554 | <input type="checkbox"/> |
| • Folding shelf, 300x800mm                                                                                                                                   | PNC 912577 | <input type="checkbox"/> |
| • Folding shelf, 400x800mm                                                                                                                                   | PNC 912578 | <input type="checkbox"/> |
| • Fixed side shelf, 200x800mm                                                                                                                                | PNC 912583 | <input type="checkbox"/> |
| • Fixed side shelf, 300x800mm                                                                                                                                | PNC 912584 | <input type="checkbox"/> |
| • Fixed side shelf, 400x800mm                                                                                                                                | PNC 912585 | <input type="checkbox"/> |
| • Connecting rail kit: modular 80 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic (on the right) | PNC 912971 | <input type="checkbox"/> |
| • Connecting rail kit: modular 80 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic (on the left) | PNC 912972 | <input type="checkbox"/> |
| • Endrail kit, flush-fitting, left                                                                                                                           | PNC 913109 | <input type="checkbox"/> |


APPROVAL: \_\_\_\_\_




Experience the Excellence  
[www.electroluxprofessional.com](http://www.electroluxprofessional.com)

- |                                                                                                 |            |                          |
|-------------------------------------------------------------------------------------------------|------------|--------------------------|
| • Endrail kit, flush-fitting, right                                                             | PNC 913110 | <input type="checkbox"/> |
| • Endrail kit (12.5mm) for thermaline 80 units, left                                            | PNC 913200 | <input type="checkbox"/> |
| • Endrail kit (12.5mm) for thermaline 80 units, right                                           | PNC 913201 | <input type="checkbox"/> |
| • T-connection rail for back-to-back installations without backsplash (to be ordered as S-code) | PNC 913227 | <input type="checkbox"/> |
| • Insert profile D=800mm                                                                        | PNC 913230 | <input type="checkbox"/> |
| • Endrail kit, (12.5mm), for back-to-back installation, left                                    | PNC 913249 | <input type="checkbox"/> |
| • Endrail kit, (12.5mm), for back-to-back installation, right                                   | PNC 913250 | <input type="checkbox"/> |
| • Endrail kit, flush-fitting, for back-to-back installation, left                               | PNC 913253 | <input type="checkbox"/> |
| • Endrail kit, flush-fitting, for back-to-back installation, right                              | PNC 913254 | <input type="checkbox"/> |

Front

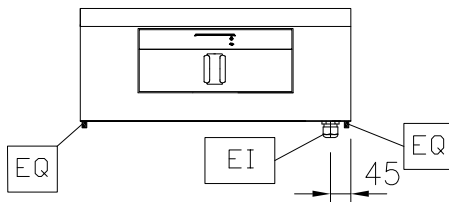


Side

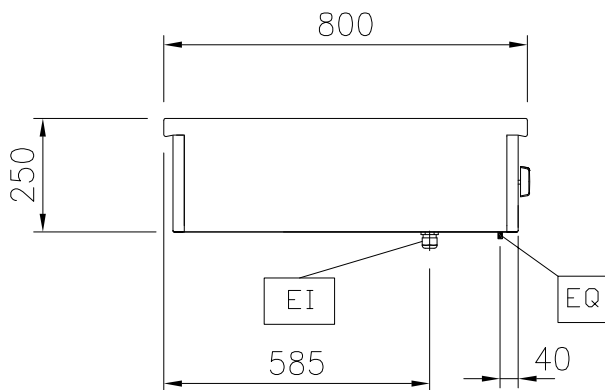

EI = Electrical inlet (power)  
EQ = Equipotential screw

Top

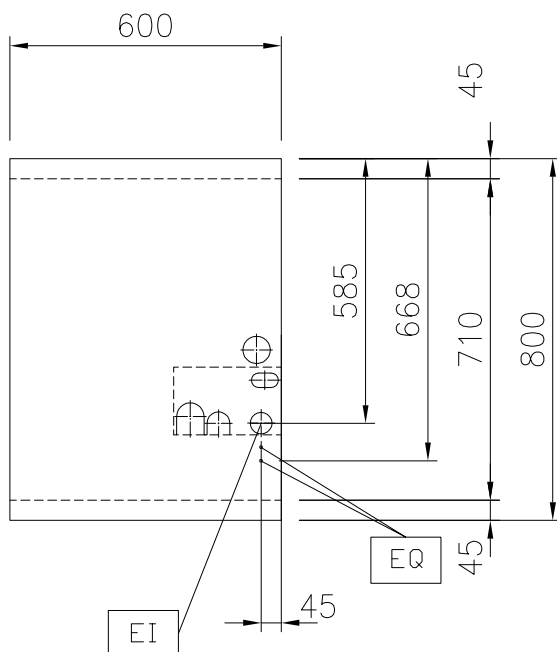

## Electric

Supply voltage: 230 V/1N ph/50/60 Hz  
Total Watts: 0.55 kW

## Key Information:

External dimensions, Width: 600 mm  
External dimensions, Depth: 800 mm  
External dimensions, Height: 250 mm  
Net weight: 30 kg  
Configuration: One-Side Operated;Top  
Front Plates Power: 0 - 0 kW  
Front Plates dimensions:

## Sustainability

Current consumption: 2.39 Amps