

Modular Cooking Range Line thermaline 80 - Water mixing tap with lever, 1 Side - H=700

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA#		



588386 (MAEAGAB3OO)

Water mixing tap with one lever, one-side operated

Short Form Specification

Item No.

Water mixing tap with lever for hot and cold water. Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth. Internal frame for heavy duty sturdiness in stainless steel. 2 mm top in 1.4301 (AISI 304). Flat surface construction, easily cleanable. THERMODUL connection system enables seamless worktop when units are connected and avoids soil penetrating. IPX5 water resistant certification. Configuration: Freestanding, one-side operated.

Main Features

- Water mixing unit for hot and cold water.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Large stainless steel tap.

Construction


- 2 mm top in 1.4301 (AISI 304).
- IPX5 water resistance certification.
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:





Modular Cooking Range Line thermaline 80 - Water mixing tap with lever, 1 Side - H=700

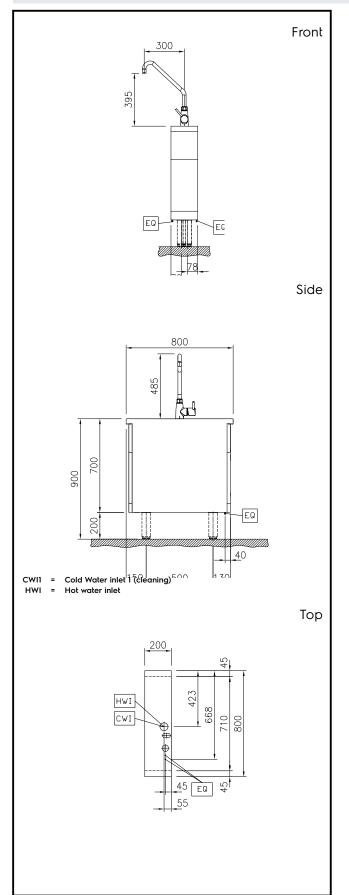

Water:

Inlet water line size:

588386 (MAEAGAB3OO) 3/4" Incoming Cold/hot Water line

size: 3/4"

Key Information:

External dimensions, Width: 200 mm
External dimensions, Depth: 800 mm
External dimensions, Height: 700 mm
Net weight: 23 kg





Modular Cooking Range Line thermaline 80 - Water mixing tap with lever, 1 Side - H=700

Optional Accessories			Stainless steel dividing panel, 800x700mm, (it should only be used)	PNC 913668	
Connecting rail kit, 800mmStainless steel side panel,	PNC 912500 PNC 912509		between Electrolux Professional thermaline Modular 80 and thermaline C80)		
800x700mm, freestandingPortioning shelf, 200mm width	PNC 912520		Stainless steel side panel,	PNC 913684	
Portioning shelf, 200mm width	PNC 912550		800x700mm, flush-fitting (it should only be used against the wall,		
Folding shelf, 300x800mmFolding shelf, 400x800mm	PNC 912577 PNC 912578		against a niche and in between Electrolux Professional thermaline		
• Fixed side shelf, 200x800mm	PNC 912583		and ProThermetic appliances and		
• Fixed side shelf, 300x800mm	PNC 912584	_	external appliances - provided that these have at least the same		
• Fixed side shelf, 400x800mm	PNC 912585		dimensions)		
 Stainless steel plinth, freestanding, 200mm width 	PNC 912857		·		
 Connecting rail kit: modular 80 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic (on the right) 					
 Connecting rail kit: modular 80 (on the right) to ProThermetic tilling (on the left), ProThermetic stationary (on the right) to ProThermetic (on the left) 	PNC 912972				
 Endrail kit, flush-fitting, left 	PNC 913109				
Endrail kit, flush-fitting, right	PNC 913110				
• Endrail kit (12.5mm) for thermaline 80 units, left					
• Endrail kit (12.5mm) for thermaline 80 units, right					
• Stainless steel side panel, left, H=700	PNC 913214				
• Stainless steel side panel, right, H=700	PNC 913215				
 T-connection rail for back-to- back installations without backsplash 	PNC 913227				
 Insert profile D=800mm 	PNC 913230				
 Endrail kit, (12.5mm), for back-to- back installation, left 					
back installation, right	PNC 913250				
 Endrail kit, flush-fitting, for back- to-back installation, left 	PNC 913253				
 Endrail kit, flush-fitting, for back- to-back installation, right 	PNC 913254	_			
 Side reinforced panel only in combination with side shelf, for freestanding units 	PNC 913258				
 Side reinforced panel only in combination with side shelf, for back-to-back installations, left 	PNC 913271				
 Side reinforced panel only in combination with side shelf, for back-to-back installation, right 	PNC 913272				

