

Modular Cooking Range Line thermaline 80 - Water mixing tap with lever, 1 Side - H=700



TEM #	
10DEL #	
IAME #	
ils #	_
AIA #	

Main Features

- Water mixing unit for hot and cold water.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Large stainless steel tap.


Construction

- 2 mm top in 1.4301 (AISI 304).
- IPX5 water resistance certification.
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:

Electrolux PROFESSIONAL

Modular Cooking Range Line thermaline 80 - Water mixing tap with lever, 1 Side - H=700

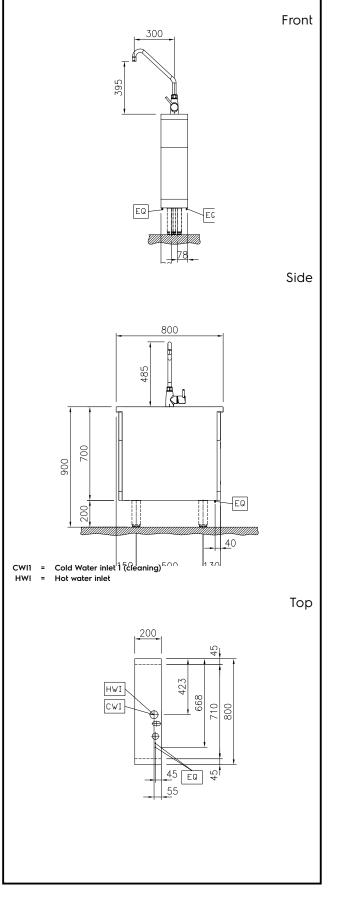

Water:

Inlet water line size:	
588386 (MAEAGAB3OO)	3/4"
Incoming Cold/hot Water line	
size:	3/4"

Key Information:

External dimensions, Width:	200 mm
External dimensions, Depth:	800 mm
External dimensions, Height:	700 mm
Net weight:	23 kg

Modular Cooking Range Line thermaline 80 - Water mixing tap with lever, 1 Side - H=700

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Optional Accessories

Connecting rail kit, 800mm PNC 912500 Stainless steel side panel, PNC 912509 800x700mm, freestanding PNC 912520 Portioning shelf, 200mm width Portioning shelf, 200mm width PNC 912550 Folding shelf, 300x800mm PNC 912577 Folding shelf, 400x800mm PNC 912578 • Fixed side shelf, 200x800mm PNC 912583 • Fixed side shelf, 300x800mm PNC 912584 Fixed side shelf, 400x800mm PNC 912585 Stainless steel plinth, PNC 912857 freestanding, 200mm width • Connecting rail kit: modular 80 PNC 912971 (on the left) to ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic (on the right) • Connecting rail kit: modular 80 PNC 912972 (on the right) to ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic (on the left) • Endrail kit, flush-fitting, left PNC 913109 PNC 913110 Endrail kit, flush-fitting, right • Endrail kit (12.5mm) for thermaline PNC 913200 80 units, left Endrail kit (12.5mm) for thermaline PNC 913201 80 units, right • Stainless steel side panel, left, PNC 913214 H=700 Stainless steel side panel, right, PNC 913215 H=700 PNC 913227 T-connection rail for back-toback installations without backsplash PNC 913230 Insert profile D=800mm • Endrail kit, (12.5mm), for back-to- PNC 913249 back installation, left • Endrail kit, (12.5mm), for back-to- PNC 913250 🛛 back installation, right • Endrail kit, flush-fitting, for back-PNC 913253 to-back installation, left • Endrail kit, flush-fitting, for back-PNC 913254 to-back installation, right Side reinforced panel only in PNC 913258 combination with side shelf, for freestanding units PNC 913271 • Side reinforced panel only in

- combination with side shelf, for back-to-back installations, left Side reinforced panel only in PNC 913272
- combination with side shelf, for back-to-back installation, right

Modular Cooking Range Line thermaline 80 - Water mixing tap with lever, 1 Side - H=700

- Stainless steel dividing panel, PNC 913668 800x700mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80) • Stainless steel side panel, PNC 913684 800x700mm, flush-fitting (it should
- only be used against the wall, against a niche and in between **Electrolux Professional thermaline** and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.