


Modular Cooking Range Line thermaline 80 - Water mixing tap with lever, 1 Side with Backsplash - H=700

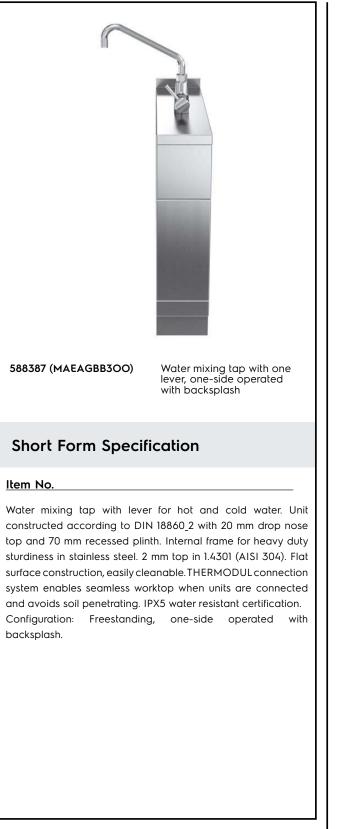

ТЕМ #
10DEL #
IAME #
IS #
NA #

Main Features

- Water mixing unit for hot and cold water.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Large stainless steel tap.


Construction

- 2 mm top in 1.4301 (AISI 304).
- IPX5 water resistance certification.
- Unit constructed according to DIN 18860_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

APPROVAL:

Electrolux PROFESSIONAL

Modular Cooking Range Line thermaline 80 - Water mixing tap with lever, 1 Side with Backsplash - H=700

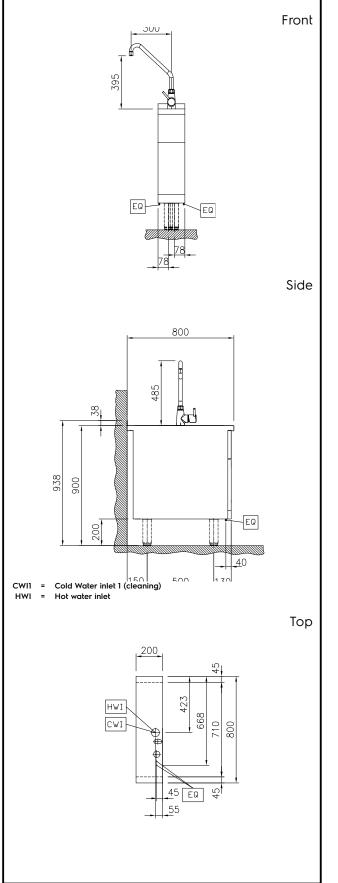

CE

DNVGL

Water:

Inlet water line size:	
588387 (MAEAGBB3OO)	3/4"
Incoming Cold/hot Water line	
size:	3/4"

Key Information:

External dimensions, Width:	200 mm
External dimensions, Depth:	800 mm
External dimensions, Height:	700 mm
Net weight:	23 kg

Modular Cooking Range Line thermaline 80 - Water mixing tap with lever, 1 Side with Backsplash -H=700 The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



Modular Cooking Range Line thermaline 80 - Water mixing tap with lever, 1 Side with Backsplash - H=700

Optional Accessories

Optional Accessories		
• Connecting rail kit for appliances with backsplash, 800mm	PNC 912497	
 Portioning shelf, 200mm width 	PNC 912520	
• Portioning shelf, 200mm width	PNC 912550	
• Folding shelf, 300x800mm	PNC 912577	
• Folding shelf, 400x800mm	PNC 912578	
• Fixed side shelf, 200x800mm	PNC 912583	
• Fixed side shelf, 300x800mm	PNC 912584	
• Fixed side shelf, 400x800mm	PNC 912585	
Stainless steel plinth, against	PNC 912838	
wall, 200mm width		_
 Connecting rail kit for appliances with backsplash: modular 80 (on the left), ProThermetic tilting (on the right), ProThermetic stationary (on the left) to ProThermetic tilting (on the right) 	PNC 912977	
• Connecting rail kit for appliances with backsplash: modular 80 (on the right), ProThermetic tilting (on the left), ProThermetic stationary (on the right) to ProThermetic tilting (on the left)	PNC 912978	
• Back panel, 200x700mm, for units with backsplash	PNC 913007	
 Stainless steel panel, 800x700mm, against wall, left side 	PNC 913093	
• Stainless steel panel, 800x700m, against the wall, right side	PNC 913097	
• Endrail kit, flush-fitting, with backsplash, left	PNC 913113	
 Endrail kit, flush-fitting, with backsplash, right 	PNC 913114	
• Endrail kit (12.5mm) for thermaline 80 units with backsplash, left	PNC 913204	
• Endrail kit (12.5mm) for thermaline 80 units with backsplash, right	PNC 913205	
• U-clamping rail for back-to-back installations with backsplash	PNC 913226	
 Insert profile D=800mm 	PNC 913230	
Side reinforced panel only in	PNC 913263	
combination with side shelf, for against the wall installations, left	1110 /10200	-
 Side reinforced panel only in combination with side shelf, for against the wall installations, right 	PNC 913265	
 Stainless steel dividing panel, 800x700mm, (it should only be used between Electrolux Professional thermaline Modular 80 and thermaline C80) 	PNC 913668	

 Stainless steel side panel, 800x700mm, flush-fitting (it should only be used against the wall, against a niche and in between Electrolux Professional thermaline and ProThermetic appliances and external appliances - provided that these have at least the same dimensions)

PNC 913684