


Modular Cooking Range Line thermaline 80 - Water mixing tap with knobs, 1 Side - H=800

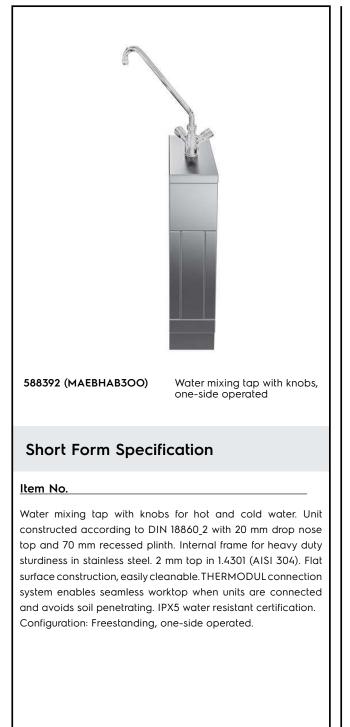

ITEM #			
MODEL #			
NAME #			
SIS #			
AIA #			

### **Main Features**

- Water mixing unit for hot and cold water.
- All major components may be easily accessed from the front.
- THERMODUL connection system creates a seamless work top when units are connected to each other thus avoiding soil penetrating vital components and facilitating the removal of units in case of replacement or service.
- Large stainless steel tap.


### Construction

- 2 mm top in 1.4301 (AISI 304).
- IPX5 water resistance certification.
- Unit constructed according to DIN 18860\_2 with 20 mm drop nose top and 70 mm recessed plinth.
- Flat surface construction with minimal hidden areas to easily clean all surfaces
- Internal frame for heavy duty sturdiness in stainless steel.

#### APPROVAL:

# Electrolux PROFESSIONAL

### Modular Cooking Range Line thermaline 80 - Water mixing tap with knobs, 1 Side - H=800

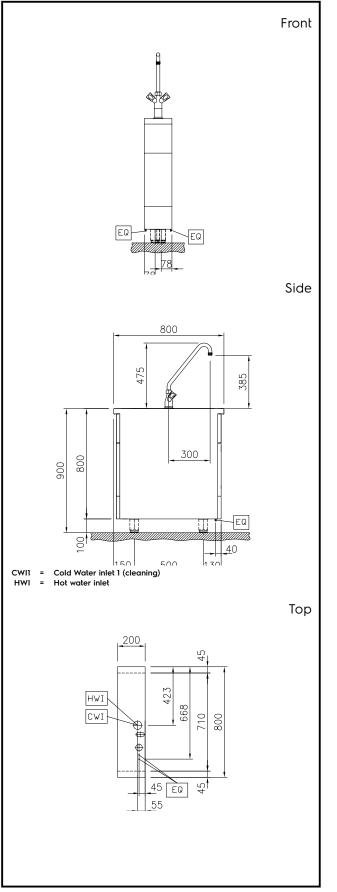

CE

DNVGL

### Water:

Inlet water line size: 3/4" Incoming Cold/hot Water line size: 3/4"

### Key Information:

External dimensions, Width:	200 mm
External dimensions, Depth:	800 mm
External dimensions, Height:	800 mm
Net weight:	25 kg

Modular Cooking Range Line thermaline 80 - Water mixing tap with knobs, 1 Side - H=800

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.



## **Optional Accessories**

Op	cional Accessories			
• Co	onnecting rail kit, 800mm	PNC	912500	
	ainless steel side panel, D0x800mm, freestanding	PNC	912508	
• Pc	ortioning shelf, 200mm width	PNC	912520	
	ortioning shelf, 200mm width	PNC	912550	
	olding shelf, 300x800mm		912577	
	olding shelf, 400x800mm		912578	
	xed side shelf, 200x800mm		912583	
	xed side shelf, 300x800mm		912584	
	xed side shelf, 400x800mm		912585	
	ainless steel plinth,		912303	
fre	eestanding, 200mm width			_
(o (o ste	onnecting rail kit: modular 80 n the left) to ProThermetic tilting n the right), ProThermetic ationary (on the left) to oThermetic (on the right)	PNC	912971	
(o till ste	onnecting rail kit: modular 80 n the right) to ProThermetic ting (on the left), ProThermetic ationary (on the right) to oThermetic (on the left)	PNC	912972	
	ndrail kit, flush-fitting, left	PNC	913109	
	ndrail kit, flush-fitting, right	PNC	913110	
• Er	ndrail kit (12.5mm) for thermaline ) units, left		913200	
• Er	ndrail kit (12.5mm) for thermaline ) units, right	PNC	913201	
• St	ainless steel side panel, left, 800	PNC	913216	
	ainless steel side panel, right, 800	PNC	913217	
bo bo	connection rail for back-to- ack installations without acksplash (to be ordered as S- ode)	PNC	913227	
	sert profile D=800mm	PNC	913230	
• Er	ndrail kit, (12.5mm), for back-to- ack installation, left		913249	
• Er	ndrail kit, (12.5mm), for back-to- ack installation, right	PNC	913250	
• Er	ndrail kit, flush-fitting, for back- -back installation, left	PNC	913253	
	ndrail kit, flush-fitting, for back- -back installation, right	PNC	913254	
• Si	de reinforced panel only in ombination with side shelf, for eestanding units	PNC	913257	
• Si	de reinforced panel only in ombination with side shelf, for ack-to-back installations, left	PNC	913273	
CC	de reinforced panel only in ombination with side shelf, for ack-to-back installation, right	PNC	913274	

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.